




16A05G Thru 16A10G



General Purpose Rectifiers Glass Passivation Junction

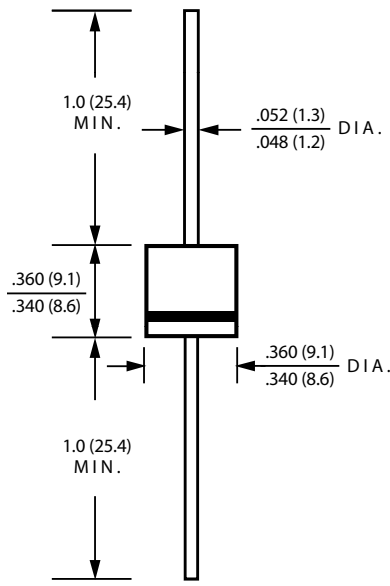

R-6

Dimensions in inches and (millimeters)



Ordering Information	
Part Number	Remark
16AxxG	General
16AxxG-H	Halogen Free
16AxxG-Q	Automotive

PRIMARY CHARACTERISTICS	
I_F	16A
V_{RRM}	50~1000V
I_{FSM}	330A
V_F	1.2V
$T_J \text{ max}$	150°C

Features

- High current capability
- High surge current capability
- Low reverse current
- Component in accordance to RoHS 2002/95/EC
- AEC-Q101 qualified

Mechanical Data

- Cases: R-6
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Terminals: Lead free Plating (Tin Finish)
Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 2.047 grams (approximate)

MAXIMUM RATINGS (TA=25°C unless otherwise noted)									
PARAMETER	SYMBOL	16A05G	16A1G	16A2G	16A4G	16A6G	16A8G	16A10G	UNIT
Maximum repetitive peak reverse voltage	V_{RRM}	200	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	140	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	200	100	200	400	600	800	1000	V
Maximum average forward rectified current	I_F	16.0							A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	330.0							A
Maximum Instantaneous Forward Voltage $I_F=16A @ 25^\circ C$	V_F	1.2							V
Maximum DC Reverse Current @ $T_c=25^\circ C$ at Rated DC Blocking Voltage @ $T_c=100^\circ C$	I_R	10 200							uA
Typical Junction Capacitance(NOTE1)	C_j	70							pF
Typical Thermal Resistance	$R_{\theta Ja}$	80							°C/W
Operating Temperature Range	T_J	-55 to +150							°C
Storage Temperature Range	T_{STG}	-55 to +150							°C

NOTES:1.Measured at 1.0MHZ and applied reverse voltage of 4.0V DC



General Purpose Rectifiers Glass Passivation Junction

FIG. 1-TYPICAL FORWARD CURRENT DERATING CURVE

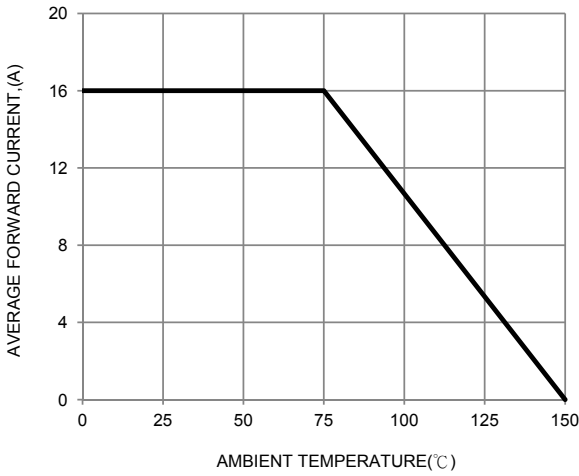


FIG. 2-TYPICAL FORWARD CHARACTERISTICS

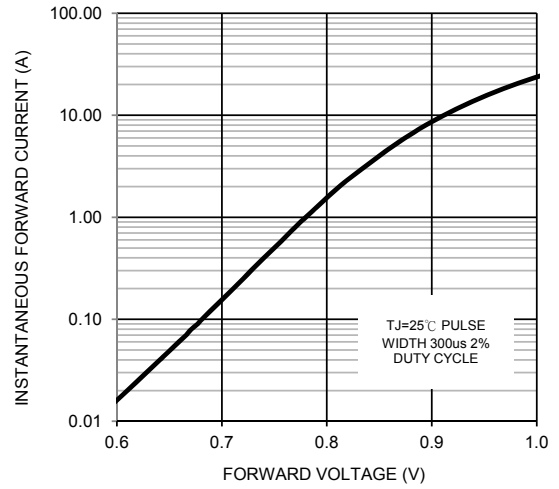


FIG. 3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

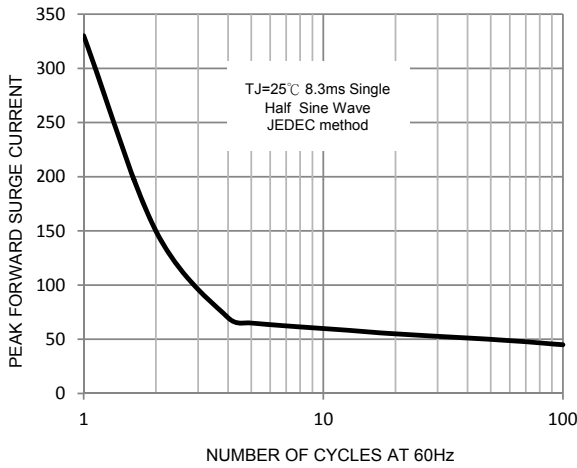


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

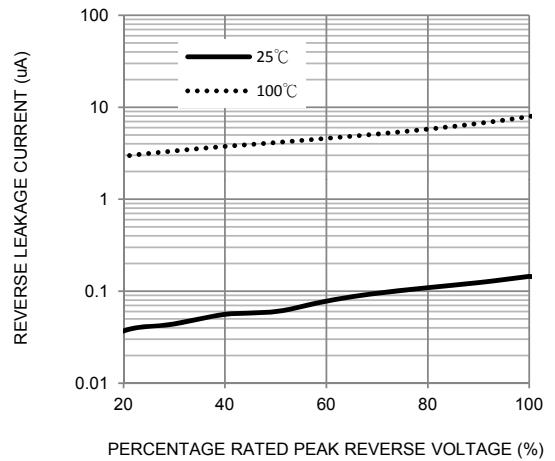


FIG. 5-TYPICAL JUNCTION CAPACITANCE

