


F3010AP TYPE

1ポール1スリーブ
(30x30x10.2mm)

Dimensions: Not to scale

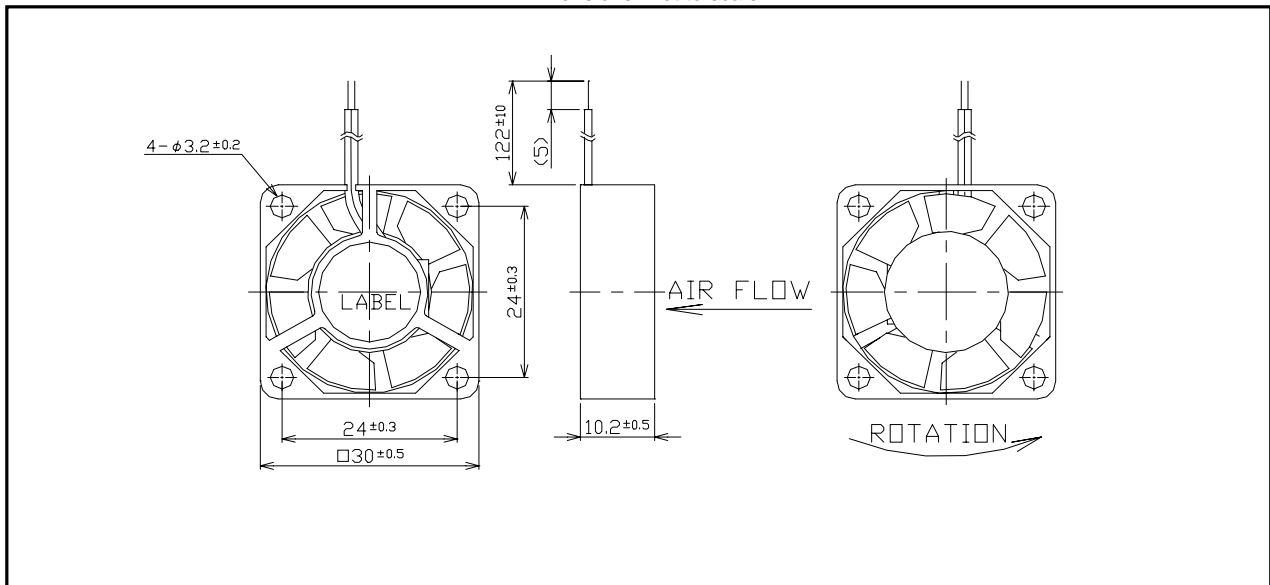

Specifications

| 機種名 (Model) | F3010AP-05PCV F3010AP-12RCW F3010AP-12UCW | | | | | |
|---|---|-----------|-----------|--------------------|--|--|
| 定格電圧 (DCV) Rated voltage | 5 | 12 | 12 | | | |
| 使用電圧範囲 (DCV) Operating voltage range | 4.5~5.5 | 10.2~13.8 | 10.2~13.8 | | | |
| 定格電流 (A) Rated current | 0.11 | 0.095 | 0.19 | | | |
| 定格入力 (W) Rated input | 0.55 | 1.14 | 2.28 | | | |
| 最大風量 (m ³ /min) Max Air Volume | 0.04 | 0.06 | 0.08 | | | |
| 最大静圧 (Pa) Max Static Pressure | 6.86 | 12.3 | 23.0 | | | |
| A特性音圧レベル (dB) Noise Lv at 1m (A-weighted) | 25 | 26 | 30 | | | |
| 回転速度 (min ⁻¹) Rotation frequency | 4,400 | 5,600 | 8,300 | | | |
| 期待寿命 (h) Life expectancy | 50,000 | | | Room temp-humidity | | |

| | |
|---------------------------------|---|
| 使用温度範囲(Operating temp. range) : | -5~+60°C(5V), -10 ~ +60°C(12V) ★★ |
| 保存温度範囲(Strage temp. range) : | -40 ~ +70 ★★ |
| リード線(Lead Wire) : | UL1007 AWG28: {5V: Red(+), Green(-)}, {12V: Red(+), Black(-)} |
| 重量(Weight): | 8.1g |
| 絶縁抵抗(Insulation resist.): | Min 10M Ω at DC500V (Between frame and leadwire) |
| 耐電圧(Voltage withstand): | 5mA (AC500V 1minute or AC600V 1 second, between frame and leadwire) |

★In room temperature and humidity ★★In room humidity Room temp.=20±15°C, Room humidity=65±20%

0203

Specifications subject to change without notice. Copyright ©2002 Shicoh Engineering Co., Ltd.

<http://www.shicoh.com>

