

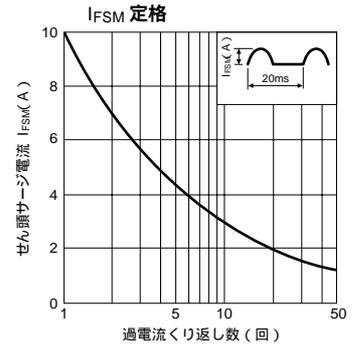
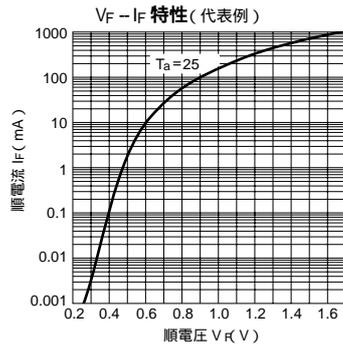
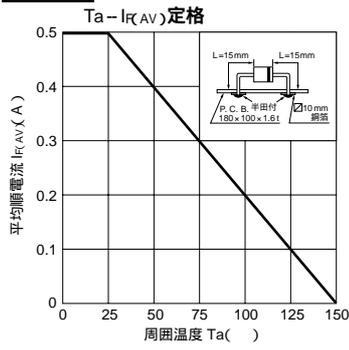
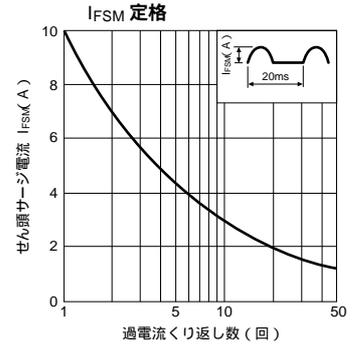


V _{RM} (V)	I _F (AV) (A)	パッケージ Axial (ボディ径/リード径)	品名	I _{FSM} (A)	T _j ()	T _{stg} ()	V _F (V) max	I _F (A)	I _R (μ A)	I _R (H) (mA)	T _a ()	trr ^① (ns)	trr ^② (ns)		R _{th(j-l)} (/W)	質量 (g)	
				50Hz 正弦半波単発					V _{R=V_{RM}} max	V _{R=V_{RM}} max			I _F /I _{RP} (mA)	I _F /I _{RP} (mA)			
600	10.0	TO-220F2Pin	FMX-G26S	100	40 ~ +150		1.5	10.0	100	20	150	30	100/100	25	100/200	4.0	2.1
	10.0	TO-220F2Pin	FMD-G26S	100	40 ~ +150		1.7	10.0	100	0.3	100	50	500/500	30	500/1000	4.0	2.1
	10.0	TO-220F2Pin	FMXA-1106S	100	40 ~ +150		1.98	10.0	100	30	15(Q T _j)	28	500/500			4.0	2.1
	1.0(2.0)	Axial(6.5/ 1.4)	RG 4AS	50	40 ~ +150		2.0	2.0	500	2.5	100	100	100/100	50	100/200	8	1.2
800	6.0	TO-220F(2素子)	FMC-28U	50	40 ~ +150		3.0	3.0	100	0.5	15(Q T _j)	70	500/500	35	500/1000	4.0	2.1
	6.0	TO-220F2Pin	FMC-G28S	50	40 ~ +150		3.0	3.0	100	1	15(Q T _j)	70	500/500	35	500/1000	4.0	2.1
	5.0	TO-220F2Pin	FMC-G28SL	60	40 ~ +150		3.0	3.0	200	2	15(Q T _j)	70	500/500	35	500/1000	4.0	2.1
1000	0.2	Axial(2.4/ 0.6)	AP01C	5	40 ~ +150		4.0	4.0	100	0.5	100	200	100/100	80	100/200	22	0.13
	0.2	Axial(2.7/ 0.6)	EP01C	5	40 ~ +150		4.0	4.0	5	0.05	100	200	100/100	80	100/200	20	0.2
	0.4	Axial(4.0/ 0.78)	RU 1P	10	40 ~ +150		4.0	4.0	5	0.05	100	100	100/100	50	100/200	15	0.4
	0.5	Axial(2.7/ 0.6)	EG01C	10	40 ~ +150		3.3	3.3	50	0.5	100	100	100/100	50	100/200	20	0.2
	0.7	Axial(4.0/ 0.78)	RG 1C	10	40 ~ +150		3.3	3.3	20	0.25	100	100	100/100	50	100/200	15	0.4
	4.0	TO-220F2Pin	FMG-G2CS	30	40 ~ +150		4.0	4.0	50	0.3	100	100	500/500	50	500/1000	4.0	2.1
	1.0(2.0)	Axial(6.5/ 1.4)	RG 4C	60	40 ~ +150		3.0	3.0	500	2.5	100	100	500/500	50	500/1000	8	1.2
1200	3.0	TO-220F2Pin(2素子)	FMC-26UA	50	40 ~ +150		4.0	4.0	500	3	15(Q T _j)	70	500/500	35	500/1000	4.0	2.1
1600	3.0	TO-220F2Pin(2素子)	FMC-28UA	50	40 ~ +150		6.0	6.0	100	0.5	15(Q T _j)	70	500/500	35	500/1000	4.0	2.1
2000	0.1	Axial(4.0/ 0.78)	RP 1H	5	40 ~ +150		7.0	7.0	20	0.01	100	100	10/20	50	10/20	15	0.4




EG01A

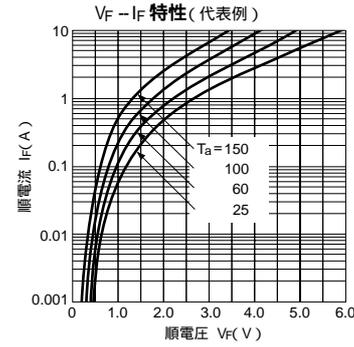




EG01C

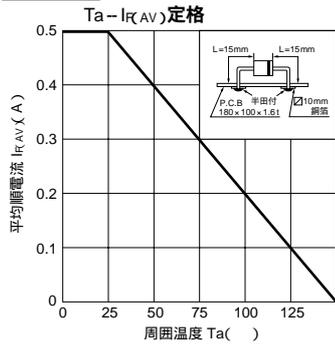

EL02Z

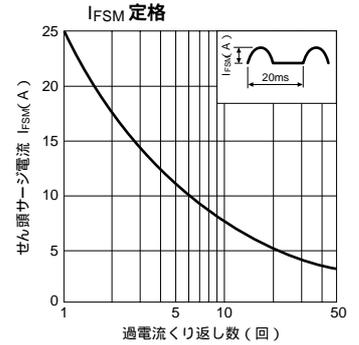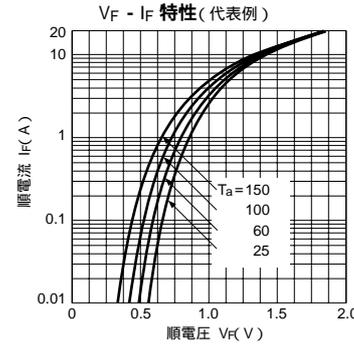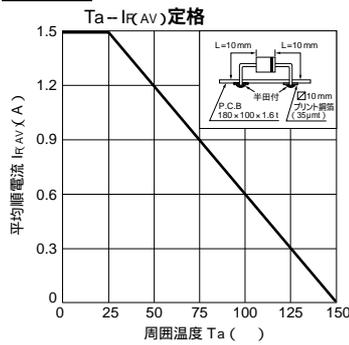

EN01Z

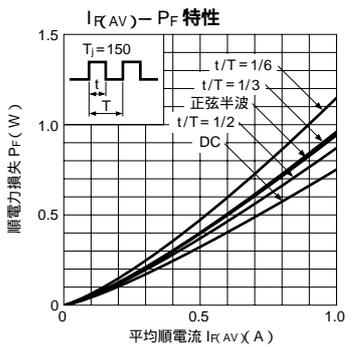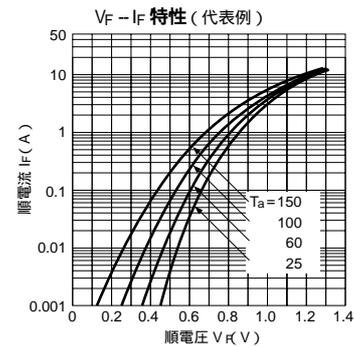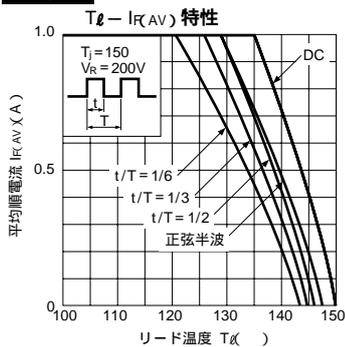

EG 1Y, EG 1Z, EG 1

