February 2008



# 74LCX14 Low Voltage Hex Inverter with 5V Tolerant Schmitt Trigger Inputs

### Features

- 5V tolerant inputs
- 2.3V–3.6V V<sub>CC</sub> specifications provided
- 6.5ns t<sub>PD</sub> max. (V<sub>CC</sub> = 3.3V), 10µA I<sub>CC</sub> max.
- Power down high impedance inputs and outputs
- ±24mA output drive (V<sub>CC</sub> = 3.0V)
- Implements patented noise/EMI reduction circuitry
- Latch-up performance exceeds JEDEC 78 conditions
- ESD performance:
- Human body model > 2000V
- Machine model > 200V
- Leadless DQFN package

### General Description

The LCX14 contains six inverter gates each with a Schmitt trigger input. They are capable of transforming slowly changing input signals into sharply defined, jitter-free output signals. In addition, they have a greater noise margin than conventional inverters.

The LCX14 has hysteresis between the positive-going and negative-going input thresholds (typically 1.0V) which is determined internally by transistor ratios and is essentially insensitive to temperature and supply voltage variations.

The inputs tolerate voltages up to 7V allowing the interface of 5V, 3V and 2.5V systems.

The 74LCX14 is fabricated with advanced CMOS technology to achieve high speed operation while maintaining CMOS low power dissipation.

### **Ordering Information**

Order Number	Package Number	Package Description
74LCX14M	M14A	14-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150" Narrow
74LCX14SJ	M14D	14-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide
74LCX14BQX <sup>(1)</sup>	MLP14A	14-Terminal Depopulated Quad Very-Thin Flat Pack No Leads (DQFN), JEDEC MO-241, 2.5 x 3.0mm
74LCX14MTC	MTC14	14-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide

#### Note:

1. DQFN package available in Tape and Reel only.


Device also available in Tape and Reel. Specify by appending suffix letter "X" to the ordering number.

All packages are lead free per JEDEC: J-STD-020B standard.


#### **Connection Diagrams** Pin Assignments for SOIC, SOP, and TSSOP 14 V<sub>CC</sub> I<sub>0</sub> 13 $\overline{0}_0$ I<sub>5</sub> 12 05 h 11 $\overline{0}_1$ ا₄ 10 $I_2$

 $\begin{array}{c} 1_{2} \\ \hline 0_{2} \\ \hline 0_{2} \\ \hline 0_{2} \\ \hline 0_{3} \\ \hline 0_{1} \\ \hline 0_{1} \\ \hline 0_{2} \\ \hline 0_{2} \\ \hline 0_{2} \\ \hline 0_{3} \hline 0_{3} \\ \hline 0_{3} \hline 0_{3} \\ \hline 0_{3} \hline 0_{3} \\ \hline 0_{3} \hline 0_{3} \hline 0_{3} \hline \hline 0_{3} \hline 0_{3} \hline \hline 0_{3} \hline$ 

### Pad Assignments for DQFN



## Logic Symbol



## **Truth Table**

Input	Output
A	ō
L	Н
Н	L

## **Pin Description**

Pin Names	Description
I <sub>n</sub>	Inputs
Ōn	Outputs

### **Absolute Maximum Ratings**

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

Symbol	Parameter	Rating
V <sub>CC</sub>	Supply Voltage	-0.5V to +7.0V
VI	DC Input Voltage	-0.5V to +7.0V
Vo	DC Output Voltage, Output in HIGH or LOW State <sup>(2)</sup>	-0.5V to V <sub>CC</sub> + 0.5V
I <sub>IK</sub>	DC Input Diode Current, V <sub>I</sub> < GND	–50mA
I <sub>ОК</sub>	DC Output Diode Current	
	V <sub>O</sub> < GND	–50mA
	V <sub>O</sub> > V <sub>CC</sub>	+50mA
Ι <sub>Ο</sub>	DC Output Source/Sink Current	±50mA
I <sub>CC</sub>	DC Supply Current per Supply Pin	±100mA
I <sub>GND</sub>	DC Ground Current per Ground Pin	±100mA
T <sub>STG</sub>	Storage Temperature	–65°C to +150°C

#### Note:

2. I<sub>O</sub> Absolute Maximum Rating must be observed.

## Recommended Operating Conditions<sup>(3)</sup>

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to absolute maximum ratings.

Symbol	Parameter	Min.	Max.	Units
V <sub>CC</sub>	Supply Voltage			
	Operating	2.0	3.6	V
	Data Retention	1.5	3.6	
VI	Input Voltage	0	5.5	V
Vo	Output Voltage, HIGH or LOW State	0	V <sub>CC</sub>	V
I <sub>OH</sub> / I <sub>OL</sub>	Output Current			
	$V_{CC} = 3.0V - 3.6V$		±24	mA
	V <sub>CC</sub> = 2.7V–3.0V		±12	
	$V_{CC} = 2.3V - 2.7V$		±8	

Note:

3. Unused inputs must be held HIGH or LOW. They may not float.

### **DC Electrical Characteristics**

				T <sub>A</sub> =40°C	to +85°C	
Symbol	Parameter	V <sub>CC</sub> (V)	Conditions	Min.	Max.	Units
V <sub>t+</sub>	Positive Input Threshold	2.5		0.9	1.7	V
		3.0		1.2	2.2	
V <sub>t</sub> -	Negative Input Threshold	2.5		0.4	1.1	V
		3.0		0.6	1.5	
V <sub>H</sub>	Hysteresis	2.5		0.3	1.0	V
		3.0		0.4	1.2	
V <sub>OH</sub>	HIGH Level Output Voltage	2.3–3.6	$I_{OH} = -100 \mu A$	V <sub>CC</sub> - 0.2		V
		2.3	I <sub>OH</sub> = -8mA	1.8		
		2.7	$I_{OH} = -12mA$	2.2		
		3.0	$I_{OH} = -18mA$	2.4		
		3.0	$I_{OH} = -24mA$	2.2		
V <sub>OL</sub>	LOW Level Output Voltage	2.3–3.6	$I_{OL} = 100 \mu A$		0.2	V
		2.3	I <sub>OL</sub> = 8mA		0.6	
		2.7	$I_{OL} = 12mA$		0.4	
		3.0	I <sub>OL</sub> = 16mA		0.4	
		3.0	$I_{OL} = 24 \text{mA}$		0.55	
l <sub>l</sub>	Input Leakage Current	2.3–3.6	$0 \le V_I \le 5.5V$		±5.0	μA
I <sub>OFF</sub>	Power-Off Leakage Current	0	$V_{\rm I}$ or $V_{\rm O} = 5.5 V$		10	μA
I <sub>CC</sub>	Quiescent Supply Current	2.3–3.6	$V_{I} = V_{CC}$ or GND		10	μA
			$3.6V \le V_I \le 5.5V$		±10	
$\Delta I_{CC}$	Increase in I <sub>CC</sub> per Input	2.3–3.6	$V_{IH} = V_{CC} - 0.6V$		500	μA

## **AC Electrical Characteristics**

			$T_A = -40^{\circ}C$ to +85°C, $R_L = 500\Omega$					
			3V ± 0.3V, 50pF		₌ 2.7V, 50pF	V <sub>CC</sub> = 2.5 C <sub>L</sub> =	5V ± 0.2V, 30pF	
Symbol	Parameter	Min.	Max.	Min.	Max.	Min.	Max.	Units
t <sub>PHL</sub> , t <sub>PLH</sub>	Propagation Delay	1.5	6.5	1.5	7.5	1.5	7.8	ns
t <sub>OSHL</sub> , t <sub>OSLH</sub>	Output to Output Skew <sup>(4)</sup>		1.0					ns

Note:


4. Skew is defined as the absolute value of the difference between the actual propagation delay for any two separate outputs of the same device. The specification applies to any outputs switching in the same direction, either HIGH-to-LOW (t<sub>OSHL</sub>) or LOW-to-HIGH (t<sub>OSLH</sub>).


## **Dynamic Switching Characteristics**

				$T_A = 25^{\circ}C$	
Symbol	Parameter	V <sub>CC</sub> (V)	Conditions	Typical	Unit
V <sub>OLP</sub>	Quiet Output Dynamic Peak V <sub>OL</sub>	3.3	$C_L = 50 pF, V_{IH} = 3.3V, V_{IL} = 0V$	0.8	V
		2.5	$C_L = 30 pF$ , $V_{IH} = 2.5V$ , $V_{IL} = 0V$	0.6	
V <sub>OLV</sub>	Quiet Output Dynamic Valley $V_{OL}$	3.3	$C_L = 50 pF$ , $V_{IH} = 3.3V$ , $V_{IL} = 0V$	-0.8	V
		2.5	$C_{L} = 30 pF, V_{IH} = 2.5V, V_{IL} = 0V$	-0.6	

## Capacitance

Symbol	Parameter	Conditions	Typical	Units
C <sub>IN</sub>	Input Capacitance	$V_{CC} = Open, V_I = 0V \text{ or } V_{CC}$	7	pF
C <sub>OUT</sub>	Output Capacitance	$V_{CC} = 3.3 V$ , $V_I = 0 V$ or $V_{CC}$	8	pF
C <sub>PD</sub>	Power Dissipation Capacitance	$V_{CC} = 3.3V$ , $V_I = 0V$ or $V_{CC}$ , f = 10MHz	25	pF

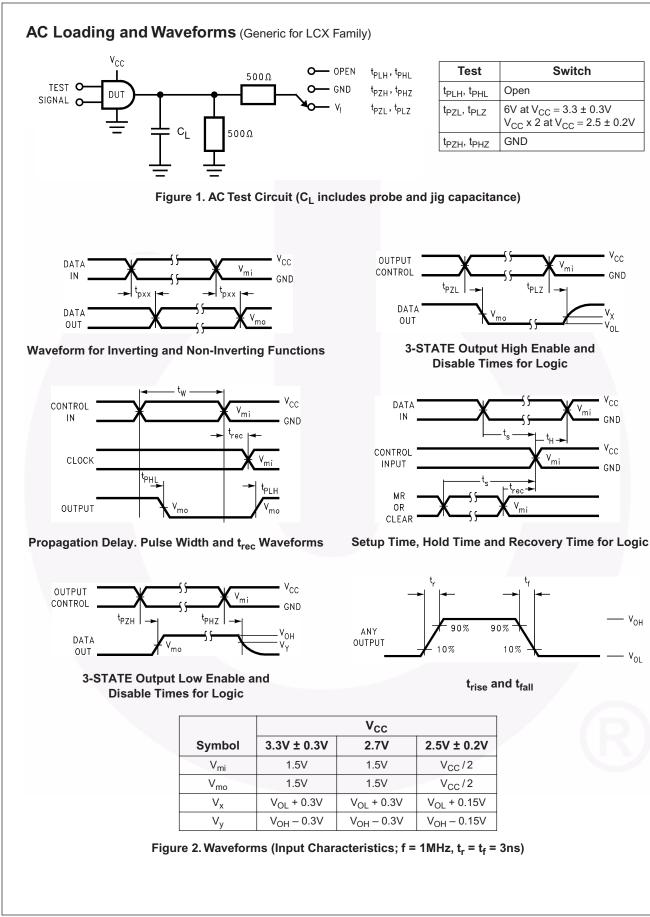

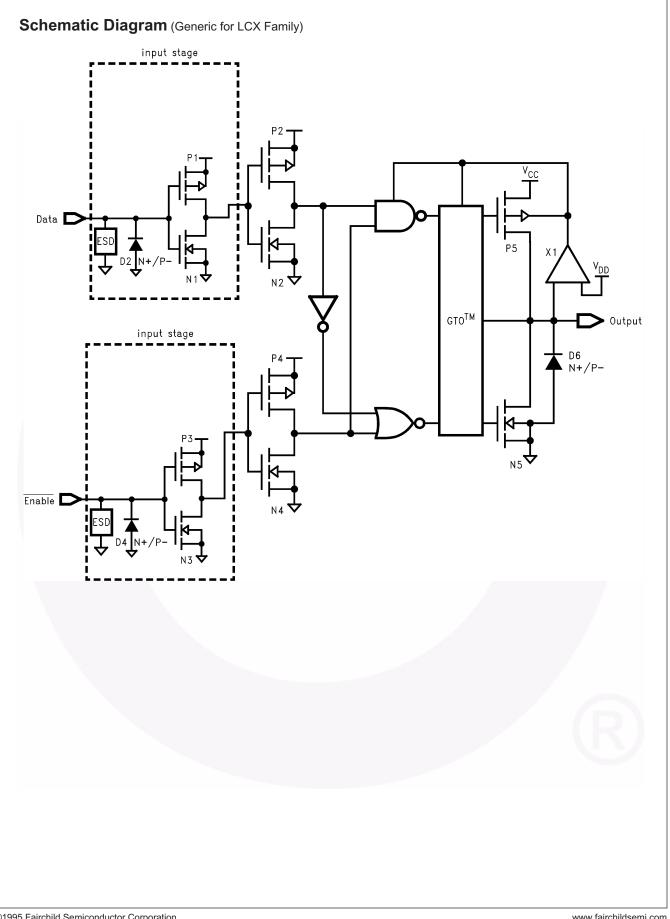


7

### Tape and Reel Specification

#### **Tape Format for DQFN**

Package Designator	Tape Section	Number of Cavities	Cavity Status	Cover Tape Status
BQX	Leader (Start End)	125 (Тур.)	Empty	Sealed
	Carrier	3000	Filled	Sealed
	Trailer (Hub End)	75 (Тур.)	Empty	Sealed


#### Tape Dimensions inches (millimeters)

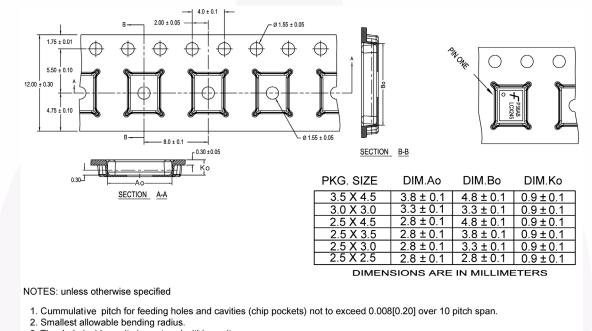


3. Thru hole inside cavity is centered within cavity.

- 4. Tolerance is  $\pm 0.002[0.05]$  for these dimensions on all 12mm tapes.
- 5. Ao and Bo measured on a plane 0.120[0.30] above the bottom of the pocket.
- 6. Ko measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
- 7. Pocket position relative to sprocket hole measured as true position of pocket. Not pocket hole.
- 8. Controlling dimension is millimeter. Diemension in inches rounded.

Reel Dimensions inches (millimeters)

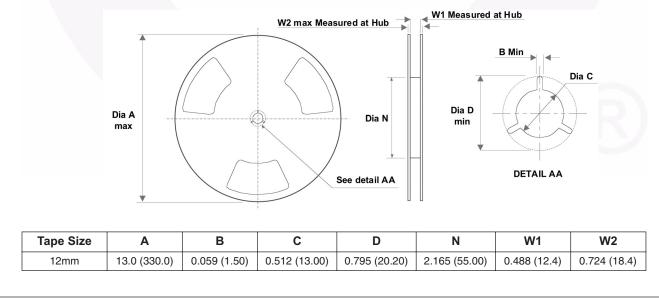


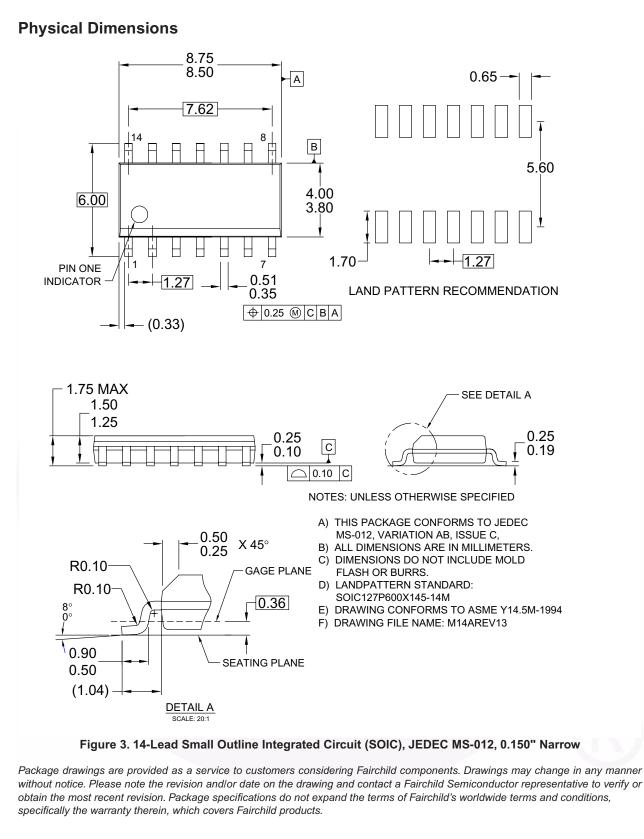


Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:

http://www.fairchildsemi.com/packaging/

74LCX14 — Low Voltage Hex Inverter with 5V Tolerant Schmitt Trigger Inputs

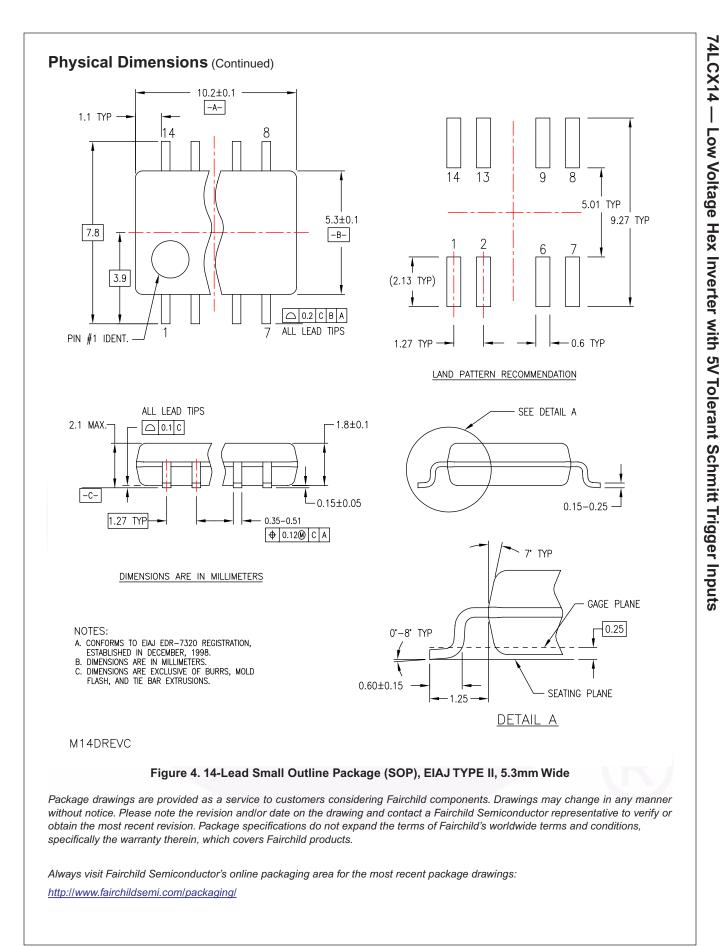

10

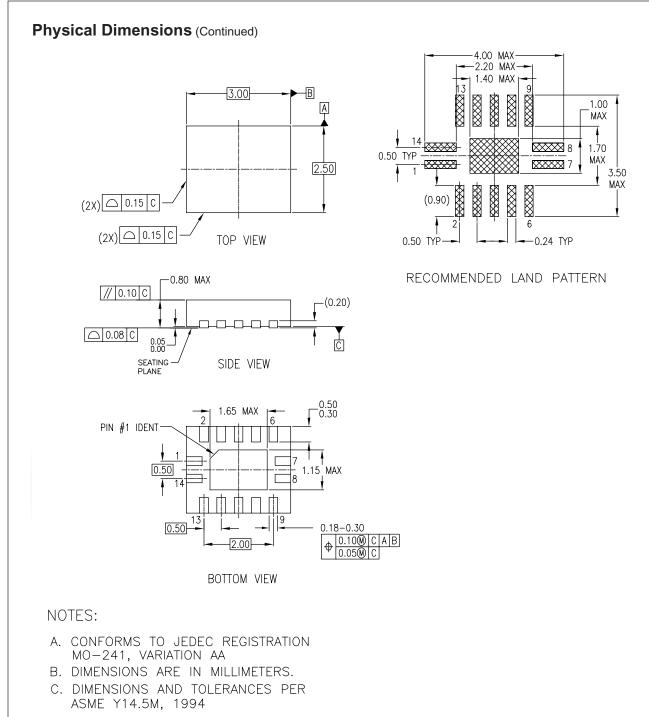

MLP14ArevA


#### Figure 5. 14-Terminal Depopulated Quad Very-Thin Flat Pack No Leads (DQFN), JEDEC MO-241, 2.5 x 3.0mm

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:

http://www.fairchildsemi.com/packaging/

74LCX14 — Low Voltage Hex Inverter with 5V Tolerant Schmitt Trigger Inputs

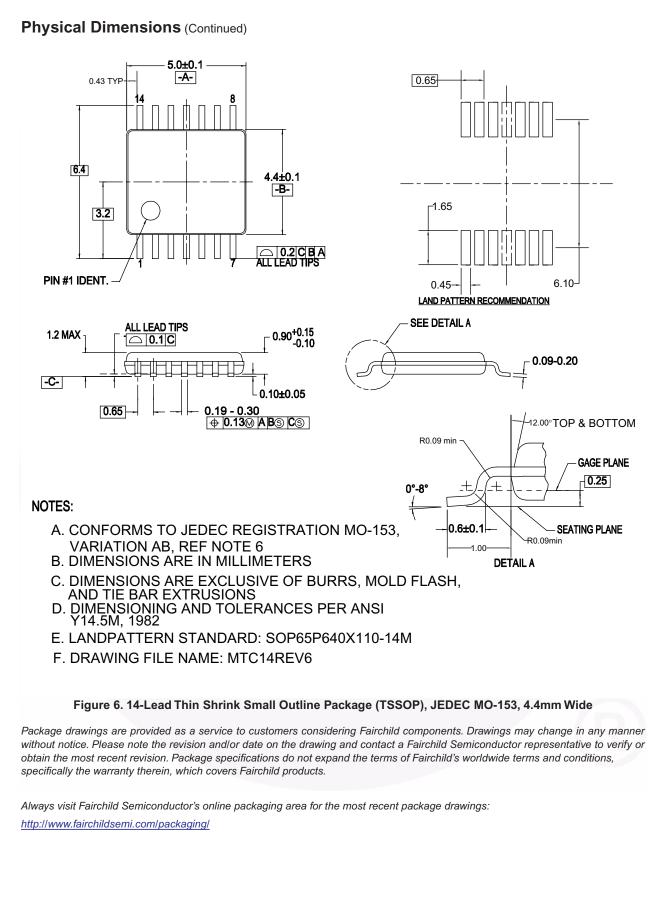



SEMICONDUCTOR

#### TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

\* EZSWITCH<sup>TM</sup> and FlashWriter<sup>®</sup> are trademarks of System General Corporation, used under license by Fairchild Semiconductor.

#### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
  - 2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild Semiconductor. The datasheet is printed for reference information only.

### PRODUCT STATUS DEFINITIONS