

特徴

- 低損失であり、高周波大電流回路に最適です。
- 周波数特性、温度特性に優れています。
- 各種スイッチング電源用。
- 照明インバーター用。
- CTVのS時補正回路用。
- ディスプレイモニタ用。

特徴

使用温度範囲	-40~+105°C
定格電圧	250V、315V、400V、450V、630V、800V、1000V、1250V、1600V. d.c
静電容量範囲	250V 0.010~10 μF (E-24) 315V 0.010~4.7 μF (E-24) 450V 0.010~3.3 μF (E-24) 400V 0.010~3.3 μF (E-24) 630V 0.010~2.2 μF (E-24) 800V 0.0010~0.68 μF (E-24) 1000V 0.0010~0.22 μF (E-24) 1250V 0.0010~0.18 μF (E-24) 1600V 0.0010~0.10 μF (E-24)
静電容量許容差	±3% (H)、±5% (J)、±10% (K) ±10% (K)は250、400、450、630Vのみ
誘電正接	0.0005以下 (at 1kHz)
耐電圧	W.V. × 150% 60sec or W.V. × 175% 1~5sec
絶縁抵抗	C ≤ 0.33 μF 30,000Ω以上 C > 0.33 μF 10,000ΩF以上 (100V. d.c./1min)
高温負荷	105°C W.V. × 125%, 1000hr印加 ΔC/C ±5%以内 tan δ 0.0008以下 IR C ≤ 0.33 μF 15,000Ω以上 C > 0.33 μF 5,000ΩF以上
耐湿負荷	85°C、85%RH W.V. × 100% 500hr印加 ΔC/C ±7%以内 tan δ 0.0008以下 IR C ≤ 0.33 μF 5,000Ω以上 C > 0.33 μF 1,500ΩF以上

形状	ストレートリード		シングルフォーミング	
	Max W	Max T	5.0Max	5.0Max
※ H寸法が20mmを超えるものは 2.0mmMax	±1.0	±0.05	±0.8	±0.8
	20mm			
Cap範囲	250V. d.c.	103~106	F= 7.5 103~913 F=10.0 103~434 F=12.5 F=17.5 F=22.5 F=27.5	104~165 474~165 474~165 185~335 365~685 755~106
	315V. d.c.	103~475	F= 7.5 103~913 F=10.0 103~304 F=12.5 334~564 F=17.5 F=22.5	104~105 334~105 624~105 115~225 245~475
400V. d.c. 450V. d.c.	103~335	F= 7.5 103~913 F=10.0 103~164 F=12.5 184~434 F=17.5 F=22.5 F=27.5	104~754 184~754 474~754 824~165 185~225 245~335	
630V. d.c.	103~225	F= 7.5 103~303 F=10.0 103~753 F=12.5 823~154 F=17.5 F=22.5 F=27.5	333~274 823~274 164~274 304~754 824~125 135~225	
800V. d.c.	102~684	F= 7.5 F=15.0 102~303 F=20.0 333~104 F=25.0 114~684	102~303 333~684	
1000V. d.c.	102~224	F= 7.5 F=15.0 102~303 F=20.0 333~104 F=25.0 114~224	102~303 333~224	
1250V. d.c.	102~184	F= 7.5 F=15.0 102~163 F=20.0 183~513 F=25.0 563~184	102~163 183~184	
1600V. d.c.	102~104	F= 7.5 F=15.0 102~912 F=20.0 103~203 F=25.0 223~104	102~912 103~104	

カタログ掲載製品の仕様、材質、その他記載内容について予告なく変更する場合がありますので、予めご了承下さい。
ご使用にあたっては、使用上の注意事項をご確認の上、技術仕様書などをお求め願ひ、仕様書の範囲内でのご使用をお願いします。

寸法(mm)

容量 記号	Cap(μF)	MPE 250V.dc						MPE 315V.dc						MPE 400/450V.dc					
		W	H	T	P	F	φd	W	H	T	P	F	φd	W	H	T	P	F	φd
103	0.010	13.0	9.0	5.5	10.0	7.5/10.0	0.6	13.0	9.0	5.5	10.0	7.5/10.0	0.6	13.0	9.0	5.5	10.0	7.5/10.0	0.6
113	0.011	13.0	9.0	5.5	10.0	7.5/10.0	0.6	13.0	9.0	5.5	10.0	7.5/10.0	0.6	13.0	9.0	5.5	10.0	7.5/10.0	0.6
123	0.012	13.0	9.0	5.5	10.0	7.5/10.0	0.6	13.0	9.0	5.5	10.0	7.5/10.0	0.6	13.0	9.0	5.5	10.0	7.5/10.0	0.6
133	0.013	13.0	9.5	5.5	10.0	7.5/10.0	0.6	13.0	9.5	5.5	10.0	7.5/10.0	0.6	13.0	9.5	5.5	10.0	7.5/10.0	0.6
153	0.015	13.0	9.5	6.0	10.0	7.5/10.0	0.6	13.0	9.5	6.0	10.0	7.5/10.0	0.6	13.0	9.5	6.0	10.0	7.5/10.0	0.6
163	0.016	13.0	9.5	6.0	10.0	7.5/10.0	0.6	13.0	9.5	6.0	10.0	7.5/10.0	0.6	13.0	9.5	6.0	10.0	7.5/10.0	0.6
183	0.018	13.0	10.0	6.0	10.0	7.5/10.0	0.6	13.0	10.0	6.0	10.0	7.5/10.0	0.6	13.0	10.0	6.0	10.0	7.5/10.0	0.6
203	0.020	13.0	10.0	6.5	10.0	7.5/10.0	0.6	13.0	10.0	6.5	10.0	7.5/10.0	0.6	13.0	10.0	6.5	10.0	7.5/10.0	0.6
223	0.022	13.0	10.5	6.5	10.0	7.5/10.0	0.6	13.0	10.5	6.5	10.0	7.5/10.0	0.6	13.0	10.5	6.5	10.0	7.5/10.0	0.6
243	0.024	13.0	10.5	7.0	10.0	7.5/10.0	0.6	13.0	10.5	7.0	10.0	7.5/10.0	0.6	13.0	10.5	7.0	10.0	7.5/10.0	0.6
273	0.027	13.0	10.5	7.0	10.0	7.5/10.0	0.6	13.0	10.5	7.0	10.0	7.5/10.0	0.6	13.0	10.5	7.0	10.0	7.5/10.0	0.6
303	0.030	13.0	11.0	7.5	10.0	7.5/10.0	0.6	13.0	11.0	7.5	10.0	7.5/10.0	0.6	13.0	11.0	7.5	10.0	7.5/10.0	0.6
333	0.033	13.0	9.0	5.5	10.0	7.5/10.0	0.6	13.0	9.0	5.5	10.0	7.5/10.0	0.6	13.0	9.0	5.5	10.0	7.5/10.0	0.6
363	0.036	13.0	9.5	5.5	10.0	7.5/10.0	0.6	13.0	9.5	5.5	10.0	7.5/10.0	0.6	13.0	9.5	5.5	10.0	7.5/10.0	0.6
393	0.039	13.0	9.5	6.0	10.0	7.5/10.0	0.6	13.0	9.5	6.0	10.0	7.5/10.0	0.6	13.0	9.5	6.0	10.0	7.5/10.0	0.6
433	0.043	13.0	9.5	6.0	10.0	7.5/10.0	0.6	13.0	9.5	6.0	10.0	7.5/10.0	0.6	13.0	9.5	6.0	10.0	7.5/10.0	0.6
473	0.047	13.0	10.0	6.0	10.0	7.5/10.0	0.6	13.0	10.0	6.0	10.0	7.5/10.0	0.6	13.0	10.0	6.0	10.0	7.5/10.0	0.6
513	0.051	13.0	10.0	6.5	10.0	7.5/10.0	0.6	13.0	10.0	6.5	10.0	7.5/10.0	0.6	13.0	10.0	6.5	10.0	7.5/10.0	0.6
563	0.056	13.0	10.0	6.5	10.0	7.5/10.0	0.6	13.0	10.0	6.5	10.0	7.5/10.0	0.6	13.0	10.0	6.5	10.0	7.5/10.0	0.6
623	0.062	13.0	10.5	6.5	10.0	7.5/10.0	0.6	13.0	10.5	6.5	10.0	7.5/10.0	0.6	13.0	10.5	6.5	10.0	7.5/10.0	0.6
683	0.068	13.0	10.5	7.0	10.0	7.5/10.0	0.6	13.0	10.5	7.0	10.0	7.5/10.0	0.6	13.0	10.5	7.0	10.0	7.5/10.0	0.6
753	0.075	13.0	11.0	7.0	10.0	7.5/10.0	0.6	13.0	11.0	7.0	10.0	7.5/10.0	0.6	13.0	11.0	7.0	10.0	7.5/10.0	0.6
823	0.082	13.0	11.0	7.5	10.0	7.5/10.0	0.6	13.0	11.0	7.5	10.0	7.5/10.0	0.6	13.0	11.0	7.5	10.0	7.5/10.0	0.6
913	0.091	13.0	11.5	7.5	10.0	7.5/10.0	0.6	13.0	11.5	7.5	10.0	7.5/10.0	0.6	13.0	11.5	7.5	10.0	7.5/10.0	0.6
104	0.10	15.5	12.0	6.5	12.5	7.5/10.0	0.6	15.5	12.0	6.5	12.5	7.5/10.0	0.6	15.5	12.0	6.5	12.5	7.5/10.0	0.6
114	0.11	15.5	12.0	7.0	12.5	7.5/10.0	0.6	15.5	12.0	7.0	12.5	7.5/10.0	0.6	15.5	12.0	7.0	12.5	7.5/10.0	0.6
124	0.12	15.5	12.5	7.0	12.5	7.5/10.0	0.6	15.5	12.5	7.0	12.5	7.5/10.0	0.6	15.5	12.5	7.0	12.5	7.5/10.0	0.6
134	0.13	15.5	12.5	7.5	12.5	7.5/10.0	0.6	15.5	12.5	7.5	12.5	7.5/10.0	0.6	15.5	12.5	7.5	12.5	7.5/10.0	0.6
154	0.15	15.5	13.0	7.5	12.5	7.5/10.0	0.6	15.5	13.0	7.5	12.5	7.5/10.0	0.6	15.5	13.0	7.5	12.5	7.5/10.0	0.6
164	0.16	15.5	13.0	8.0	12.5	7.5/10.0	0.6	15.5	13.0	8.0	12.5	7.5/10.0	0.6	15.5	13.0	8.0	12.5	7.5/10.0	0.6
184	0.18	15.5	11.5	6.0	12.5	7.5/10.0	0.6	15.5	12.5	7.0	12.5	7.5/10.0	0.6	18.5	13.5	7.0	15.0	7.5/10.0/12.5	0.8
204	0.20	15.5	11.5	6.5	12.5	7.5/10.0	0.6	15.5	12.5	7.5	12.5	7.5/10.0	0.6	18.5	14.0	7.0	15.0	7.5/10.0/12.5	0.8
224	0.22	15.5	12.0	6.5	12.5	7.5/10.0	0.6	15.5	13.0	8.0	12.5	7.5/10.0	0.6	18.5	14.0	7.5	15.0	7.5/10.0/12.5	0.8
244	0.24	15.5	12.0	7.0	12.5	7.5/10.0	0.6	15.5	12.5	8.5	12.5	7.5/10.0	0.6	18.5	14.5	7.5	15.0	7.5/10.0/12.5	0.8
274	0.27	15.5	12.5	7.0	12.5	7.5/10.0	0.6	15.5	13.0	9.0	12.5	7.5/10.0	0.6	18.5	15.0	8.0	15.0	7.5/10.0/12.5	0.8
304	0.30	15.5	12.5	7.5	12.5	7.5/10.0	0.6	15.5	13.0	9.5	12.5	7.5/10.0	0.6	18.5	15.0	8.5	15.0	7.5/10.0/12.5	0.8
334	0.33	15.5	13.0	7.5	12.5	7.5/10.0	0.6	18.5	13.5	8.0	15.0	7.5/10.0/12.5	0.8	18.5	15.5	9.0	15.0	7.5/10.0/12.5	0.8
364	0.36	15.5	12.0	8.5	12.5	7.5/10.0	0.6	18.5	13.5	8.5	15.0	7.5/10.0/12.5	0.8	18.5	16.0	9.0	15.0	7.5/10.0/12.5	0.8
394	0.39	15.5	12.5	9.0	12.5	7.5/10.0	0.6	18.5	14.0	8.5	15.0	7.5/10.0/12.5	0.8	18.5	15.5	10.0	15.0	7.5/10.0/12.5	0.8
434	0.43	15.5	13.0	9.0	12.5	7.5/10.0	0.8	18.5	14.0	9.0	15.0	7.5/10.0/12.5	0.8	18.5	16.0	10.5	15.0	7.5/10.0/12.5	0.8
474	0.47	20.5	13.5	7.0	17.5	7.5/10.0/12.5	0.8	18.5	15.5	8.5	15.0	7.5/10.0/12.5	0.8	20.5	16.5	9.5	17.5	7.5/10.0/12.5	0.8
514	0.51	20.5	14.0	7.0	17.5	7.5/10.0/12.5	0.8	18.5	16.0	9.0	15.0	7.5/10.0/12.5	0.8	20.5	16.5	10.0	17.5	7.5/10.0/12.5	0.8
564	0.56	20.5	14.0	7.5	17.5	7.5/10.0/12.5	0.8	18.5	16.0	9.5	15.0	7.5/10.0/12.5	0.8	20.5	17.0	10.5	17.5	7.5/10.0/12.5	0.8
624	0.62	20.5	14.5	7.5	17.5	7.5/10.0/12.5	0.8	20.5	16.0	9.0	17.5	7.5/10.0/12.5	0.8	20.5	17.5	11.0	17.5	7.5/10.0/12.5	0.8
684	0.68	20.5	14.5	8.0	17.5	7.5/10.0/12.5	0.8	20.5	16.5	9.5	17.5	7.5/10.0/12.5	0.8	20.5	17.5	12.0	17.5	7.5/10.0/12.5	0.8
754	0.75	20.5	15.0	8.0	17.5	7.5/10.0/12.5	0.8	20.5	17.0	10.0	17.5	7.5/10.0/12.5	0.8	20.5	18.0	12.5	17.5	7.5/10.0/12.5	0.8
824	0.82	20.5	15.5	8.5	17.5	7.5/10.0/12.5	0.8	20.5	17.0	10.5	17.5	7.5/10.0/12.5	0.8	25.5	18.5	10.0	22.5	17.5	0.8
914	0.91	20.5	15.5	9.0	17.5	7.5/10.0/12.5	0.8	20.5	17.5	11.0	17.5	7.5/10.0/12.5	0.8	25.5	19.0	10.5	22.5	17.5	0.8
105	1.0	20.5	16.0	9.5	17.5	7.5/10.0/12.5	0.8	20.5	18.0	11.5	17.5	7.5/10.0/12.5	0.8	25.5	19.5	11.0	22.5	17.5	0.8
115	1.1	20.5	16.5	9.5	17.5	7.5/10.0/12.5	0.8	25.5	18.0	9.5	22.5	17.5	0.8	25.5	20.0	11.5	22.5	17.5	0.8
125	1.2	20.5	17.0	10.0	17.5	7.5/10.0/12.5	0.8	25.5	18.5	10.0	22.5	17.5	0.8	25.5	20.5	12.0	22.5	17.5	0.8
135	1.3	20.5	17.5	10.5	17.5	7.5/10.0/12.5	0.8	25.5	19.0	10.5	22.5	17.5	0.8	25.5	21.0	12.5	22.5	17.5	0.8
155	1.5	20.5	18.0	11.0	17.5	7.5/10.0/12.5	0.8	25.5	19.5	11.5	22.5	17.5	0.8	25.5	22.0	13.5	22.5	17.5	0.8
165	1.6	20.5	18.5	11.5	17.5	7.5/10.0/12.5	0.8	25.5	20.0	11.5	22.5	17.5	0.8	25.5	22.5	14.0	22.5	17.5	0.8
185	1.8	25.5	19.5	9.5	22.5	17.5	0.8	25.5	20.5	12.5	22.5	17.5	0.8	31.0	23.0	13.0	27.5	22.5	0.8
205	2.0	25.5	20.0	10.0	22.5	17.5	0.8	25.5	21.5	13.0	22.5	17.5	0.8	31.0	23.5	13.5	27.5	22.5	0.8
225	2.2	25.5	20.5	10.5	22.5	17.5	0.8	25.5	23.0	13.0	22.5	17.5	0.8	31.0	24.5	14.5	27.5	22.5	0.8
245	2.4	25.5	21.0	11.0	22.5	17.5	0.8	31.0	22.5	12.5	27.5	22.5	0.8	37.0	23.5	13.5	32.5	27.5	0.8
275	2.7	25.5	21.5	11.5	22.5	17.5	0.8	31.0	23.0	13.5	27.5	22.5	0.8	37.0	24.0	14.0	32.5	27.5	0.8
305	3.0	25.5	22.0	12.0	22.5	17.5	0.8	31.0	24.0	14.0	27.5	22.5	0.8	37.0	25.0	15.0	32.5	27.5	0.8
335	3.3	25.5	22.5	12.5	22.5	17.5	0.8	31.0	24.5	14.5	27.5	22.5	0.8	37.0	25.0	16.5	32.5	27.5	0.8
365	3.6	31.0	22.0	12.5	27.5	22.5	0.8	31.0	25.5	15.5	27.5	22.5	0.8						
395	3.9	31.0	22.5	13.0	27.5	22.5	0.8	31.0	26.0	16.0	27.5	22.5	0.8						
4																			

寸法(mm)

容量 記号	Cap(μF)	MPE 630V.dc						MPE 800V.dc					
		W	H	T	P	F	φd	W	H	T	P	F	φd
102	0.0010							18.5	9.0	5.5	15.0	7.5/15.0	0.6
112	0.0011							18.5	9.5	6.0	15.0	7.5/15.0	0.6
122	0.0012							18.5	9.5	6.0	15.0	7.5/15.0	0.6
132	0.0013							18.5	9.5	6.0	15.0	7.5/15.0	0.6
152	0.0015							18.5	10.0	6.5	15.0	7.5/15.0	0.6
162	0.0016							18.5	10.0	6.5	15.0	7.5/15.0	0.6
182	0.0018							18.5	10.5	7.0	15.0	7.5/15.0	0.6
202	0.0020							18.5	10.5	7.0	15.0	7.5/15.0	0.6
222	0.0022							18.5	11.0	7.5	15.0	7.5/15.0	0.6
242	0.0024							18.5	11.0	7.5	15.0	7.5/15.0	0.6
272	0.0027							18.5	9.0	5.5	15.0	7.5/15.0	0.6
302	0.0030							18.5	9.5	5.5	15.0	7.5/15.0	0.6
332	0.0033							18.5	9.5	6.0	15.0	7.5/15.0	0.6
362	0.0036							18.5	9.5	6.0	15.0	7.5/15.0	0.6
392	0.0039							18.5	9.5	6.0	15.0	7.5/15.0	0.6
432	0.0043							18.5	11.0	6.0	15.0	7.5/15.0	0.6
472	0.0047							18.5	11.0	6.0	15.0	7.5/15.0	0.6
512	0.0051							18.5	11.5	6.0	15.0	7.5/15.0	0.6
562	0.0056							18.5	9.5	6.0	15.0	7.5/15.0	0.6
622	0.0062							18.5	9.5	6.0	15.0	7.5/15.0	0.6
682	0.0068							18.5	10.0	6.0	15.0	7.5/15.0	0.6
752	0.0075							18.5	11.0	6.0	15.0	7.5/15.0	0.6
822	0.0082							18.5	9.0	5.5	15.0	7.5/15.0	0.6
912	0.0091							18.5	9.5	6.0	15.0	7.5/15.0	0.6
103	0.010	13.0	9.0	5.5	10.0	7.5/10.0	0.6	18.5	9.5	6.0	15.0	7.5/15.0	0.6
113	0.011	13.0	9.0	5.5	10.0	7.5/10.0	0.6	18.5	9.5	6.0	15.0	7.5/15.0	0.6
123	0.012	13.0	9.0	5.5	10.0	7.5/10.0	0.6	18.5	11.0	6.0	15.0	7.5/15.0	0.6
133	0.013	13.0	9.5	5.5	10.0	7.5/10.0	0.6	18.5	11.0	6.0	15.0	7.5/15.0	0.6
153	0.015	13.0	9.5	6.0	10.0	7.5/10.0	0.6	18.5	9.5	6.0	15.0	7.5/15.0	0.6
163	0.016	13.0	9.5	6.0	10.0	7.5/10.0	0.6	18.5	10.0	6.0	15.0	7.5/15.0	0.6
183	0.018	13.0	10.0	6.0	10.0	7.5/10.0	0.6	18.5	11.0	6.0	15.0	7.5/15.0	0.6
203	0.020	13.0	10.0	6.5	10.0	7.5/10.0	0.6	18.5	11.0	6.0	15.0	7.5/15.0	0.8
223	0.022	13.0	10.5	6.5	10.0	7.5/10.0	0.6	18.5	11.5	6.0	15.0	7.5/15.0	0.8
243	0.024	13.0	10.5	7.0	10.0	7.5/10.0	0.6	18.5	12.5	6.5	15.0	7.5/15.0	0.8
273	0.027	13.0	10.5	7.0	10.0	7.5/10.0	0.6	18.5	12.5	7.0	15.0	7.5/15.0	0.8
303	0.030	13.0	11.0	7.5	10.0	7.5/10.0	0.6	18.5	12.5	7.0	15.0	7.5/15.0	0.8
333	0.033	15.5	11.5	6.5	12.5	7.5/10.0	0.6	23.5	11.5	6.5	20.0	15.0/20.0	0.8
363	0.036	15.5	11.5	6.5	12.5	7.5/10.0	0.6	23.5	12.0	6.5	20.0	15.0/20.0	0.8
393	0.039	15.5	12.0	6.5	12.5	7.5/10.0	0.6	23.5	12.0	7.0	20.0	15.0/20.0	0.8
433	0.043	15.5	12.0	7.0	12.5	7.5/10.0	0.6	23.5	12.5	7.0	20.0	15.0/20.0	0.8
473	0.047	15.5	12.5	7.0	12.5	7.5/10.0	0.6	23.5	12.5	7.5	20.0	15.0/20.0	0.8
513	0.051	15.5	12.5	7.5	12.5	7.5/10.0	0.6	23.5	13.0	7.5	20.0	15.0/20.0	0.8
563	0.056	15.5	13.0	7.5	12.5	7.5/10.0	0.6	23.5	14.0	7.5	20.0	15.0/20.0	0.8
623	0.062	15.5	13.0	8.0	12.5	7.5/10.0	0.6	23.5	14.5	7.5	20.0	15.0/20.0	0.8
683	0.068	15.5	12.5	9.0	12.5	7.5/10.0	0.6	23.5	17.0	7.0	20.0	15.0/20.0	0.8
753	0.075	15.5	13.0	9.0	12.5	7.5/10.0	0.6	23.5	17.5	7.5	20.0	15.0/20.0	0.8
823	0.082	18.5	14.0	7.0	15.0	7.5/10.0/12.5	0.8	23.5	17.5	7.5	20.0	15.0/20.0	0.8
913	0.091	18.5	14.5	7.5	15.0	7.5/10.0/12.5	0.8	23.5	18.0	8.0	20.0	15.0/20.0	0.8
104	0.10	18.5	14.5	8.0	15.0	7.5/10.0/12.5	0.8	23.5	18.5	8.5	20.0	15.0/20.0	0.8
114	0.11	18.5	15.0	8.0	15.0	7.5/10.0/12.5	0.8	28.5	17.5	7.5	25.0	15.0/25.0	0.8
124	0.12	18.5	15.0	8.5	15.0	7.5/10.0/12.5	0.8	28.5	17.5	7.5	25.0	15.0/25.0	0.8
134	0.13	18.5	15.5	8.5	15.0	7.5/10.0/12.5	0.8	28.5	18.0	8.0	25.0	15.0/25.0	0.8
154	0.15	18.5	16.0	9.5	15.0	7.5/10.0/12.5	0.8	28.5	18.5	8.5	25.0	15.0/25.0	0.8
164	0.16	20.5	15.5	9.0	17.5	7.5/10.0/12.5	0.8	28.5	20.0	8.5	25.0	15.0/25.0	0.8
184	0.18	20.5	16.0	9.5	17.5	7.5/10.0/12.5	0.8	28.5	20.5	9.0	25.0	15.0/25.0	0.8
204	0.20	20.5	16.5	9.5	17.5	7.5/10.0/12.5	0.8	28.5	21.0	9.5	25.0	15.0/25.0	0.8
224	0.22	20.5	17.0	10.0	17.5	7.5/10.0/12.5	0.8	28.5	21.5	10.0	25.0	15.0/25.0	0.8
244	0.24	20.5	17.5	10.5	17.5	7.5/10.0/12.5	0.8	28.5	21.5	10.0	25.0	15.0/25.0	0.8
274	0.27	20.5	18.0	11.0	17.5	7.5/10.0/12.5	0.8	28.5	22.5	11.0	25.0	15.0/25.0	0.8
304	0.30	25.5	18.0	9.5	22.5	17.5	0.8	28.5	23.0	11.5	25.0	15.0/25.0	0.8
334	0.33	25.5	18.5	10.0	22.5	17.5	0.8	28.5	23.5	12.0	25.0	15.0/25.0	0.8
364	0.36	25.5	18.5	10.5	22.5	17.5	0.8	28.5	24.0	12.5	25.0	15.0/25.0	0.8
394	0.39	25.5	19.0	10.5	22.5	17.5	0.8	28.5	23.5	13.5	25.0	15.0/25.0	0.8
434	0.43	25.5	19.5	11.0	22.5	17.5	0.8	28.5	24.0	14.0	25.0	15.0/25.0	0.8
474	0.47	25.5	20.0	11.5	22.5	17.5	0.8	28.5	25.0	15.0	25.0	15.0/25.0	0.8
514	0.51	25.5	20.5	12.0	22.5	17.5	0.8	28.5	25.5	16.0	25.0	15.0/25.0	0.8
564	0.56	25.5	21.0	13.0	22.5	17.5	0.8	28.5	25.5	17.5	25.0	15.0/25.0	0.8
624	0.62	25.5	22.0	13.5	22.5	17.5	0.8	28.5	26.5	18.0	25.0	15.0/25.0	0.8
684	0.68	25.5	22.5	14.0	22.5	17.5	0.8	28.5	27.5	19.0	25.0	15.0/25.0	0.8
754	0.75	25.5	23.0	15.0	22.5	17.5	0.8						
824	0.82	31.0	23.5	13.5	27.5	22.5	0.8						
914	0.91	31.0	24.0	14.0	27.5	22.5	0.8						
105	1.0	31.0	25.0	15.0	27.5	22.5	0.8						
115	1.1	31.0	25.5	15.5	27.5	22.5	0.8						
125	1.2	31.0	26.0	16.5	27.5	22.5	0.8						
135	1.3	37.0	24.0	16.0	32.5	27.5	0.8						
155	1.5	37.0	25.5	17.0	32.5	27.5	0.8						
165	1.6	37.0	26.0	17.5	32.5	27.5	0.8						
185	1.8	37.0	26.0	19.5	32.5	27.5	0.8						
205	2.0	37.0	27.0	20.5	32.5	27.5	0.8						
225	2.2	37.0	28.0	21.0	32.5	27.5	0.8						









カタログ掲載製品の仕様、材質、その他記載内容について予告なく変更する場合がありますので、予めご了承下さい。
ご使用にあたっては、使用上の注意事項をご確認の上、技術仕様書などをお求め願ひ、仕様書の範囲内でのご使用をお願いします。

寸法(mm)

容量 記号	Cap(μF)	MPE 1000V.dc						MPE 1250V.dc						MPE 1600V.dc					
		W	H	T	P	F	φd	W	H	T	P	F	φd	W	H	T	P	F	φd
102	0.0010	18.5	9.0	5.5	15.0	7.5/15.0	0.6	18.5	9.0	5.5	15.0	7.5/15.0	0.6	18.5	9.0	5.5	15.0	7.5/15.0	0.6
112	0.0011	18.5	9.5	6.0	15.0	7.5/15.0	0.6	18.5	9.5	6.0	15.0	7.5/15.0	0.6	18.5	9.5	6.0	15.0	7.5/15.0	0.6
122	0.0012	18.5	9.5	6.0	15.0	7.5/15.0	0.6	18.5	9.5	6.0	15.0	7.5/15.0	0.6	18.5	9.5	6.0	15.0	7.5/15.0	0.6
132	0.0013	18.5	9.5	6.0	15.0	7.5/15.0	0.6	18.5	9.5	6.0	15.0	7.5/15.0	0.6	18.5	9.5	6.0	15.0	7.5/15.0	0.6
152	0.0015	18.5	10.0	6.5	15.0	7.5/15.0	0.6	18.5	10.0	6.5	15.0	7.5/15.0	0.6	18.5	10.0	6.5	15.0	7.5/15.0	0.6
162	0.0016	18.5	10.0	6.5	15.0	7.5/15.0	0.6	18.5	10.0	6.5	15.0	7.5/15.0	0.6	18.5	10.0	6.5	15.0	7.5/15.0	0.6
182	0.0018	18.5	10.5	7.0	15.0	7.5/15.0	0.6	18.5	10.5	7.0	15.0	7.5/15.0	0.6	18.5	10.5	7.0	15.0	7.5/15.0	0.6
202	0.0020	18.5	10.5	7.0	15.0	7.5/15.0	0.6	18.5	10.5	7.0	15.0	7.5/15.0	0.6	18.5	10.5	7.0	15.0	7.5/15.0	0.6
222	0.0022	18.5	11.0	7.5	15.0	7.5/15.0	0.6	18.5	11.0	7.5	15.0	7.5/15.0	0.6	18.5	11.0	7.5	15.0	7.5/15.0	0.6
242	0.0024	18.5	11.0	7.5	15.0	7.5/15.0	0.6	18.5	11.0	7.5	15.0	7.5/15.0	0.6	18.5	11.0	7.5	15.0	7.5/15.0	0.6
272	0.0027	18.5	9.0	5.5	15.0	7.5/15.0	0.6	18.5	9.0	5.5	15.0	7.5/15.0	0.6	18.5	9.0	5.5	15.0	7.5/15.0	0.6
302	0.0030	18.5	9.5	5.5	15.0	7.5/15.0	0.6	18.5	9.5	5.5	15.0	7.5/15.0	0.6	18.5	9.5	5.5	15.0	7.5/15.0	0.6
332	0.0033	18.5	9.5	6.0	15.0	7.5/15.0	0.6	18.5	9.5	6.0	15.0	7.5/15.0	0.6	18.5	9.5	6.0	15.0	7.5/15.0	0.6
362	0.0036	18.5	9.5	6.0	15.0	7.5/15.0	0.6	18.5	9.5	6.0	15.0	7.5/15.0	0.6	18.5	9.5	6.0	15.0	7.5/15.0	0.6
392	0.0039	18.5	9.5	6.0	15.0	7.5/15.0	0.6	18.5	9.5	6.0	15.0	7.5/15.0	0.6	18.5	11.0	6.0	15.0	7.5/15.0	0.6
432	0.0043	18.5	11.0	6.0	15.0	7.5/15.0	0.6	18.5	11.0	6.0	15.0	7.5/15.0	0.6	18.5	11.0	6.0	15.0	7.5/15.0	0.6
472	0.0047	18.5	11.0	6.0	15.0	7.5/15.0	0.6	18.5	11.0	6.0	15.0	7.5/15.0	0.6	18.5	11.0	6.0	15.0	7.5/15.0	0.6
512	0.0051	18.5	11.5	6.0	15.0	7.5/15.0	0.6	18.5	11.5	6.0	15.0	7.5/15.0	0.6	18.5	11.5	6.0	15.0	7.5/15.0	0.8
562	0.0056	18.5	9.5	6.0	15.0	7.5/15.0	0.6	18.5	9.5	6.0	15.0	7.5/15.0	0.6	18.5	11.5	6.5	15.0	7.5/15.0	0.8
622	0.0062	18.5	9.5	6.0	15.0	7.5/15.0	0.6	18.5	9.5	6.0	15.0	7.5/15.0	0.6	18.5	12.0	6.5	15.0	7.5/15.0	0.8
682	0.0068	18.5	10.0	6.0	15.0	7.5/15.0	0.6	18.5	10.0	6.0	15.0	7.5/15.0	0.6	18.5	12.0	7.0	15.0	7.5/15.0	0.8
752	0.0075	18.5	11.0	6.0	15.0	7.5/15.0	0.6	18.5	11.0	6.0	15.0	7.5/15.0	0.6	18.5	12.5	7.0	15.0	7.5/15.0	0.8
822	0.0082	18.5	9.0	5.5	15.0	7.5/15.0	0.6	18.5	11.0	6.0	15.0	7.5/15.0	0.6	18.5	12.5	7.5	15.0	7.5/15.0	0.8
912	0.0091	18.5	9.5	6.0	15.0	7.5/15.0	0.6	18.5	11.5	6.5	15.0	7.5/15.0	0.8	18.5	13.0	7.5	15.0	7.5/15.0	0.8
103	0.010	18.5	9.5	6.0	15.0	7.5/15.0	0.6	18.5	11.5	6.5	15.0	7.5/15.0	0.8	23.5	12.5	7.5	20.0	15.0/20.0	0.8
113	0.011	18.5	9.5	6.0	15.0	7.5/15.0	0.6	18.5	12.0	6.5	15.0	7.5/15.0	0.8	23.5	13.0	7.5	20.0	15.0/20.0	0.8
123	0.012	18.5	11.0	6.0	15.0	7.5/15.0	0.6	18.5	12.0	7.0	15.0	7.5/15.0	0.8	23.5	13.0	8.0	20.0	15.0/20.0	0.8
133	0.013	18.5	11.0	6.0	15.0	7.5/15.0	0.6	18.5	12.5	7.0	15.0	7.5/15.0	0.8	23.5	13.5	8.0	20.0	15.0/20.0	0.8
153	0.015	18.5	11.5	6.0	15.0	7.5/15.0	0.8	18.5	13.0	7.0	15.0	7.5/15.0	0.8	23.5	15.0	8.0	20.0	15.0/20.0	0.8
163	0.016	18.5	11.5	6.5	15.0	7.5/15.0	0.8	18.5	13.0	8.0	20.0	7.5/16.0	0.8	23.5	15.0	8.5	20.0	15.0/20.0	0.8
183	0.018	18.5	12.0	6.5	15.0	7.5/15.0	0.8	23.5	12.0	7.0	20.0	7.5/15.0	0.8	23.5	16.5	8.0	20.0	15.0/20.0	0.8
203	0.020	18.5	12.0	7.0	15.0	7.5/15.0	0.8	23.5	12.5	7.5	20.0	15.0/20.0	0.8	23.5	17.0	8.5	20.0	15.0/20.0	0.8
223	0.022	18.5	12.5	7.0	15.0	7.5/15.0	0.8	23.5	13.0	7.5	20.0	15.0/20.0	0.8	28.5	15.0	8.0	25.0	15.0/25.0	0.8
243	0.024	18.5	12.5	7.5	15.0	7.5/15.0	0.8	23.5	13.0	8.0	20.0	15.0/20.0	0.8	28.5	15.5	8.5	25.0	15.0/25.0	0.8
273	0.027	18.5	13.0	8.0	15.0	7.5/15.0	0.8	23.5	15.5	7.0	20.0	15.0/20.0	0.8	28.5	17.0	8.5	25.0	15.0/25.0	0.8
303	0.030	18.5	13.5	8.0	15.0	7.5/15.0	0.8	23.5	16.0	7.5	20.0	15.0/20.0	0.8	28.5	18.5	8.5	25.0	15.0/25.0	0.8
333	0.033	23.5	12.5	7.0	20.0	15.0/20.0	0.8	23.5	16.0	8.0	20.0	15.0/20.0	0.8	28.5	20.0	8.5	25.0	15.0/25.0	0.8
363	0.036	23.5	12.5	7.5	20.0	15.0/20.0	0.8	23.5	16.5	8.0	20.0	15.0/20.0	0.8	28.5	20.0	8.5	25.0	15.0/25.0	0.8
393	0.039	23.5	13.0	7.5	20.0	15.0/20.0	0.8	23.5	16.5	8.5	20.0	15.0/20.0	0.8	28.5	21.5	8.5	25.0	15.0/25.0	0.8
433	0.043	23.5	14.5	7.5	20.0	15.0/20.0	0.8	23.5	19.5	8.0	20.0	15.0/20.0	0.8	28.5	22.0	9.0	25.0	15.0/25.0	0.8
473	0.047	23.5	14.5	7.5	20.0	15.0/20.0	0.8	23.5	19.5	8.0	20.0	15.0/20.0	0.8	28.5	22.5	9.5	25.0	15.0/25.0	0.8
513	0.051	23.5	16.0	7.5	20.0	15.0/20.0	0.8	23.5	20.0	8.5	20.0	15.0/20.0	0.8	28.5	23.0	10.0	25.0	15.0/25.0	0.8
563	0.056	23.5	16.0	8.0	20.0	15.0/20.0	0.8	28.5	19.0	7.5	25.0	15.0/25.0	0.8	28.5	23.5	10.0	25.0	15.0/25.0	0.8
623	0.062	23.5	16.5	8.0	20.0	15.0/20.0	0.8	28.5	19.5	8.0	25.0	15.0/25.0	0.8	28.5	24.0	11.0	25.0	15.0/25.0	0.8
683	0.068	23.5	18.0	8.0	20.0	15.0/20.0	0.8	28.5	21.0	8.0	25.0	15.0/25.0	0.8	28.5	24.5	11.5	25.0	15.0/25.0	0.8
753	0.075	23.5	18.5	8.5	20.0	15.0/20.0	0.8	28.5	21.5	8.0	25.0	15.0/25.0	0.8	28.5	25.0	12.0	25.0	15.0/25.0	0.8
823	0.082	23.5	18.5	9.0	20.0	15.0/20.0	0.8	28.5	21.5	8.5	25.0	15.0/25.0	0.8	28.5	25.5	12.5	25.0	15.0/25.0	0.8
913	0.091	23.5	19.0	9.0	20.0	15.0/20.0	0.8	28.5	22.0	9.0	25.0	15.0/25.0	0.8	28.5	26.5	13.0	25.0	15.0/25.0	0.8
104	0.10	23.5	19.5	9.5	20.0	15.0/20.0	0.8	28.5	22.5	9.5	25.0	15.0/25.0	0.8	28.5	27.0	14.0	25.0	15.0/25.0	0.8
114	0.11	28.5	18.5	8.5	25.0	15.0/25.0	0.8	28.5	23.0	10.0	25.0	15.0/25.0	0.8						
124	0.12	28.5	19.0	9.0	25.0	15.0/25.0	0.8	28.5	23.5	10.5	25.0	15.0/25.0	0.8						
134	0.13	28.5	19.0	9.5	25.0	15.0/25.0	0.8	28.5	24.0	11.0	25.0	15.0/25.0	0.8						
154	0.15	28.5	20.0	10.0	25.0	15.0/25.0	0.8	28.5	24.5	11.5	25.0	15.0/25.0	0.8						
164	0.16	28.5	21.0	9.5	25.0	15.0/25.0	0.8	28.5	25.0	12.0	25.0	15.0/25.0	0.8						
184	0.18	28.5	22.0	10.5	25.0	15.0/25.0	0.8	28.5	26.0	13.0	25.0	15.0/25.0	0.8						
204	0.20	28.5	22.5	11.0	25.0	15.0/25.0	0.8												
224	0.22	28.5	23.0	11.5	25.0	15.0/25.0	0.8												

カタログ掲載製品の仕様、材質、その他記載内容について予告なく変更する場合がありますので、予めご了承下さい。
ご使用にあたっては、使用上の注意事項をご確認の上、技術仕様書などをお求め願ひ、仕様書の範囲内でのご使用をお願いします。

周波数に対する許容電流特性

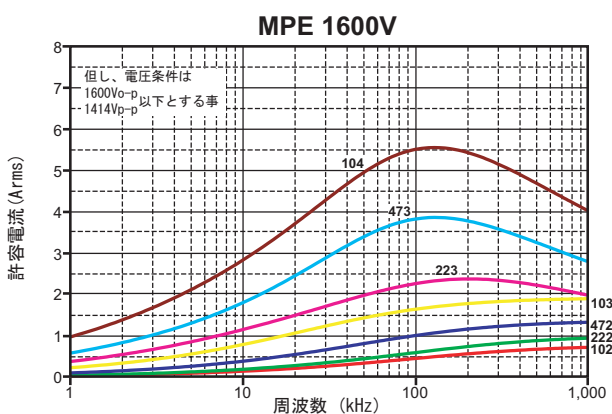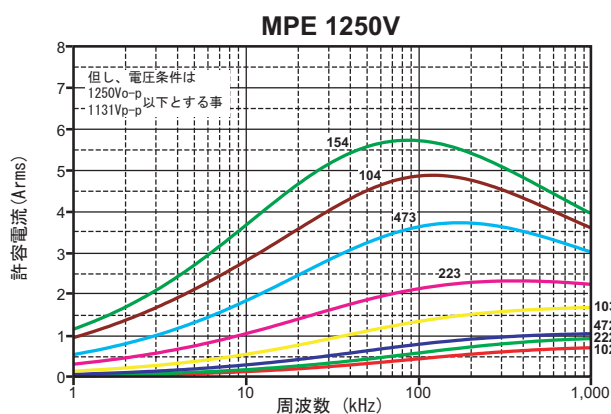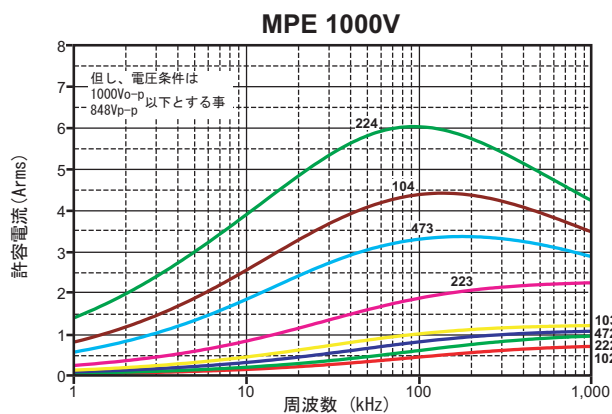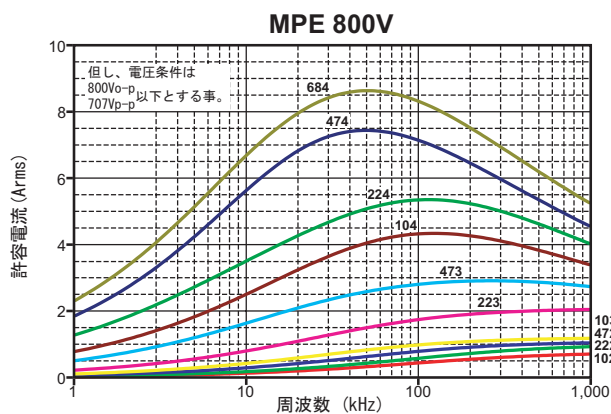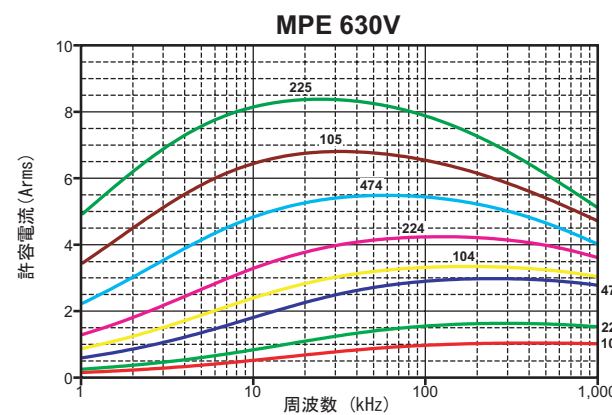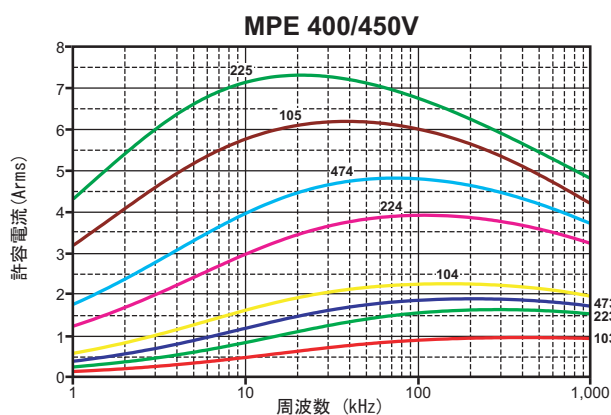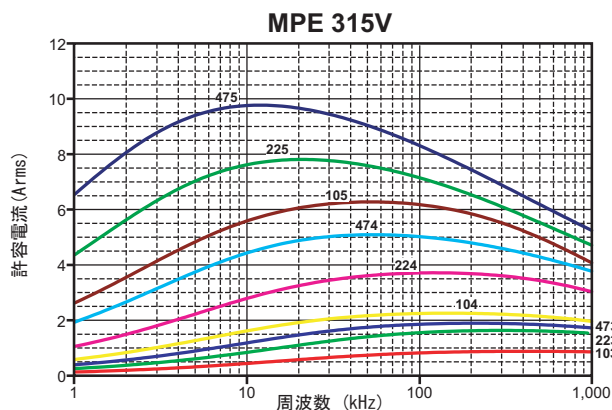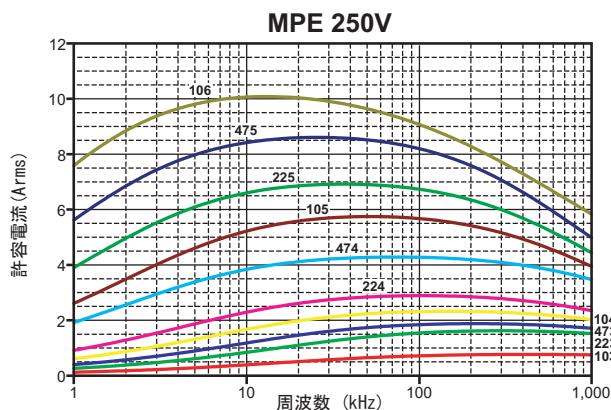

カタログ掲載製品の仕様、材質、その他記載内容について予告なく変更する場合がありますので、予めご了承下さい。
ご使用にあたっては、使用上の注意事項をご確認の上、技術仕様書などをお求め願ひ、仕様書の範囲内でのご使用をお願いします。