


**SWITCHING APPLICATION.
INTERFACE CIRCUIT AND DRIVER CIRCUIT APPLICATION.**

FEATURES


- With Built-in Bias Resistors.
- Simplify Circuit Design.
- Reduce a Quantity of Parts and Manufacturing Process.
- Suffix U : Qualified to AEC-Q101
ex) KRA101S-RTK/HU

EQUIVALENT CIRCUIT

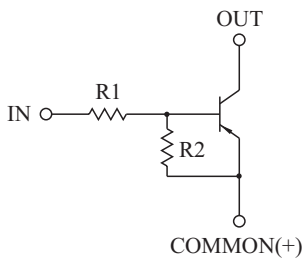

BIAS RESISTOR VALUES

TYPE NO.	R1(k Ω)	R2(k Ω)
KRA101S	4.7	4.7
KRA102S	10	10
KRA103S	22	22
KRA104S	47	47
KRA105S	2.2	47
KRA106S	4.7	47

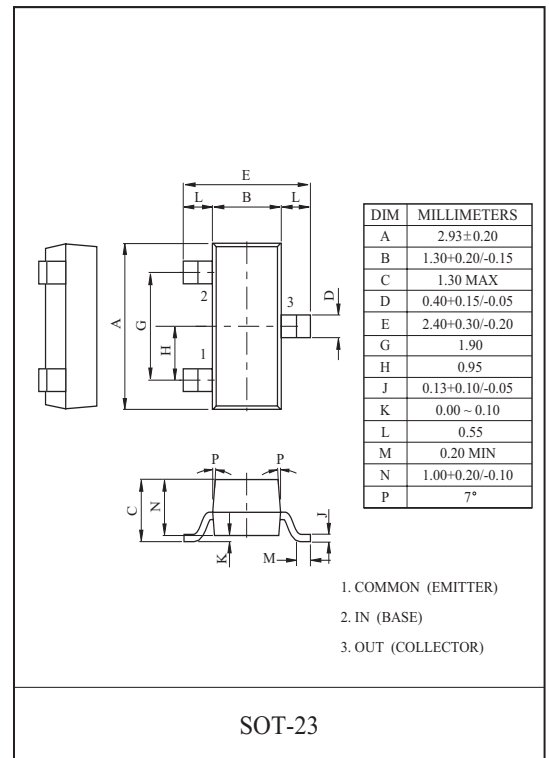


MAXIMUM RATING (Ta=25 $^{\circ}$ C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Output Voltage	KRA101S 106S	V_O	-50	V
Input Voltage	KRA101S	V_I	-20, 10	V
	KRA102S		-30, 10	
	KRA103S		-40, 10	
	KRA104S		-40, 10	
	KRA105S		-12, 5	
	KRA106S		-20, 5	
Output Current	KRA101S 106S	I_O	-100	mA
Power Dissipation		P_D	200	mW
Junction Temperature		T_j	-55~150	
Storage Temperature Range		T_{stg}	-55~150	

MARK SPEC

TYPE	KRA101S	KRA102S	KRA103S	KRA104S	KRA105S	KRA106S
MARK	PA	PB	PC	PD	PE	PF

Marking

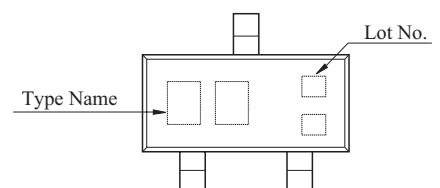

KRA101S~KRA106S

ELECTRICAL CHARACTERISTICS (Ta=25)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Cut-off Current	KRA101S 106S	$I_{O(OFF)}$	$V_O=-50V, V_I=0$	-	-	-500	nA
DC Current Gain	KRA101S	G_I	$V_O=-5V, I_O=-10mA$	30	55	-	
	KRA102S			50	80	-	
	KRA103S			70	120	-	
	KRA104S			80	200	-	
	KRA105S			80	200	-	
	KRA106S			80	200	-	
Output Voltage	KRA101S 106S	$V_{O(ON)}$	$I_O=-10mA, I_I=-0.5mA$	-	-0.1	-0.3	V
Input Voltage (ON)	KRA101S	$V_{I(ON)}$	$V_O=-0.2V, I_O=-5mA$	-	-1.5	-2.0	V
	KRA102S			-	-1.8	-2.4	
	KRA103S			-	-2.1	-3.0	
	KRA104S			-	-2.8	-5.0	
	KRA105S			-	-0.8	-1.1	
	KRA106S			-	-0.9	-1.3	
Input Voltage (OFF)	KRA101S 104S	$V_{I(OFF)}$	$V_O=-5V, I_O=-0.1mA$	-1.0	-1.2	-	V
	KRA105S 106S			-0.5	-0.65	-	
Transition Frequency	KRA101S 106S	f_T^*	$V_O=-10V, I_O=-5mA$	-	200	-	MHz
Input Current	KRA101S	I_I	$V_I=-5V$	-	-	-1.8	mA
	KRA102S			-	-	-0.88	
	KRA103S			-	-	-0.36	
	KRA104S			-	-	-0.18	
	KRA105S			-	-	-3.6	
	KRA106S			-	-	-1.8	
Input Resistor	KRA101S	R1	-	3.29	4.7	6.11	k
	KRA102S			7	10	13	
	KRA103S			15.4	22	28.6	
	KRA104S			32.9	47	61.1	
	KRA105S			1.54	2.2	2.86	
	KRA106S			3.29	4.7	6.11	
Resistor Ratio	KRA101S~104S	R2/R1	-	0.8	1.0	1.2	
	KRA105S			17	21	26	
	KRA106S			8	10	12	







Note : *Characteristic of Transistor Only

KRA101S~KRA106S







ELECTRICAL CHARACTERISTICS (Ta=25)

CHARACTERISTIC			SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Switching Time	Rise Time	KRA101S	t_r	$V_O=-5V$ $V_{IN}=-5V$ $R_L=1k$	-	0.07	-	μs
		KRA102S			-	0.06	-	
		KRA103S			-	0.2	-	
		KRA104S			-	0.24	-	
		KRA105S			-	0.02	-	
		KRA106S			-	0.07	-	
	Storage Time	KRA101S	t_{stg}		-	1.1	-	
		KRA102S			-	1.1	-	
		KRA103S			-	1.1	-	
		KRA104S			-	1.1	-	
		KRA105S			-	1.1	-	
		KRA106S			-	1.1	-	
	Fall Time	KRA101S	t_f		-	0.15	-	
		KRA102S			-	0.24	-	
		KRA103S			-	0.38	-	
		KRA104S			-	0.63	-	
		KRA105S			-	0.1	-	
		KRA106S			-	0.2	-	

KRA101S~KRA106S

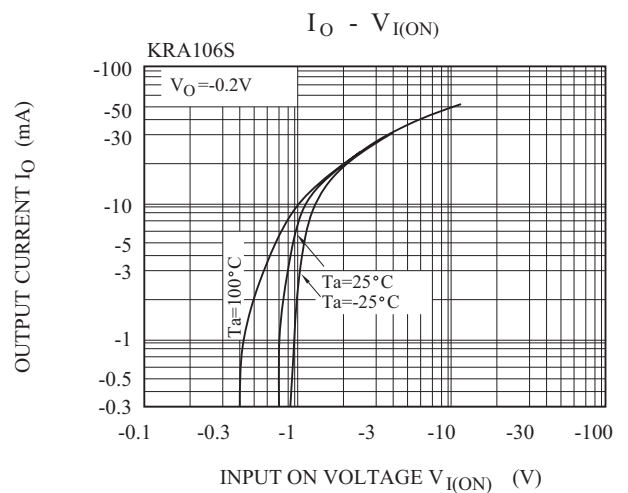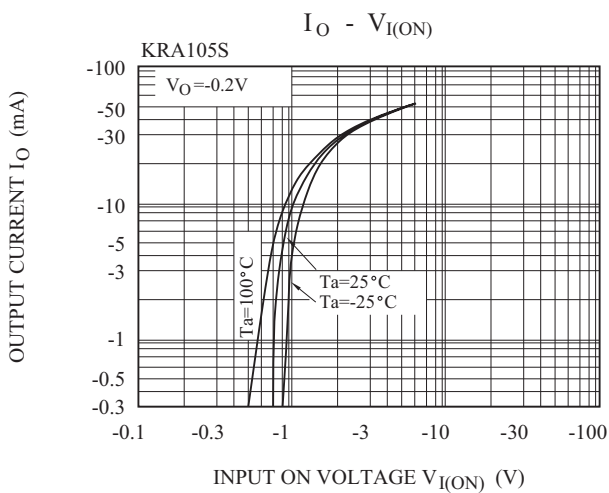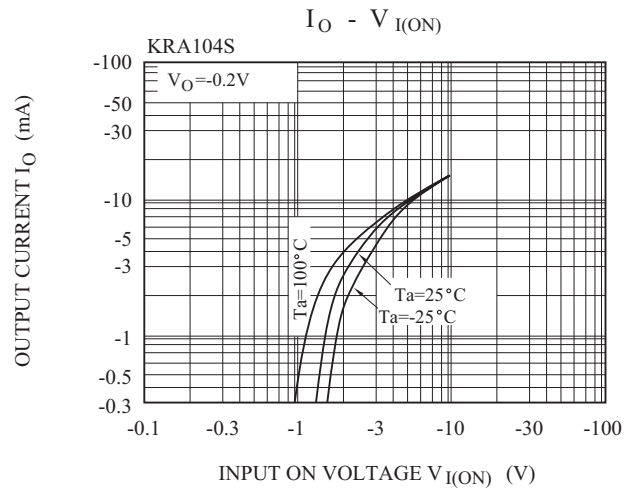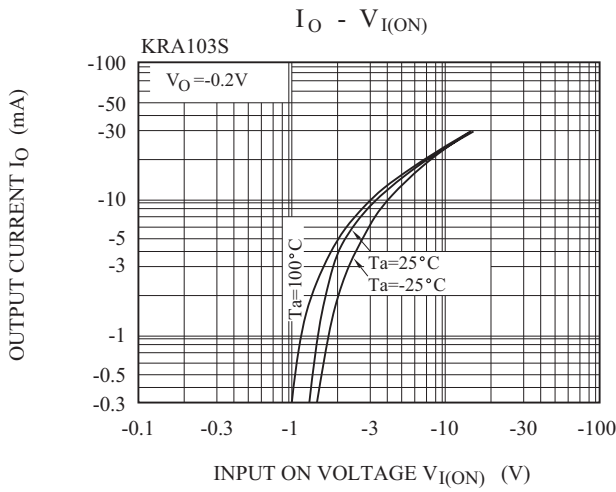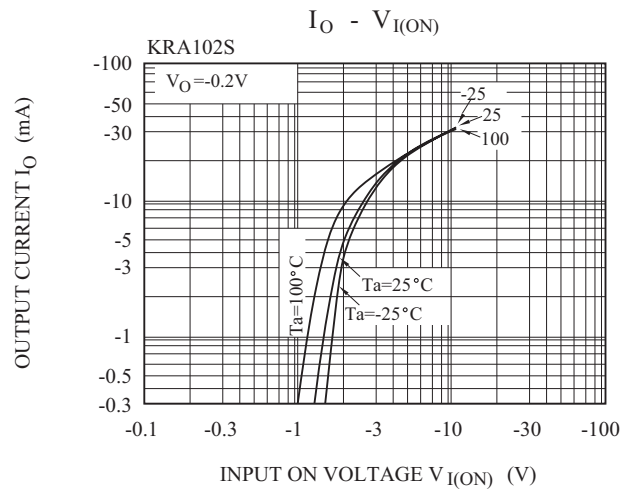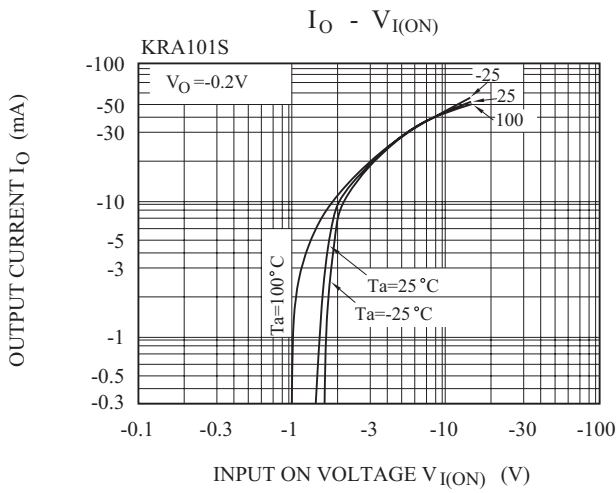

KRA101S~KRA106S

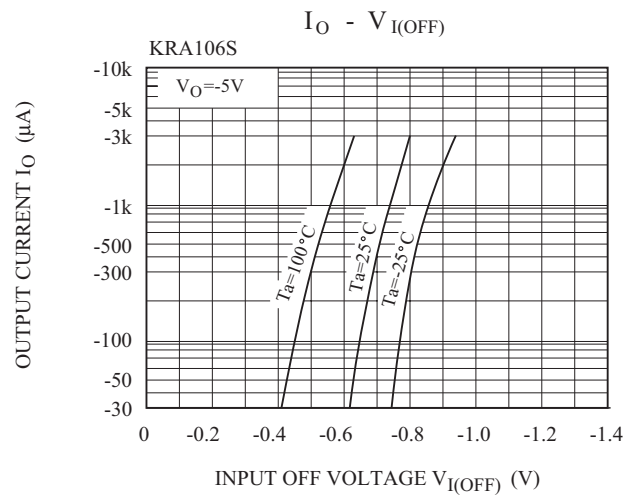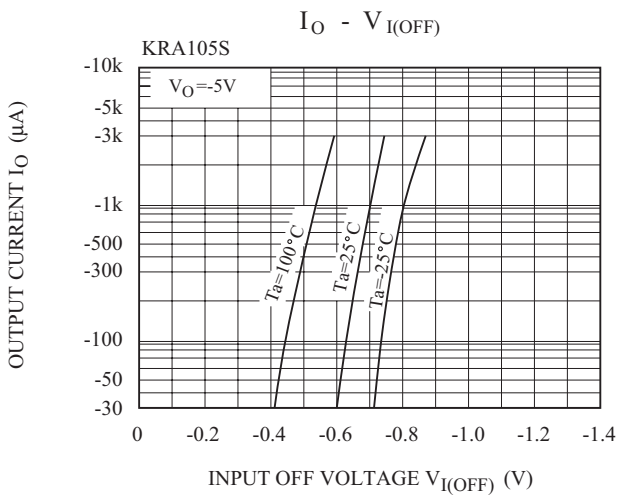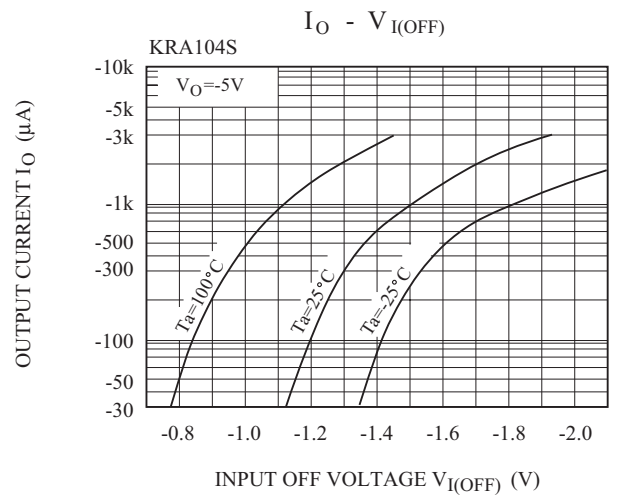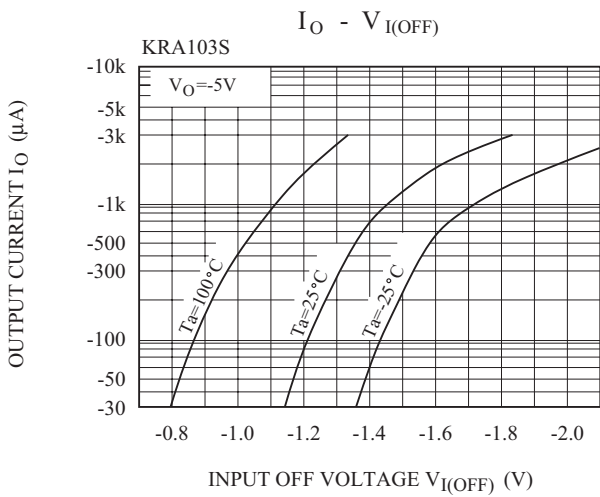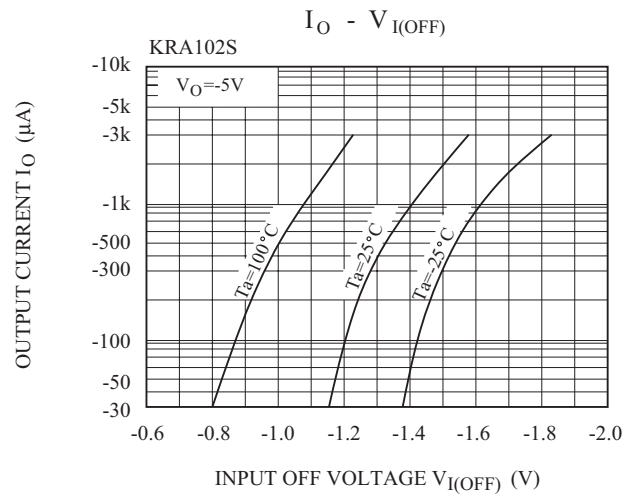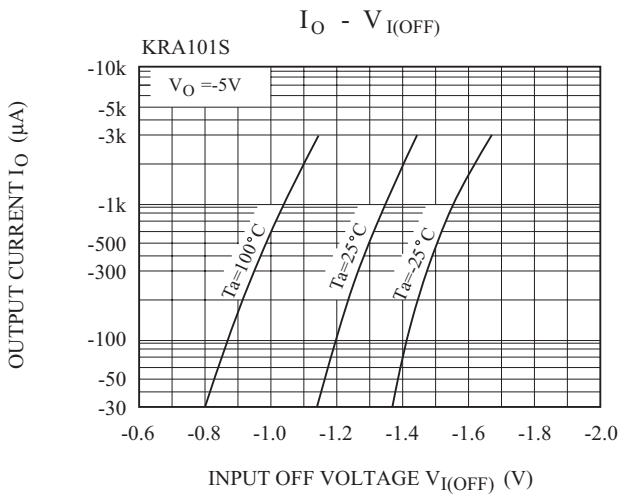

KRA101S~KRA106S

