
## **Features**

- Ultra-miniature 3.2 x 5.0 x 1.3mm package
- Frequency Range 1.000 to 155.520MHz
- Tristate (Enable/Disable) function as standard
- Supply voltage 1.8, 2.5 or 3.3 Volts

## **Description**

QX5 ultra-miniature oscillators consist of a TTL/ HCMOS-compatible hybrid circuit and a miniature quartz crystal packaged in a low-profile, industry-standard ceramic package.








General Specifications				
Frequency Range		0.500 to 156.000MHz		
Output Logic		HCMOS		
Temperature Stability*	Temperature Stability*			
		±50ppm		
		±25ppm		
		±20ppm		
Phase Jitter RMS		<1ps typ.		
Aging per year		±5ppm		
Operating Temperature	Standard	-20 to +70°C		
Range	Industrial	-40 to +85°C		
	Extended	-40 to +105°C		
	Automotive	-40 to +125°C		
Storage Temperature Range		-55 to +125°C		

<sup>\*</sup> Frequency stability is inclusive of calibration tolerance at 25°C, frequency change due to shock & vibration,  $\pm 10\%$  supply voltage variation and stability over temperature range.

Electrical Specifications						
Supply Voltage		1.8Vdd ± 5%	2.5Vdd ± 5%	3.3Vdd ± 5%		
Input Current	0.500 to 20.000MHz	5mA	8mA	7mA		
	20.100 to 32.000MHz	6mA	8mA	12mA		
	32.100 to 50.000MHz	15mA	20mA	20mA		
	50.100 to 80.000MHz	15mA	20mA	25mA		
	80.100 to 156.000MHz	25mA	30mA	40mA		
Output Voltage	Logic High (Voh)	90%	(80% at 1.8) Vdd	min.		
	Logic Low (Vol)	10%	(20% at 1.8) Vdd	max.		
	Standard	40 to 60%				
	Tight	45 to 55%				
Output Current	Lol/Loh	±2mA min.				
Output Load		15pF max.				
Rise and Fall	0.500 to 32.000MHz	5ns max.	5ns max.	10ns max.		
Time	32.100 to 50.000MHz	5ns max.	5ns max.	10ns max.		
	50.100 to 80.000MHz	4ns max.	4ns max.	8ns max.		
	80.100 to 100.000MHz	3ns max.	3ns max.	5ns max.		
	100.100 to 156.000MHz	3ns max.	3ns max.	4ns max.		
Standby Current		10µA max.				
Enable-Disable Function		Tri-State				
Output Disable Time		300ns max. 150ns max.				
Output Enable Ti	me	10ms max. 10ms max.				
Start Up Time			10 ms max.			

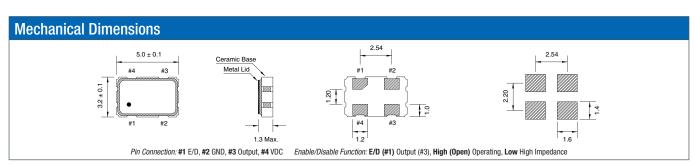


Part Nu	ımbering Gı	uide							
Qantek Code	Package	Supply Voltage	Frequency Stability	Frequency	Operating Tem- perature Range	Automotive Indicator	Load Capacitance	Tight Symmetry Indicator	Packaging
Q = Qantek	X5 = 3.2x5.0	18 = 1.8V 25 = 2.5V 33 = 3.3V	A = ±25ppm <b>B = ±50ppm</b> C = ±100ppm D = ±20ppm	in MHz, always 8 digits including the decimal point (f.ie. 20.00000)	A = -20 to +70°C B = -40 to +85°C C = -40 to +105°C D = -40 to +125°C	A = AEC-Q200	15 = 15pF	T = 45/55	R = Tape&Reel M = Minireel (250pcs Tape&Reel)



**QANTEK Technology Corporation** 

Phone: +1 877-227-0440 (tollfree) www.qantek.com +1 877-227-0440 (tollfree) info@qantek.com

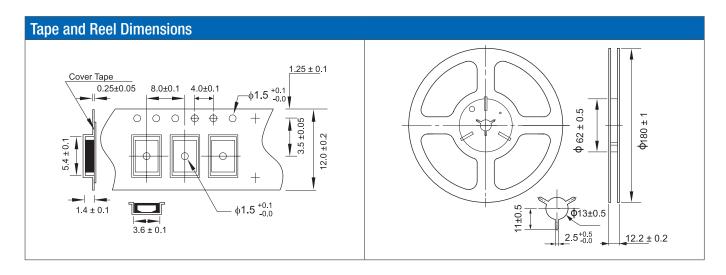

## **Marking Code Guide**

Contains frequency, Qantek manufacturing Code, production code (month and year), stability, temperature range and voltage indicator.

Month Codes			
January	Α	July	G
February	В	August	Н
March	С	September	1
April	D	October	J
May	Ε	November	K
June	F	December	L

υι	des			
9	2020	0	2021	1
2	2023	3	2024	4
5	2026	6	2027	2
	9	9 2020 2 2023	9 2020 0 2 2023 3	9 2020 0 2021 2 2023 3 2024


Stability		
ppm	PN Code	
20	D	
25	Α	
50	В	
100	С	
custom	S	

Temperature Range		
°C	PN Code	
-20 to +70°C	Α	
-40 to +85°C	В	
-40 to +105°C	С	
-40 to +125°C	D	
custom	S	

Voltage	
Volt	PN Code
1.8	1
2.5	2
3.3	3
5.0	5
custom	S

Example: First Line: 20.000 (Frequency)

Second Line: QA9BB3 (Qantek – January – 2019 –  $\pm$ 50ppm – -40 to +85°C – 3.3V)

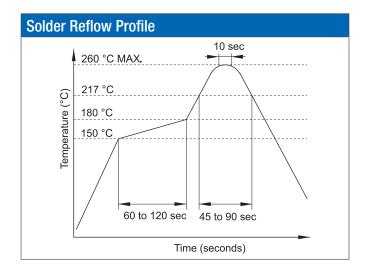

Environmental Specifications		
Mechanical Shock	MIL-STD-202, Method 213, C	
Vibration	MIL-STD-202, Method 201 & 204	
Thermal Cycle	MIL-STD, Method 1010, B	
Gross Leak	MIL-STD-202, Method 112	
Fine Leak	MIL-STD-202, Method 112	

All specifications are subject to change without notice.



**QANTEK Technology Corporation** 

Phone: +1 877-227-0440 (tollfree) Fax: +1 877-227-0440 (tollfree)

www.qantek.com info@qantek.com