

SI-8000E Series**Full-Mold, Separate Excitation Step-down Switching Mode****■Features**

- Compact full-mold package (equivalent to TO220)
- High efficiency: 80%
- Requires only 4 discrete components
- Internally-adjusted phase correction and output voltage
- Built-in reference oscillator (60kHz)
- Built-in overcurrent and thermal protection circuits

■Applications

- Power supplies for telecommunication equipment
- Onboard local power supplies

■Recommended Operating Conditions



Parameter	Symbol	Ratings		Unit
		SI-8050E		
DC Input Voltage Range	V _{IN}	7 to 40		V
Output Current Range	I _O	0 to 0.6		A
Operating Junction Temperature Range	T _{jop}	-30 to +125		°C
Operating Temperature Range	T _{op}	-30 to +125		°C

■Electrical Characteristics(T_a=25°C)

Parameter	Symbol	Ratings			Unit
		SI-8050E			
Output Voltage	V _O	4.80	5.00	5.20	V
	Conditions		V _{IN} =20V, I _O =0.3A		
Efficiency	η		80		%
	Conditions		V _{IN} =20V, I _O =0.3A		
Oscillation Frequency	f		60		kHz
	Conditions		V _{IN} =20V, I _O =0.3A		
Line Regulation	ΔV _{OLINE}		80	100	mV
	Conditions		V _{IN} =10 to 30V, I _O =0.3A		
Load Regulation	ΔV _{OLOAD}		30	40	mV
	Conditions		V _{IN} =20V, I _O =0.1 to 0.4A		
Temperature Coefficient of Output Voltage	ΔV _{O/ΔT_a}		±0.5		mV/°C
Overcurrent Protection Starting Current	I _{s1}	0.61			A
	Conditions		V _{IN} =10V		

■External Dimensions (TO220F-5)

(Unit : mm)

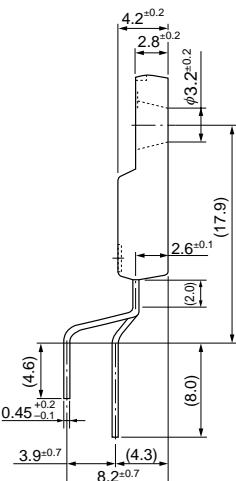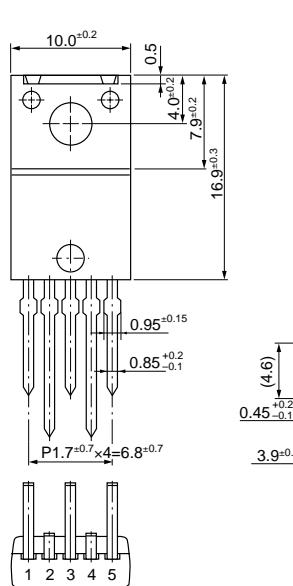

Pin Assignment

- ① VIN
- ② SWOUT
- ③ GND
- ④ Vos
- ⑤ N.C


Plastic Mold Package Type

Flammability: UL94V-0


Product Mass: Approx. 2.3g

Forming No. 1101


■Block Diagram

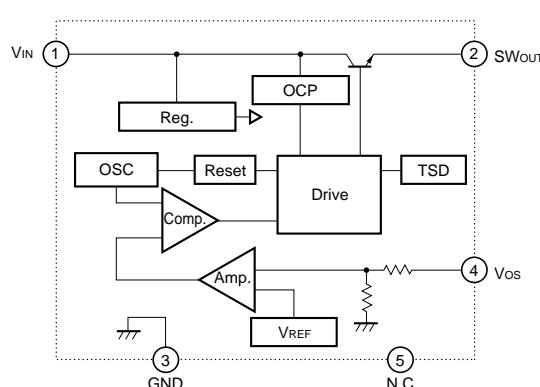

■Typical Connection Diagram

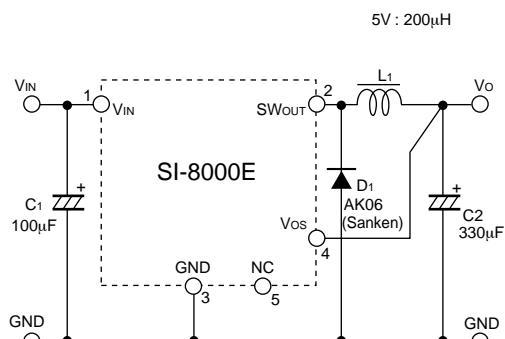

■Ta-Pd Characteristics

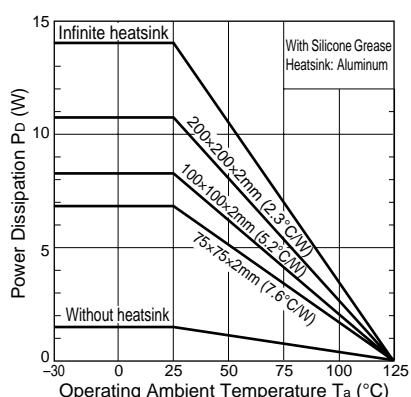

$$P_d = V_o \cdot I_o \left(\frac{100}{\eta x} - 1 \right) - V_F \cdot I_o \left(1 - \frac{V_o}{V_{IN}} \right)$$

The efficiency depends on the input voltage and the output current. Therefore, obtain the value from the efficiency graph and substitute the percentage in the formula above.

- V_o : Output voltage
- V_{IN} : Input voltage
- I_o : Output current
- ηx : Efficiency (%)
- V_F : Diode D1 forward voltage
0.4V(AK06)

Thermal design for D1 must be considered separately.