



┃ 構造

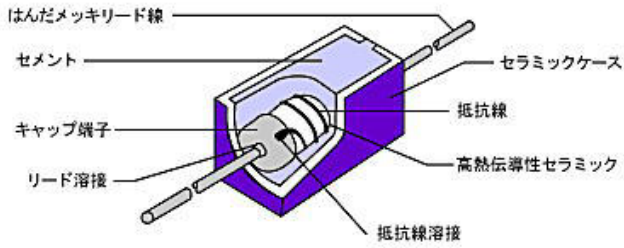

┃ 形状

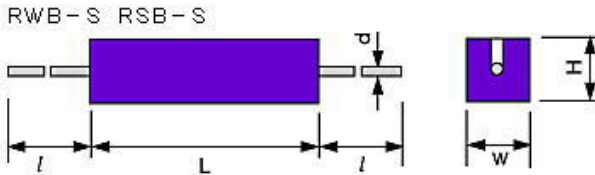

| 形名 | 定格電力 | 寸法 | | | | |
|---------------|------|---------|-------|-------|-------|-----|
| | | L ± 1.5 | W ± 1 | H ± 1 | l ± 3 | d |
| RWBS1,RSBS1 | 1W | 13.5 | 6.0 | 6.0 | 30 | 0.8 |
| RWBS2,RSBS2 | 2W | 18 | 6.3 | 6.3 | 35 | 0.8 |
| RWBS3,RSBS3 | 3W | 22 | 8.0 | 8.0 | 35 | 0.8 |
| RWBS5,RSBS5 | 5W | 22 | 9.5 | 9.0 | 35 | 0.8 |
| RWBS7,RSBS7 | 7W | 35 | 9.5 | 9.0 | 35 | 0.8 |
| RWBS10,RSBS10 | 10W | 50 | 10.0 | 9.5 | 35 | 0.8 |
| RWBS15,RSBS15 | 15W | 50 | 12.5 | 12.5 | 35 | 0.8 |
| RWBS20,RSBS20 | 20W | 63 | 12.5 | 12.5 | 35 | 0.8 |

| 形名 | 抵抗値範囲(Ω) | | 許容差 |
|---------------|-----------|-------------|--------------------|
| | RWB□ | RSB□ | |
| RWBS1,RSBS1 | 10mΩ~100Ω | 110Ω~15kΩ | ±5%(J), ±10%(K) |
| RWBS2,RSBS2 | 10mΩ~300Ω | 330Ω~20kΩ | |
| RWBS3,RSBS3 | 10mΩ~470Ω | 510Ω~39kΩ | |
| RWBS5,RSBS5 | 10mΩ~470Ω | 510Ω~51kΩ | |
| RWBS7,RSBS7 | 0.1Ω~470Ω | 510Ω~100kΩ | |
| RWBS10,RSBS10 | 0.1Ω~1KΩ | 1.1KΩ~150kΩ | |
| RWBS15,RSBS15 | 1Ω~1KΩ | 1.1Ω~200kΩ | |
| RWBS20,RSBS20 | 1Ω~1.5KΩ | 1.6Ω~240kΩ | |