

# **Device Modeling Report**

**COMPONENTS:**

DIODE/ GENERAL PURPOSE RECTIFIER/ PROFESSIONAL

PART NUMBER: 1S1887

MANUFACTURER: TOSHIBA

REMARK: TC=25C




**Bee Technologies Inc.**


PSpice model parameter	Model description
IS	Saturation Current
N	Emission Coefficient
RS	Series Resistance
IKF	High-injection Knee Current
CJO	Zero-bias Junction Capacitance
M	Junction Grading Coefficient
VJ	Junction Potential
ISR	Recombination Current Saturation Value
BV	Reverse Breakdown Voltage(a positive value)
IBV	Reverse Breakdown Current(a positive value)
TT	Transit Time
EG	Energy-band Gap

## Forward Current Characteristic

### Circuit Simulation Result

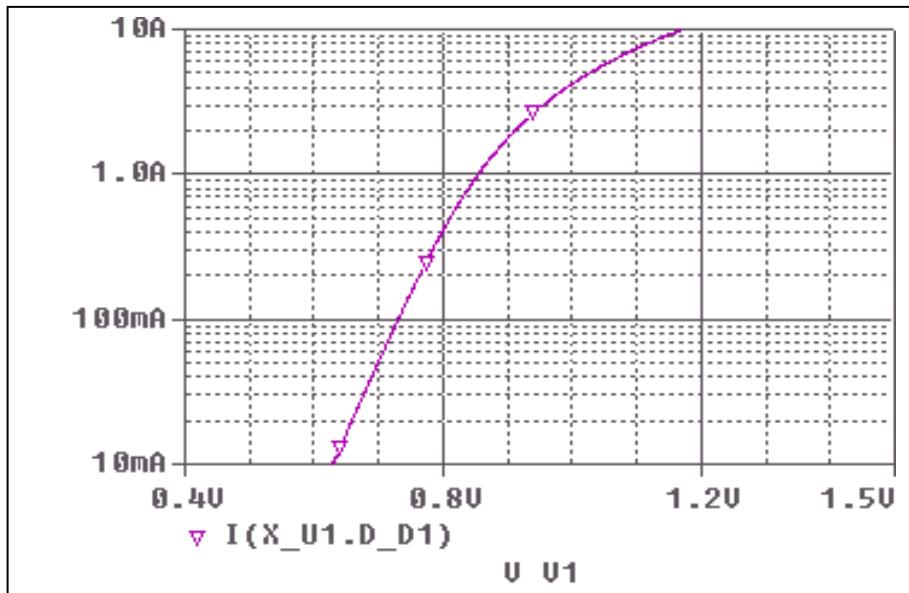


### Evaluation Circuit

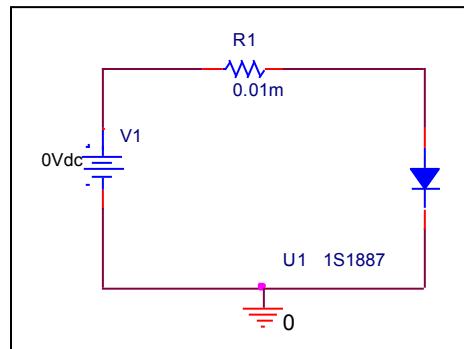

## Comparison Graph

### Circuit Simulation Result

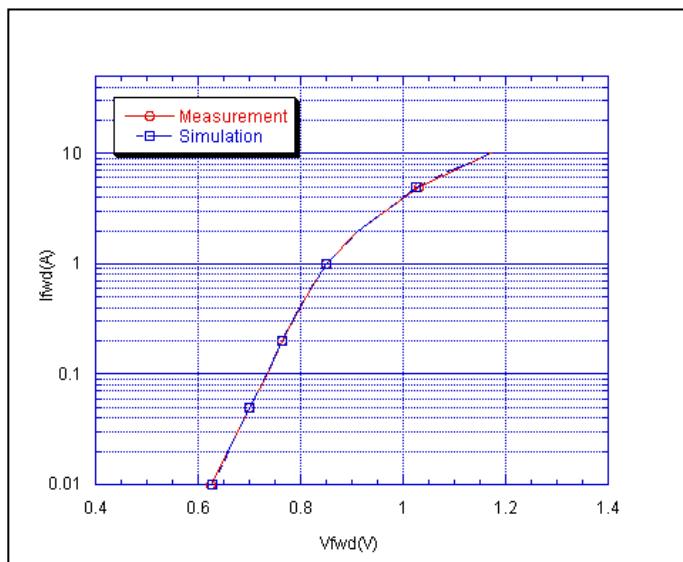


### Simulation Result


Ifwd(A)	Vfwd(V) Measurement	Vfwd(V) Simulation	%Error
0.01	0.626	0.629	-0.399
0.02	0.658	0.657	0.137
0.05	0.701	0.701	-0.014
0.1	0.735	0.736	-0.082
0.2	0.765	0.764	0.092
0.5	0.810	0.810	-0.037
1	0.850	0.851	-0.165
2	0.910	0.911	-0.132
5	1.030	1.026	0.408
10	1.171	1.171	-0.034

## Junction Capacitance Characteristic

### Circuit Simulation Result

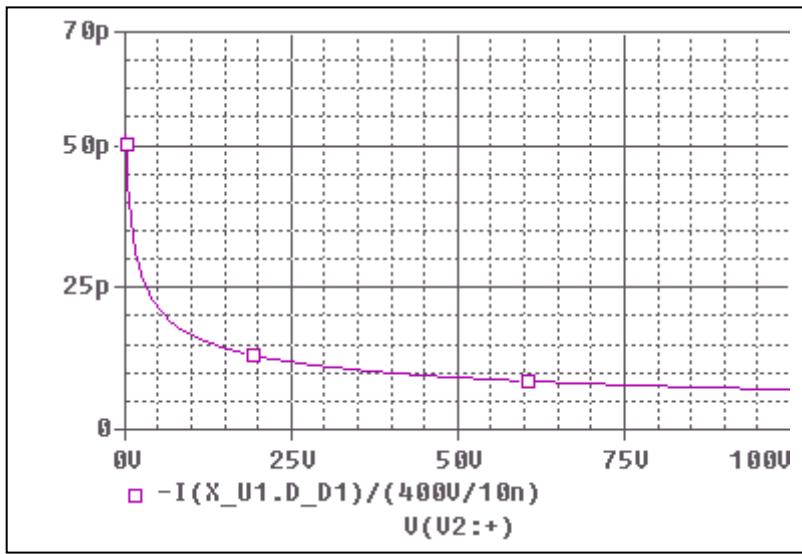


### Evaluation Circuit

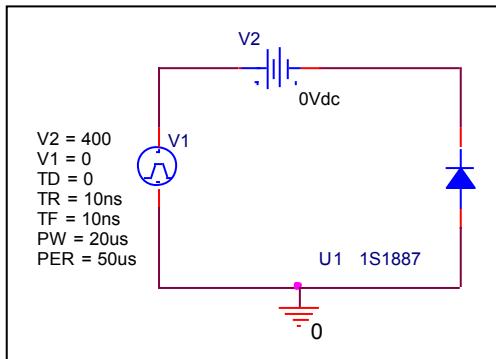

## Comparison Graph

### Circuit Simulation Result

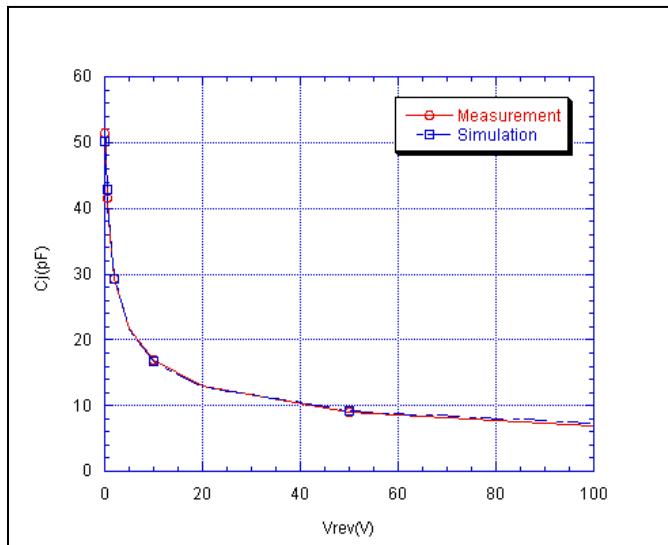


### Simulation Result


$V_{rev}$ (V)	$C_j$ (pF) Measurement	$C_j$ (pF) Simulation	%Error
0	<b>55.832</b>	<b>55.832</b>	<b>0.000</b>
0.1	<b>51.537</b>	<b>50.127</b>	<b>2.736</b>
0.2	<b>48.403</b>	<b>50.617</b>	<b>-4.574</b>
0.5	<b>41.632</b>	<b>42.862</b>	<b>-2.954</b>
1	<b>35.607</b>	<b>36.107</b>	<b>-1.404</b>
2	<b>29.252</b>	<b>29.375</b>	<b>-0.420</b>
5	<b>21.729</b>	<b>21.492</b>	<b>1.091</b>
10	<b>16.895</b>	<b>16.773</b>	<b>0.722</b>
20	<b>12.887</b>	<b>12.950</b>	<b>-0.489</b>
50	<b>8.986</b>	<b>9.158</b>	<b>-1.912</b>
100	<b>6.778</b>	<b>7.034</b>	<b>-3.769</b>

## Reverse Recovery Characteristic

### Circuit Simulation Result

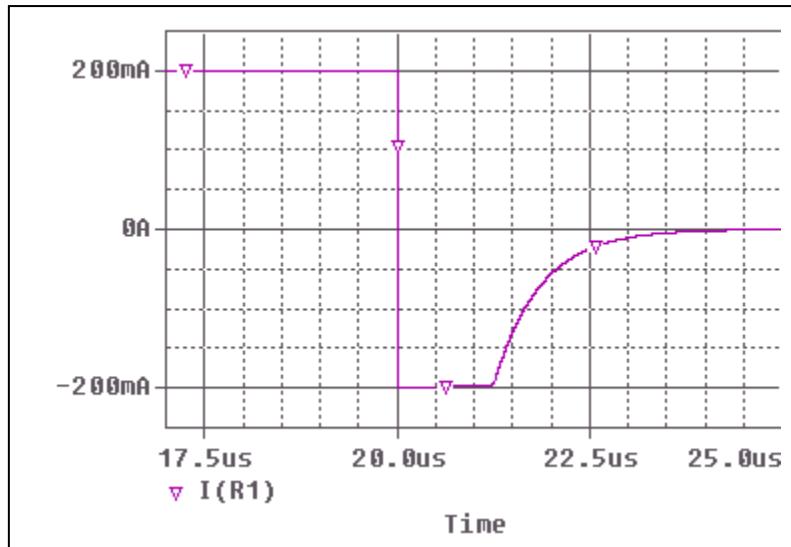

### Evaluation Circuit

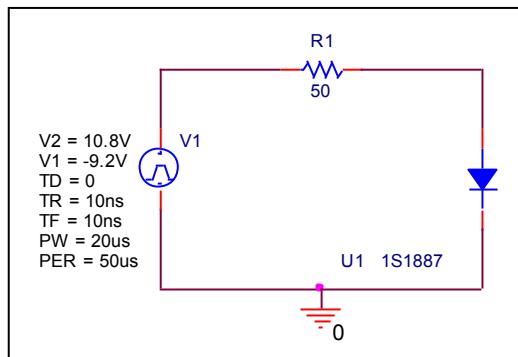


Compare Measurement vs. Simulation

	Measurement		Simulation		%Error
trj	1.24	us	1.23	us	0.40
trb	1.34	us	1.33	us	0.44

## Reverse Recovery Characteristic


Reference

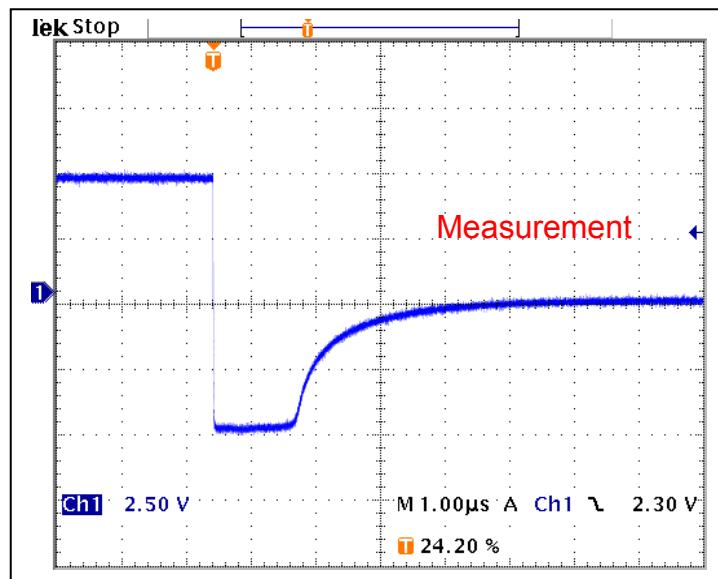

$$Trj = 1.24(\mu s)$$

$$Trb = 1.34(\mu s)$$

Conditions: Ifwd=Irev=0.2(A), RI=50

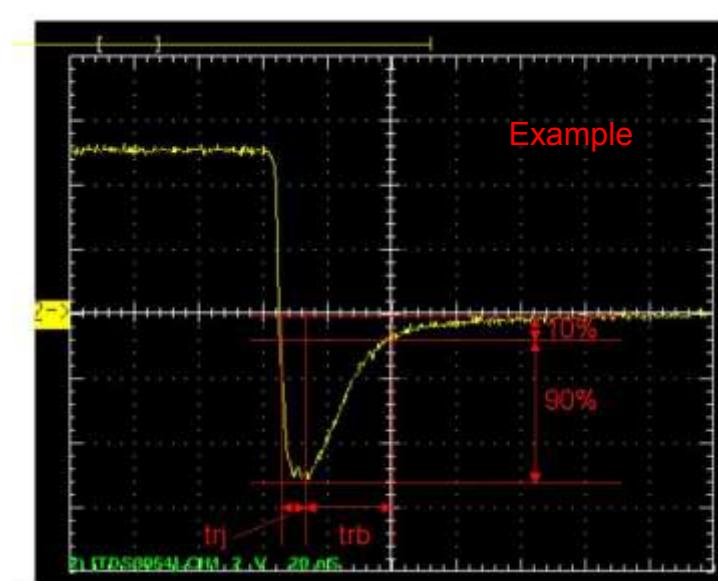

Relation between trj and trb