
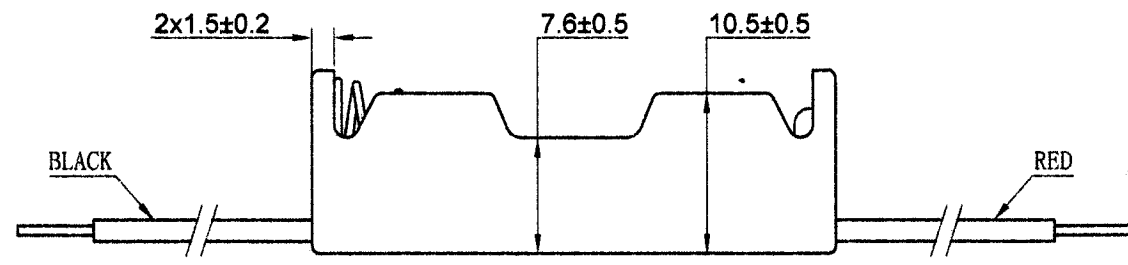


CT11-1125 P20/25

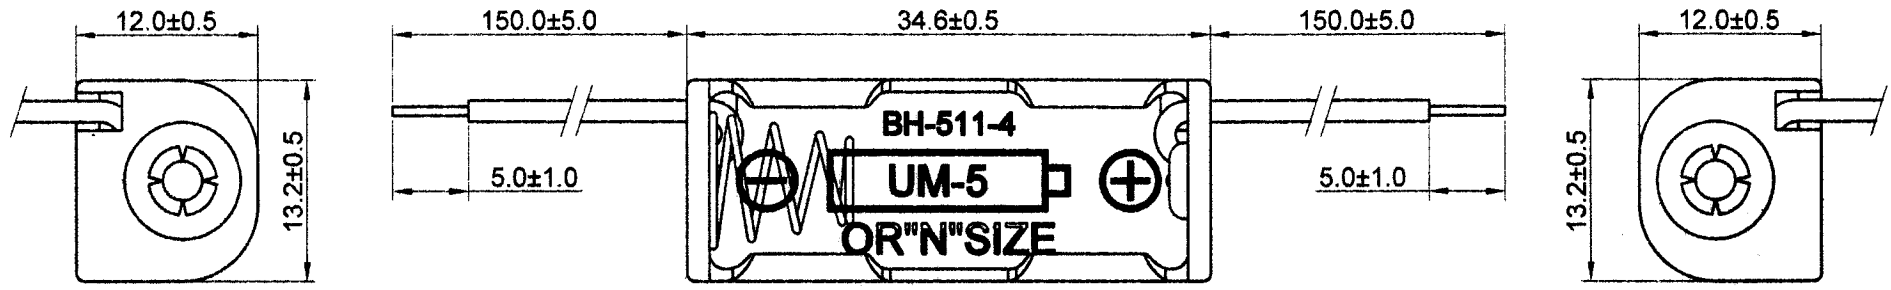

**SPECIFICATION**

- (1) ITEM NO. : BH-511-4A
- (2) WIRE: UL1007 AWG#26  
BLACK & RED: 150MM±5MM  
STRIP & TIN: 5MM±1MM
- (3) HOLDER MATERIAL: P.P. RESIN, BLACK COLOR
- (4) SPRING MATERIAL: Ø0.5MM 65C SPRING STEEL NICKEL PLATED
- (5) RIVET MATERIAL: BRASS NICKEL PLATED
- (6) RoHS COMPLIANT

3								
2								
1								
NO.	MODIFICATION	DATE	NAME	BATTERY HOLDER: BH-511-4A				
			SCALE	2:1	APPD	<i>[Signature]</i>		
General Tolerances			 The Third Angle Projection	UNIT	MM	CHKD	<i>[Signature]</i>	
0 ~ >3	± 0.10	30 ~ >120		± 0.30	MAT'L	AS SPEC.	DWN	HUANGAILAN
3 ~ >6	± 0.10	120 ~ >400		± 0.50	DATE	NOV. 19. 2011	DR NO	5114A-1111
6 ~ >30	± 0.20	Angle: ± 3°						