


# F4006ABTYPE

循環軸受け/メタルインペラ

(40x40x6.4mm)

Dimensions: Not to scale

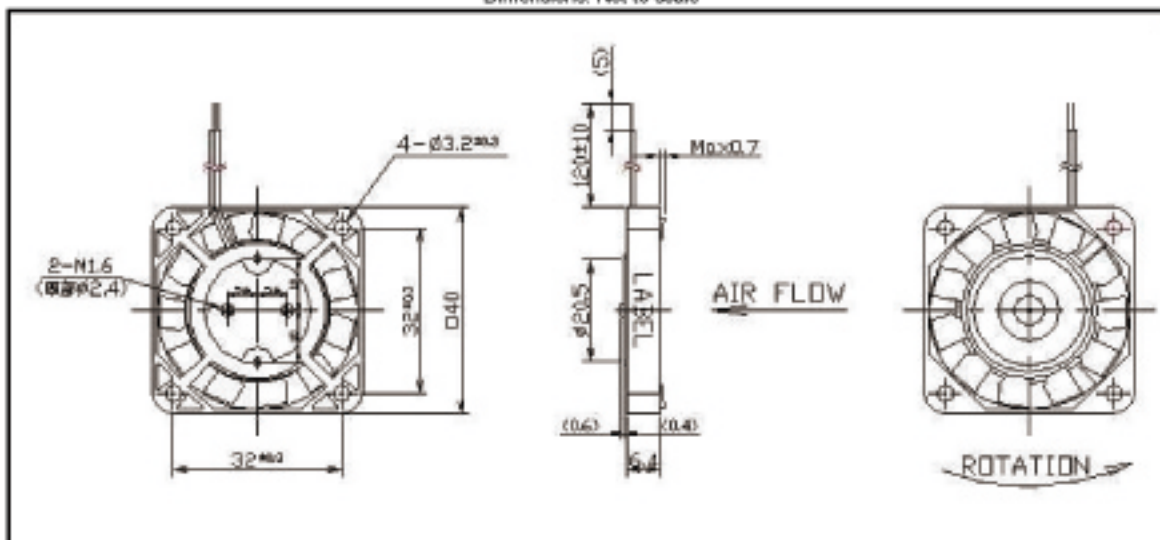

## Specifications

機種名 (Model) F4006AB-05QCV F4006AB-12QCV

定格電圧 (DCV)	5	12			
Rated voltage					
使用電圧範囲 (DCV)	4.5~5.5	10.2~13.8			
Operating voltage range					
定格電流 (A)	0.19	0.09			
Rated current					
定格入力 (W)	0.95	1.08			
Rated input					
最大風量 (m <sup>3</sup> /min)	0.09	0.09			
Max Air Volume					
最大静圧 (Pa)	17.6	19.6			
Max Static Pressure					
A特性音圧レベル (dB)	27	27			
Noise LV at 1m (A-weighted)					
回転速度 (min <sup>-1</sup> )	5,000	5,000			
Rotation frequency					
期待寿命 (h)	20,000				
Life expectancy	★ Room temp-humidity				

使用温度範囲(Operating temp. range): -10 ~ +60°C(12V) ★★

保存温度範囲(Storage temp. range): -40 ~ +70 ★★

リード線(Lead Wire): UL1571 AWG28 12V: Red(+), Black(-)

重量(Weight): 12.5g

絶縁抵抗(Insulation resist.): Min 10M Ω at DC500V (Between frame and leadwire)

耐電圧(Voltage withstand): 5mA (AC500V 1minute or AC600V 1 second, between frame and leadwire)

★In room temperature and humidity ★★In room humidity Room temp.=20±15°C, Room humidity=65±20%

0203

Specifications subject to change without notice. Copyright ©2002 Shicoh Engineering Co., Ltd.

<http://www.shicoh.com>

 SHICOH