

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

ALL RIGHTS RESERVED.

1. MATERIAL: HOUSING: GLASS FILED THERMO PLASTIC POLYESTER(94V-0), COLOR: BLACK
CONTACT: COPPER ALLOY
RETENTION LEG: PRE-TIN COPPER ALLOY

2. FINISH(ALL OVER): NICKEL PL. 1.27μmMIN

3. FINISH(CONTACT AREA): GOLD PL. 0.38μmMIN AFTER 2

4. FINISH(CONTACT TAIL): TIN PL. 2μmMIN AFTER 2

5. THE SHAPE, SIZE AND POSITION OF THE CHARACTER SHOW THE OUTLINE. THEY DON'T SHOW DETAILS.

6. THE KEYING ARRANGEMENT OF "Y" IS SYMMETRIC WITH "X".

1. 材料:ハウジング:ガラス入り熱可塑性ポリエステル樹脂(94V-0)、色:黒
コンタクト:銅合金
リテンションレグ:錫めっき済銅合金

2. めっき:全面:ニッケル下地めっき1.27μm以上

3. めっき:接触部 2の上に金めっき0.38μm以上

4. めっき:コンタクト半田付部: 2の上に錫めっき2μm以上

5. 文字の形状、大きさ、および位置については、大略を示すものであり、詳細を示すものではありません。

6. Y KEY形状は、X KEY形状と左右対称

LOGO MARK

SERIES CODE

CIRCUIT NO

1

X

10

KEYING

CAVITY MARK
(ALPHABET: CAPITAL LETTER)

C

B

2.5Xn=A

2.5

9.1

11.8

3.3

1.65

CONTACT TAB

CONTACT TAIL

1-1827876-0
(20POS:X-KEY)

ROW ID
BOTH SIDE

HDR HSG

15

3.05

3.1

3.1

7

0.45

2.5

RETENTION LEG

2.5Xn=A±0.05

2.5±0.05

0.45 REF

2.5±0.05

7±0.05

15 REF

POS.-Ø0.8±0.05
DRILL DIA

POS.-Ø1.6±0.1
ROUND DIA

2-Ø1.5±0.1
DRILL DIA

2-Ø2.3MIN
ROUND DIA

OUTLINE OF HDR HSG

推奨基板取付寸法 : コネクタ搭載面(非累積公差)
PC基板厚 : 1.0~1.6±0.1

RECOMMEND PC BOARD HOLE PATTERN
: CONNECTOR MOUNT SIDE(NOT ACCUMULATE TOLERANCE)
PC BOARD THICKNESS : 1.0~1.6±0.1

AS SHOWN : 1-1827876-0 (20POS:X-KEY)
ONLY 4POS----SEE SHEET 2 OF 3

20	Y	9	22.5	26.0	27.6	2-1827876-0
20	X	9	22.5	26.0	27.6	1-1827876-0
12	Y	5	12.5	16.0	17.6	2-1827876-6
12	X	5	12.5	16.0	17.6	1-1827876-6
8	Y	3	7.5	11.0	12.6	2-1827876-4
8	X	3	7.5	11.0	12.6	1-1827876-4
6	Y	2	5.0	8.5	10.1	2-1827876-3
6	X	2	5.0	8.5	10.1	1-1827876-3
4	Y	1	2.5	6.0	7.6	2-1827876-2
4	X	1	2.5	6.0	7.6	1-1827876-2
POS	KEY	n	A	B	C	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
T. KUDO

13JAN2005

CHK
D. MITSUGI

14MAR2005

APVD
D. MITSUGI

14MAR2005

NAME
名称

PRODUCT SPEC
製品規格

108-78268

APPLICATION SPEC
取付適用規格

114-5377

WEIGHT

-

CUSTOMER DRAWING

SCALE
尺度

6:1

SHEET
1

OF
3

REV
C1

RESTRICTED TO

-


TE Connectivity

DYNAMIC DI200D 2.5mmPITCH
HDR ASSY (H-TYPE)
4-20POS

DRAWING NO
番号

A200779C-1827876

1471-9 (3/11)
Pro/ENGINEER DRAWING

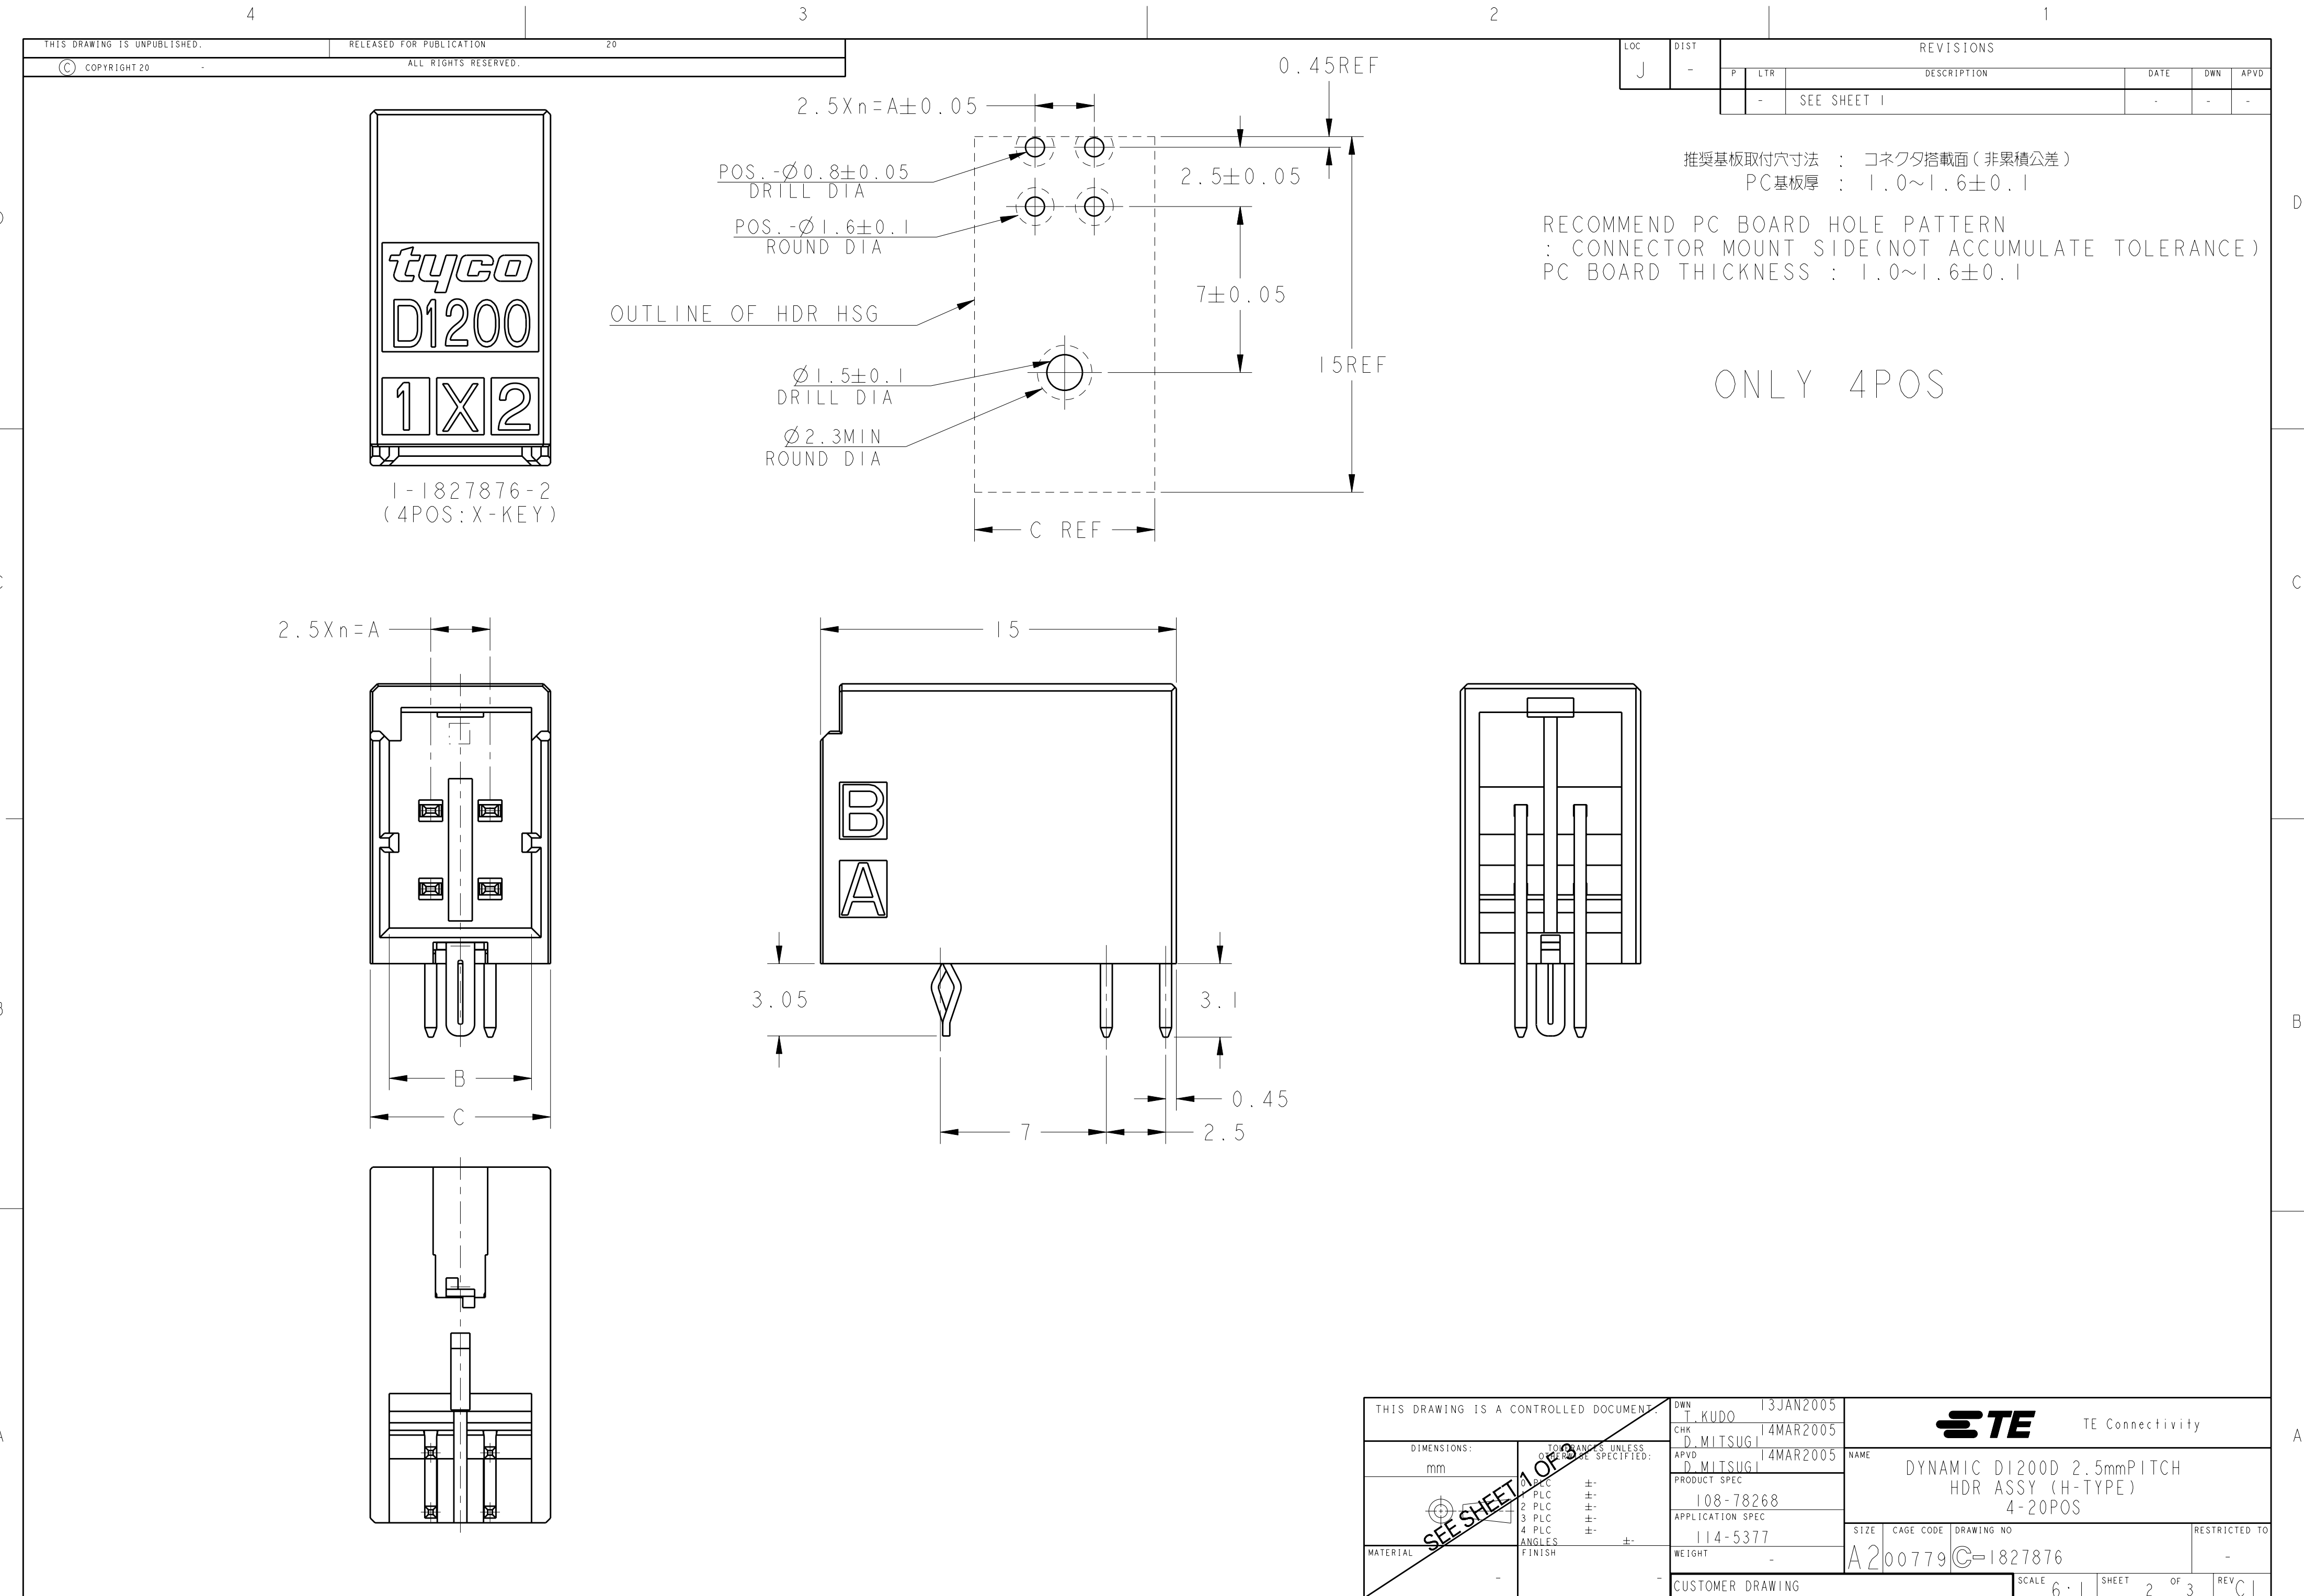

D

C

B

A


D

C


B

A


D

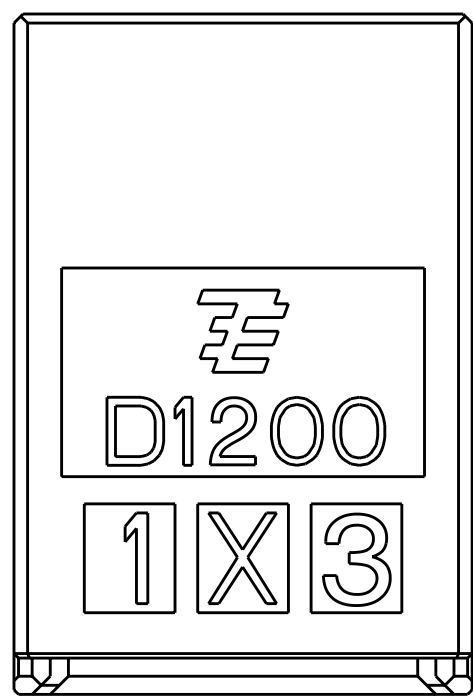

I-1827876-3
(6POS:X-KEY)



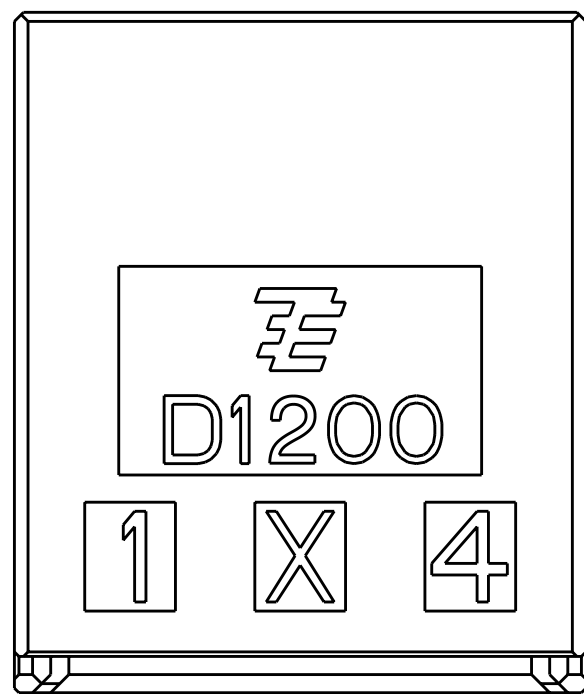


I-1827876-4
(8POS:X-KEY)



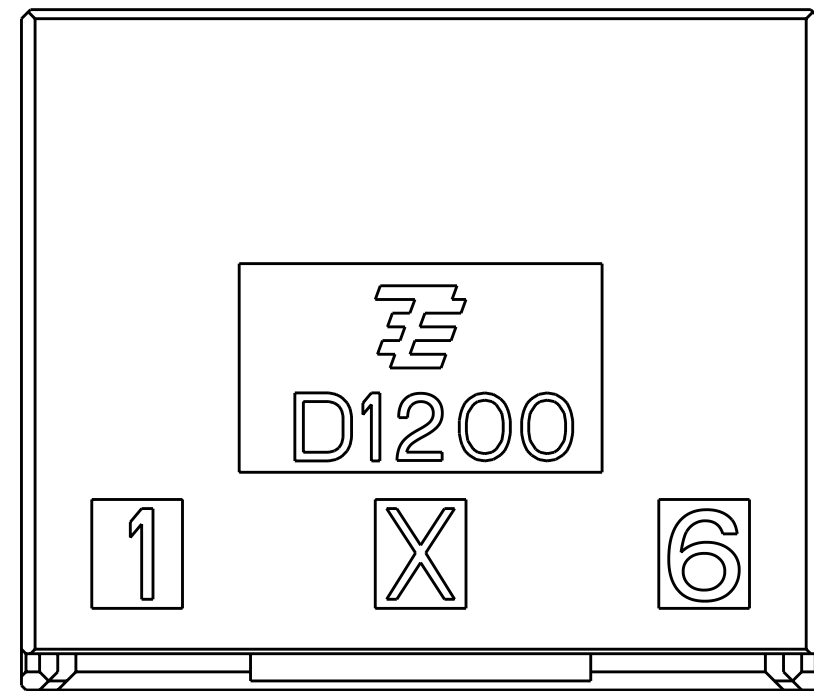


I-1827876-6
(12POS:X-KEY)

C

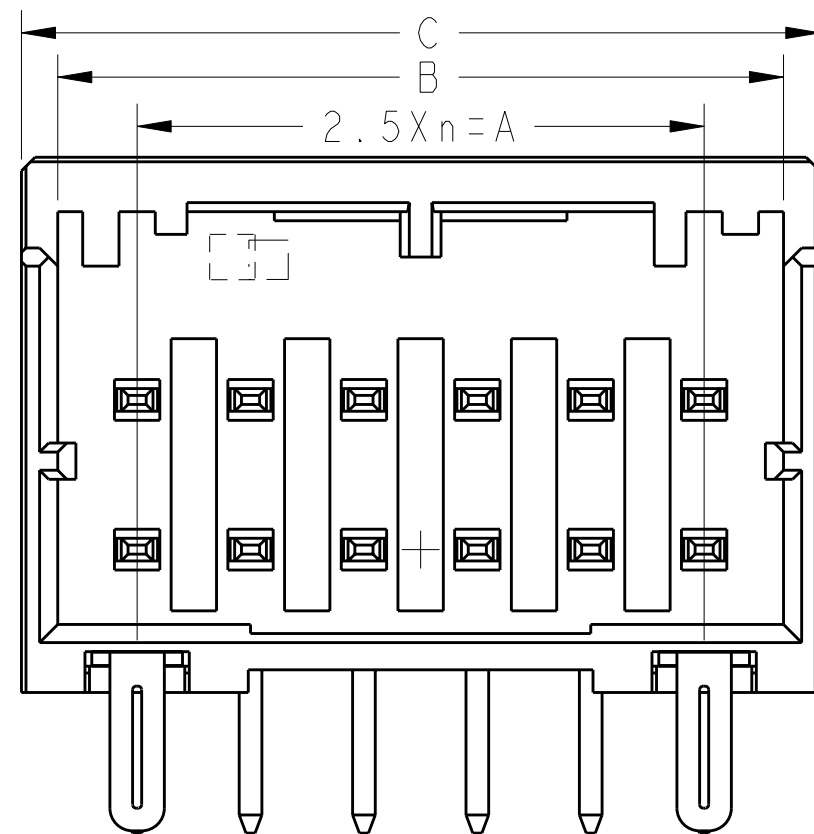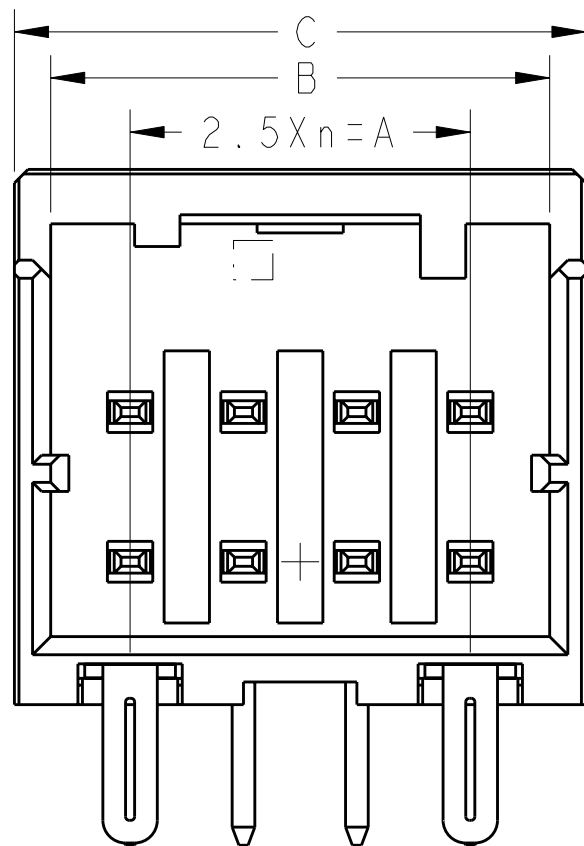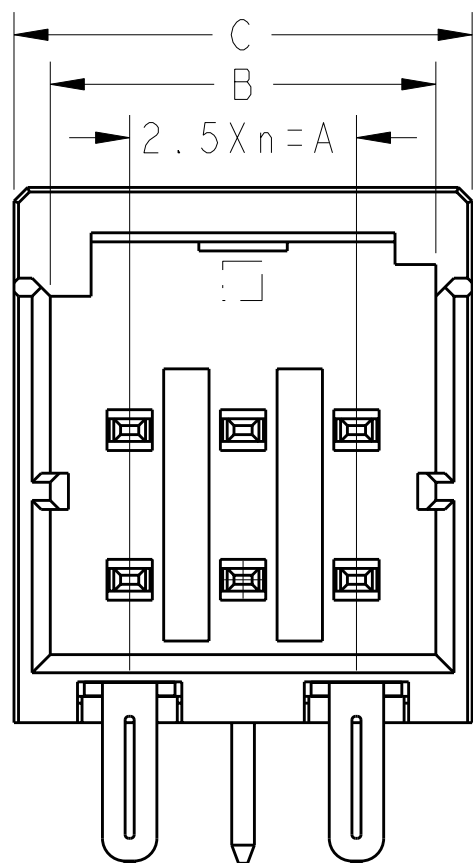

B

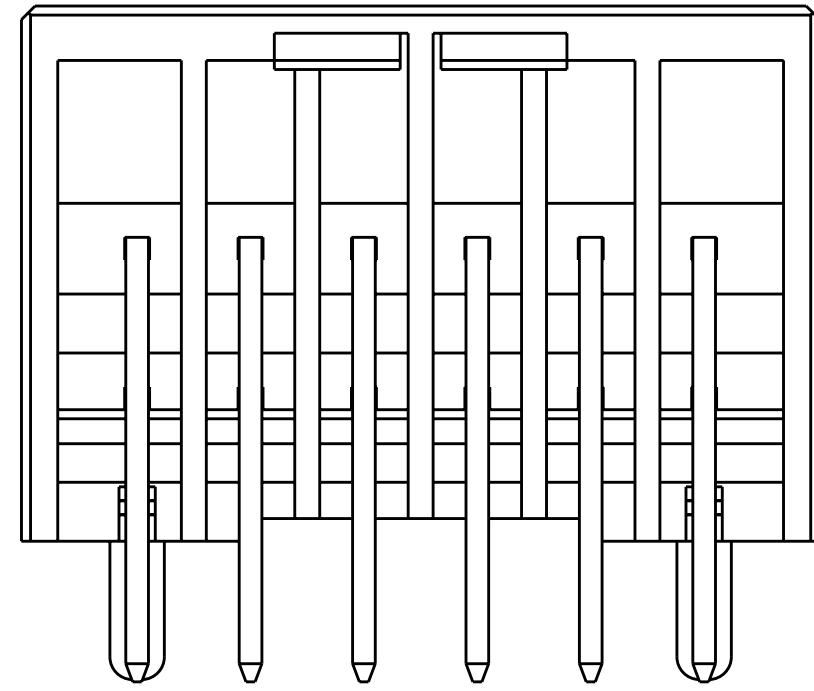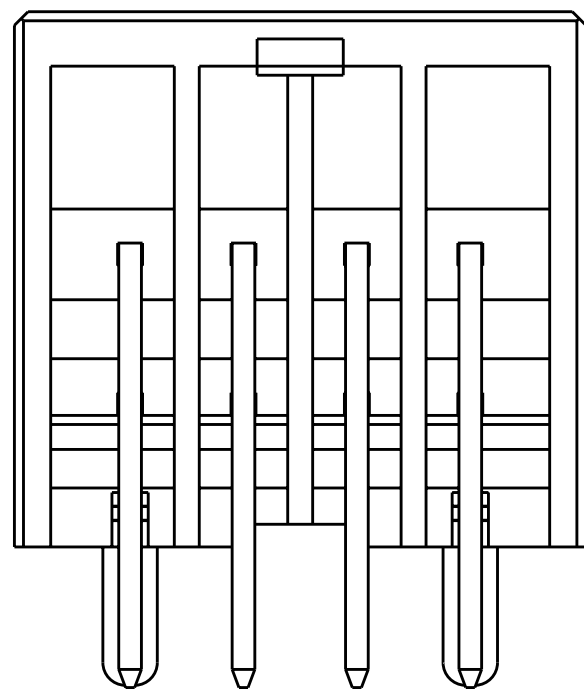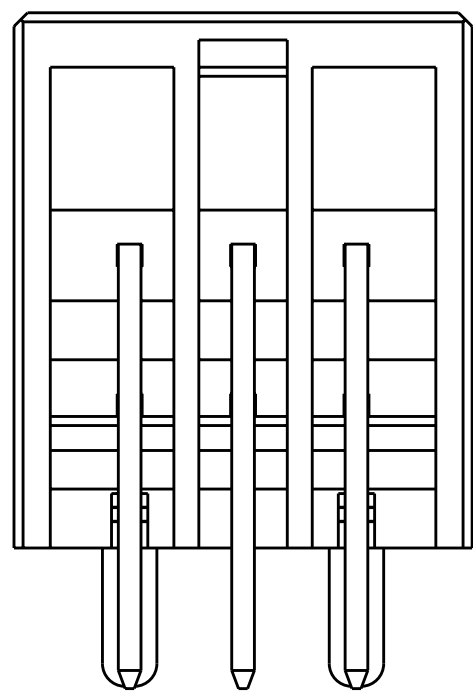

A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
T. KUDO
CHK
D. MITSUGI
APVD
D. MITSUGI

16MAR2005
14MAR2005
14MAR2005

DIMENSIONS:
mm

TO DIMENSIONS UNLESS OTHERWISE SPECIFIED:
1. PLC ±
2. PLC ±
3. PLC ±
4. PLC ±
ANGLES ±
FINISH

SEE SHEET 1 OF 3

108-78268
114-5377
-
CUSTOMER DRAWING

TE Connectivity

NAME
DYNAMIC DI200D 2.5mmPITCH
HDR ASSY (H-TYPE)
4-20POS

SIZE
A200779

CAGE CODE
C-1827876

DRAWING NO
-

RESTRICTED TO
-

SCALE
6:1

SHEET
3

OF
3

REV
C1