

# **Device Modeling Report**

COMPONENTS: Solar Cell  
PART NUMBER: : SX 3140  
MANUFACTURER: bp Solar  
REMARK:Pmax=140(W)  
REPORT of SolarCells (LTspice IV)




**Bee Technologies Inc.**

## SPICE MODEL


```
*$  
*PART NUMBER: SX 3140  
*MANUFACTURER: bp Solar  
*REMARK: Rated power (Pmax) 140W  
*All Rights Reserved Copyright (c) Bee Technologies Inc. 2009  
.SUBCKT SX3140 Plus Minus  
R_RS1 N00A Plus 126.0629m  
R_Rsh1 Minus N00A 4.6562k  
D_D1 N00A Minus DIODE_SX3140  
I_I1 Minus N00A DC 8.2  
.Model DIODE_SX3140 D  
+ IS=12.0938p  
+ N=30.4196  
+ RS=69.1117m  
+ IKF=0  
.ENDS  
*$
```

## Circuit Configuration

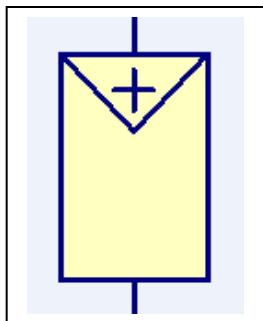


## Output Characteristic

Circuit Simulation Result

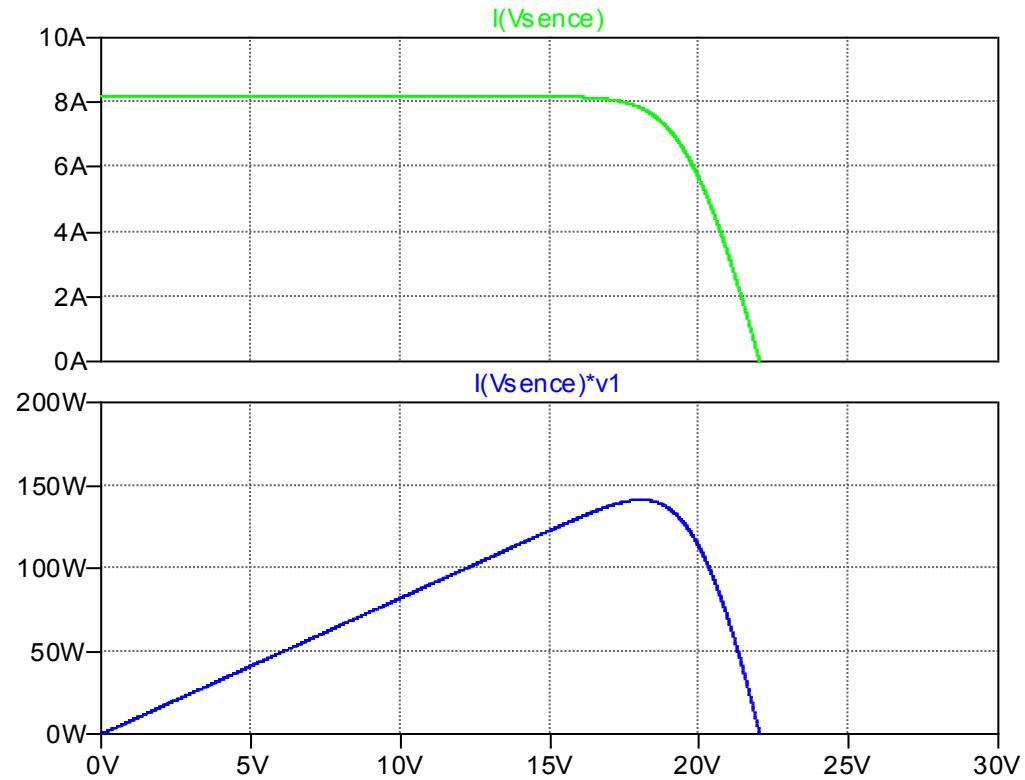


Simulation Circuit

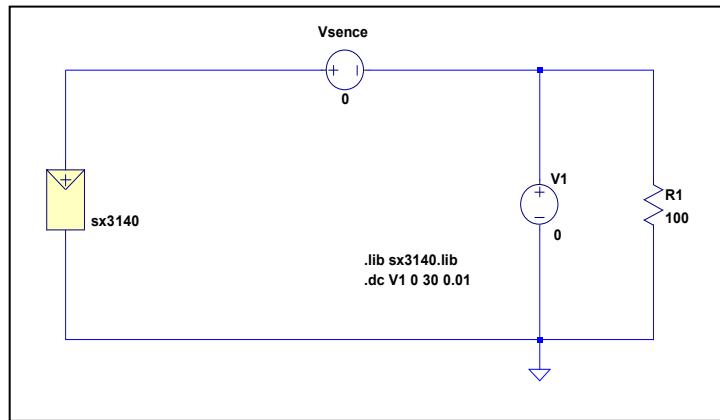

## Output Characteristic

## Reference

### Circuit Simulation Result

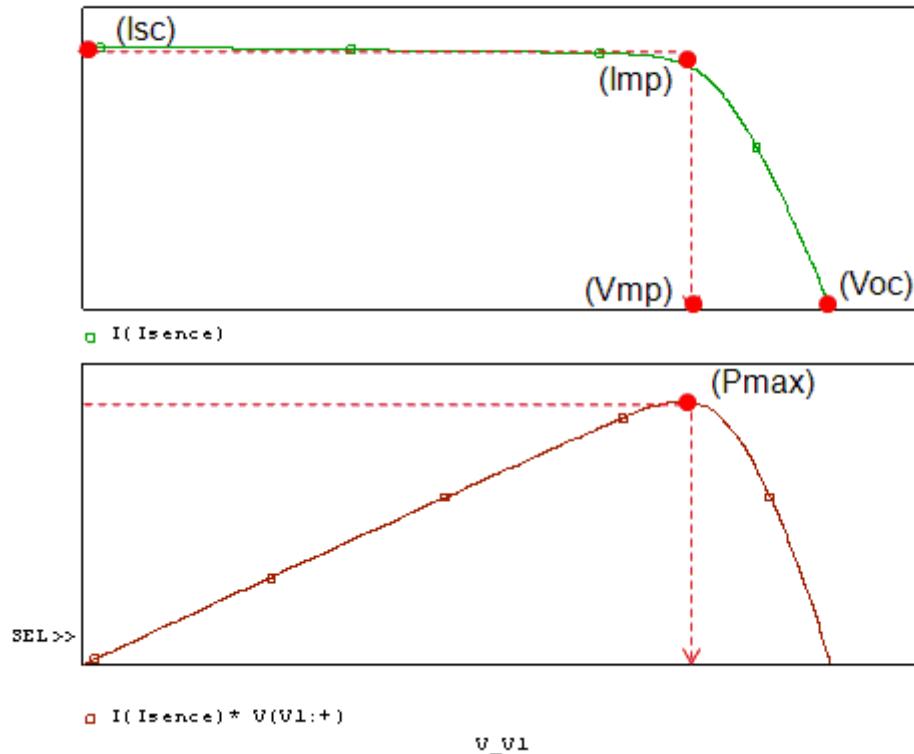

### Data Table

| Symbol                         | Measurement     | Simulation      | %Error        |
|--------------------------------|-----------------|-----------------|---------------|
| $I_{sc}$                       | <b>8.2000</b>   | <b>8.1998</b>   | <b>-0.002</b> |
| $V_{oc}$                       | <b>22.0000</b>  | <b>22.0000</b>  | <b>0.000</b>  |
| $I_{mp}$                       | <b>8.0000</b>   | <b>7.8407</b>   | <b>-1.991</b> |
| $V_{mp}$                       | <b>17.5000</b>  | <b>18.0000</b>  | <b>2.857</b>  |
| $P_{max}(I_{mp} \cdot V_{mp})$ | <b>140.0000</b> | <b>141.1330</b> | <b>0.809</b>  |

## Data Information

---

No. SX 3140

|                                    |              |
|------------------------------------|--------------|
| <b>Maximum power (Pmax)</b>        | <b>140W</b>  |
| <b>Voltage at Pmax (Vmp)</b>       | <b>17.5V</b> |
| <b>Current at Pmax (Imp)</b>       | <b>8.0A</b>  |
| <b>Short-circuit current (Isc)</b> | <b>8.2A</b>  |
| <b>Open-circuit voltage (Voc)</b>  | <b>22.0V</b> |