




By combining standard RJ-45 connection technology with the industrially-proven mini form factor, the RJ-Lnxx® Line of Industrial Ethernet Connectivity products provide a lineup designed to safeguard the integrity of your data even in the harshest manufacturing, processing or commercial settings ▲

# Physical Media

Ethernet—Sealed RJ-45

## Features

- **Environmental Sealing**
- **Vibration Resistance**
- **Secure Robust Connections**
- **Performance in Electrically Noisy Conditions**

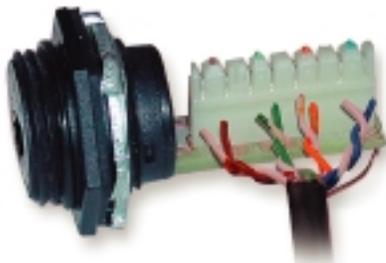


## Receptacles

The RJ-Lnxx line of receptacles offers solutions for Ethernet field device connectivity, regardless of the operating environment. All RJ-Lnxx receptacles are compatible with commercial RJ-45 connectors, enabling one solution for both harsh and benign environments ▲

### 110 Punchdown Block

Simple termination via Insulation Displacement Connections (IDC) with use of commonly available punchdown tools. Ideal for premise wiring applications ▲

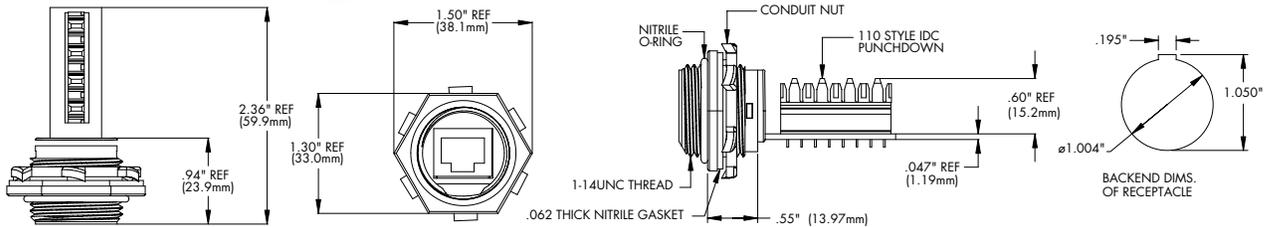


Part Number	Description
ENDR2FB5	110 receptacle, 568A and 568B wiring, back side locking nut




### Direct PCB Mount Receptacle

Short depth receptacle that solders directly to a Printed Circuit Board (PCB)—intended for OEMs who wish to incorporate a robust, sealed connection into their field equipment ▲

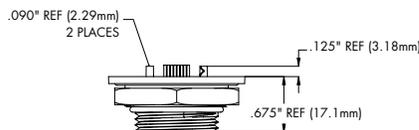

Part Number	Description
ENPR1FF5	Direct PCB mount 8 pin through hole receptacle, front coupling nut

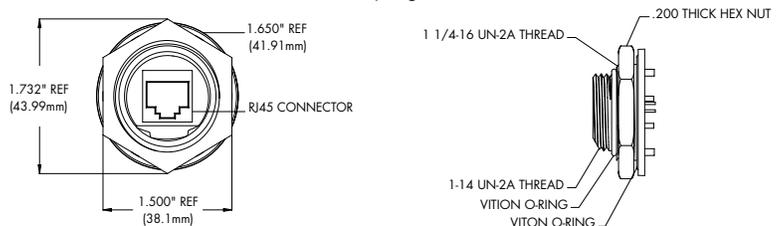

### Closure Cap

Maintains sealing integrity when a connector is not mated with the receptacle ▲

Model Number	Description
67-0300	IP67 rated closure cap with lanyard
65-0300	IP65 rated closure cap
67-0301	IP67 rated closure cap for cordset




## Receptacles (continued)

### Standard PCB Board Receptacle



Highly flexible solution that enables an OEM or end-user to solder a cable lead to an internal Ethernet connection ▲

Part Number	Description
ENSR1FB5	Receptacle with PC Board
ENSR1FB5C305	Receptacle with PCB & 12" of cable (10 Base-T)
ENSR2FB5C305	Receptacle with PCB & 12" of cable (568A)
ENSR3FB5C305	Receptacle with PCB & 12" of cable (568B)

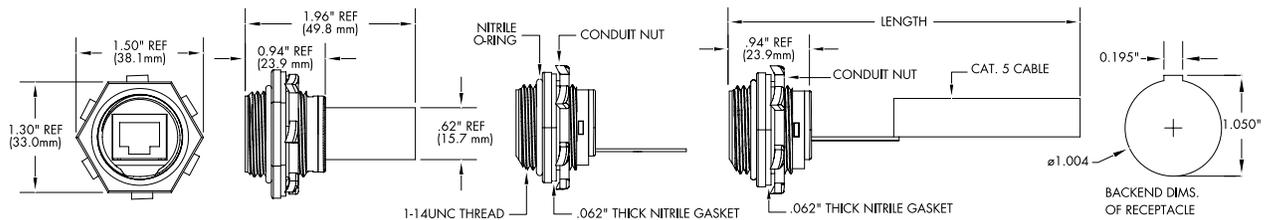


### Bulkhead Passthrough



To bring Ethernet into a cabinet or control box, simply create the sealed connection on the outside of the enclosure, and run a commercial patch cord from the backside RJ-45 jack to your PLC, I/O, or Ethernet Control Board. No conduit entry is required. UV stabilized versions for outdoor use can be ordered by adding a "V" to the end of a part number ▲

Part Number	Description
ENSP1F5	RJ-45 Bulkhead passthrough with backside jack
ENSP1F5C305	RJ-45 Bulkhead passthrough with 12" of patch cord
ENSP6F5	RJ11 Bulkhead passthrough with backside jack

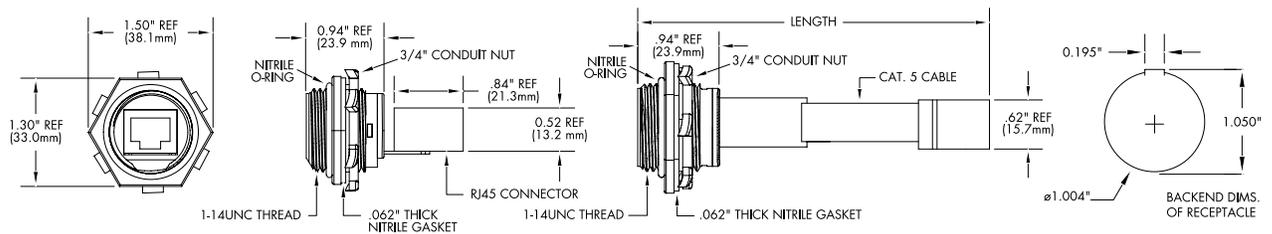

### Receptacle Specifications

**O-Ring Material** Nitrile Rubber  
**Receptacle Shell Material** Acrylonitrile-Butadiene-Styrene (ABS)—standard version, Acrylonitrile-Styrene-Acrylate (Luran™ S778 T/TE)—UV stabilized version  
**Knockout Hole for Receptacle** 1.031  
**Mating Thread** UNC 1" - 14  
**Operating Temperature** -20 to 80 C  
**Return Loss** 5 dB @ 100 MHz  
**Shock/Vibration** Per IEC 60068-2-6  
**Environmental Rating** IEC IP67

**TIA/EIA Rating**  
**110 Punchdown** Category 5e compliant  
**Bulkhead Passthrough** Category 5e compliant  
**Direct PCB Mount** Category 5 compliant  
**Standard PC Board** Not Rated—additional customer termination is required

**RJ-45 Jack**  
**Base Material** Copper alloy w/30 μ-inches gold alloy  
**Underplating** 2.54 microns of nickel  
**Mating Cycles** 250, minimum  
**Current Rating** 1.5 Amp  
**Voltage Rating** 125 VDC

# Physical Media



## Cordsets

RJ-Lnxx cordsets utilize a standard RJ-45 plug, but add strain relief and a locking mechanism that creates a seal when mated with an RJ-Lnxx receptacle. Cordsets can be ordered to length as an overmolded cordset, or as an attachable device that can be assembled in the field ▲


## Over-Molded Cordsets

Overmolded Cordsets are available in two configurations. When both cord ends are in a harsh environment, order with two industrial sealed connectors: for a cable with one end in a harsh environment, and the other in a sealed or office area, order with one industrial connector and one commercial grade plug for a better fit into a standard patch panel. Various cable types are available to best match the requirements of the applications. Solid core shielded PUR cable is used for longer "horizontal cross connection runs", while stranded PVC, is more appropriate for shorter "patch cord" applications where greater cable flexibility is desired. For extreme environmental conditions, Proplex™ cable provides a Kevlar inner wrap and an unmatched temperature range (-70 °C to 105 °C). Plugs are available in both RJ-45 and RJ-11 formats ▲



## Cordset Options

Example: ENS2135M020 = Cordset with 568A wiring, sealed industrial RJ-45 on one end, commercial RJ-45 on the other end, 2.0 meters in length.

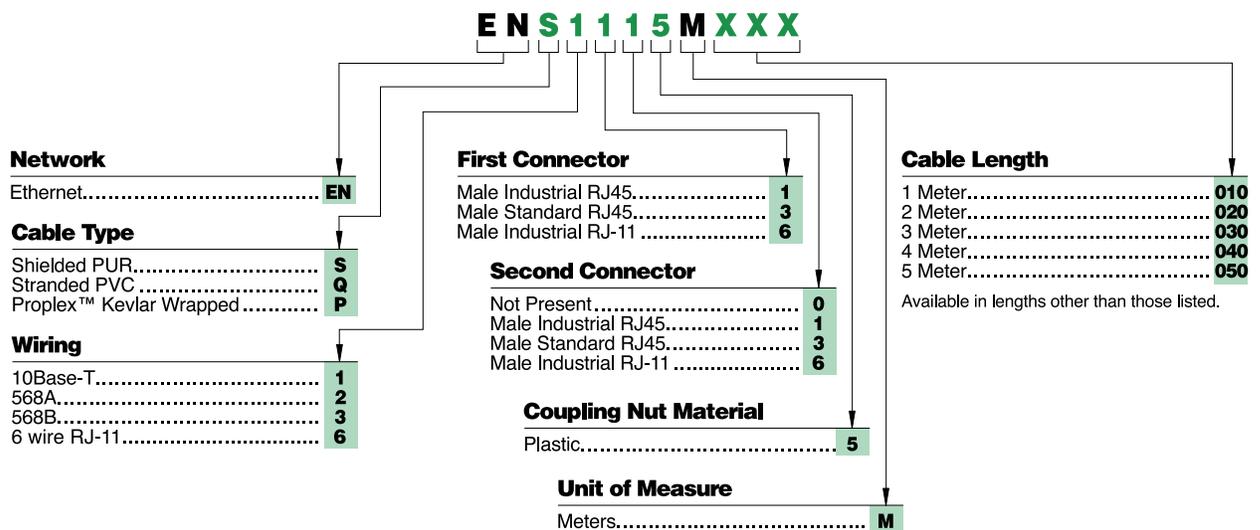


## Connector Specifications

**Insert Material** (ABS) Acrylonitrile-Butadiene-Styrene

**Overmold Material** Polyurethane (Solid Core & Proplex), PVC (Stranded)

**Coupling Nut Material** Acrylonitrile-Butadiene-Styrene (ABS)—standard version, Acrylonitrile-Styrene-Acrylate (Luran™ S778 T/TE)—UV stabilized version

**Recommended Mating Torque** 12 inch-lbs.

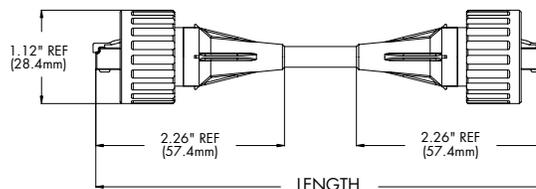

Part Number	Description
RJBG16821	Adaptor, attaches to male plug of cordset to provide a female connection


# Physical Media



## Field Attachable Connector

Assemble the connection in the field using a standard crimping tool, and still enjoy the same IP67 sealed connection as the overmolded cordset. One thousand foot bulk cable put-ups are available for both Solid Core PUR and Proplex cable. UV stabilized versions for outdoor use can be ordered by adding a "V" to the end of a part number ▲

Part Number	Description
ENSAM315	Field attachable RJ-45 connector, 2.5 - 6.5mm acceptable cable diameter
EN84-2480-3040M	304 meters (1000 feet) of solid core cable
EN84-2481-3040M	304 meters (1000 feet) of Proplex cable

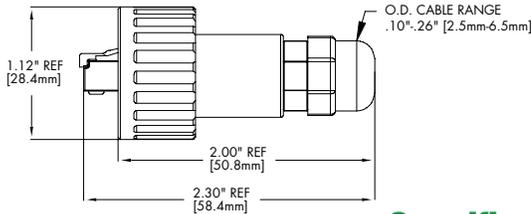

## Specifications- Solid Core Cable

### Physical

**Conductors** #24 AWG Solid Bare Copper, 0.020" (0.510 mm)  
**Insulation** 0.009" (0.229mm) of Cellular Polyethylene  
 0.04" (1.0mm) nominal diameter  
**Pair** 2 insulated conductors twisted together, lay lengths varied between pairs to minimize cross talk  
**Core** 4 pairs cabled together  
**Binder** Polyester tape, minimum 20% overlay minimum  
**Shield** Aluminum/Polyester tape, 20% overlay minimum  
**Drain Wire** #24 AWG stranded (7/32) tin plated copper  
**Jacket** Black Polyurethane 0.025" (0.635 mm) nominal thickness  
**Operating Temperature** -20 to 80 C  
**Diameter** 0.245" (6.223mm) nominal  
**Wiring Sequence** Choice of TIA/EIA 568A or 10 Base-T

### Electrical @ 20 C

**Capacitance** 5.6 nF/100 meter, maximum  
**Velocity of Propagation** 72% nominal  
**Conductor DC Resistance** 9.38Ω /100 meter, maximum  
**Impedance** 100Ω ± 15Ω  
**Delay Skew** 45 nS/100 meter, maximum  
**TIA/EIA Rating** Category 5e

Frequency (MHz)	Attenuation (db/100 M nominal)	NEXT (db nominal)
1	2.0	65.3
4	4.1	56.3
10	6.5	50.3
16	8.2	47.3
20	9.3	45.8
31.25	11.7	42.9
62.5	17.0	38.4
100	22.0	35.3

## Specifications- Stranded Cable

### Physical

**Conductors** #24 AWG Stranded Tinned Copper  
**Insulation** Polyolefin 0.037" (0.94 mm) nominal diameter  
**Pair** 2 insulated conductors twisted together, lay lengths varied between pairs to minimize cross talk  
**Core** 4 pairs cabled together  
**Binder** Polyester tape, minimum 20% overlay minimum  
**Jacket** Black PVC 0.025" (0.635 mm) nominal thickness  
**Operating Temperature** -20 to 80 C  
**Diameter** 0.220" (5.588 mm) nominal  
**Wiring Sequence** Choice of TIA/EIA 568A or 10 Base-T

### Electrical @ 20 C

**Capacitance** 15 pF/FT  
**Velocity of Propagation** 70% nominal  
**Conductor DC Resistance** 9.0Ω /100 meter, maximum  
**Impedance** 100Ω ± 15Ω  
**Delay Skew** 10 nS/100 meter typical, 25 nS/100 meter max  
**TIA/EIA Rating** Category 5e

Frequency (MHz)	Attenuation (db/100 M nominal)	NEXT (db nominal)
1	1.9	76
4	3.9	72
16	7.9	61
20	9.0	60
31.25	11.0	55
62.5	15.9	53
100	20.7	50

## Specifications- Kelvar Wrapped Cable

### Physical

**Conductors** #26 AWG Stranded Bare Copper  
**Insulation** Color coded HFFR, halogen free, 0.035" (0.90 mm) nominal diameter  
**Pair** Cabled w/Kelvar strength member and tape wrapped  
**Core** 4 pairs cabled together  
**Shield** Inner - Aluminum mylar, 100% coverage  
 Outer - Tinned copper braid, 80% coverage  
**Jacket** Black Urethane 0.059" (1.5 mm) nominal thickness  
**Operating Temperature** -70 C to 105 C  
**Diameter** 0.287" (7.3 mm) nominal  
**Wiring Sequence** Choice of TIA/EIA 568A or 10 Base-T

### Electrical @ 20 C

**Capacitance** 4.6 nF/100 meters  
**Propagation Delay** 5.2 ns/m maximum  
**Conductor DC Resistance** 15Ω /100 meter, maximum  
**Impedance** 100Ω ± 15Ω  
**Delay Skew** 20 nS/100 meter typical, 25 nS/100 meter, maximum  
**TIA/EIA Rating** Category 5

Frequency (MHz)	Attenuation (db/100 M nominal)	NEXT (db nominal)
1	3.15	62
4	6.45	53
16	12.3	44
20	13.8	42
31.25	17.7	40
62.5	25.6	35
100	33.0	32



## Specifications-

**Copper Ports** Shielded RJ-45, 10/100BaseT(x) autonegotiate  
**Fiber Port** Multi-Mode SC, 100BaseFX, 1300 nm center  
**Supply Voltage** 10 - 30 VDC  
**Operating Temp** -40 C to 85 C  
**Vibration** IEC 68-2-6  
**Hazardous Locations** UL 1604, CSA C22.2/213 (Class 1, Div. 2)  
**Electrical Safety** UL 508, CSA 22/14, CE  
**EMI Emissions** FCC part 15, Class B, CE  
**EMI Immunity** EN613216-1, CE  
**Dimensions** 4.75" (120.7 mm) x 3.17" (80.5 mm) x 1.10" (27.9 mm)

## Media Converters

While fiber optic cable is an attractive option in many "non-office" networks, due to its immunity to electrical noise and ability to traverse longer distances (2Km) than copper cable, it may not be cost effective to have all devices on the network support fiber. The RJ-Lnxx Media Converter enables a fiber backbone to be run to the industrial enclosure, providing a link to your copper network. This DIN rail mount unit provides 1 Fiber (SC) and two copper (RJ-45) ports, and is designed to withstand temperature and vibration extremes ▲

Part Number	Description
ENMC2R1S	Media Converter, 2 copper (RJ-45) ports, 1 multi-mode fiber (SC) port