

Device Modeling Report

COMPONENTS: BRT
PART NUMBER: RN1105FV
MANUFACTURER: TOSHIBA




Bee Technologies Inc.


PSpice model parameter	Model description
IS	Saturation Current
BF	Ideal Maximum Forward Beta
NF	Forward Current Emission Coefficient
VAF	Forward Early Voltage
IKF	Forward Beta Roll-off Knee Current
ISE	Non-ideal Base-Emitter Diode Saturation Current
NE	Non-ideal Base-Emitter Diode Emission Coefficient
BR	Ideal Maximum Reverse Beta
NR	Reverse Emission Coefficient
VAR	Reverse Early Voltage
IKR	Reverse Beta Roll-off Knee Current
ISC	Non-ideal Base-Collector Diode Saturation Current
NC	Non-ideal Base-Collector Diode Emission Coefficient
NK	Forward Beta Roll-off Slope Exponent
RE	Emitter Resistance
RB	Base Resistance
RC	Series Collector Resistance
CJE	Zero-bias Emitter-Base Junction Capacitance
VJE	Emitter-Base Junction Potential
MJE	Emitter-Base Junction Grading Coefficient
CJC	Zero-bias Collector-Base Junction Capacitance
VJC	Collector-base Junction Potential
MJC	Collector-base Junction Grading Coefficient
FC	Coefficient for Onset of Forward-bias Depletion Capacitance
TF	Forward Transit Time
XTF	Coefficient for TF Dependency on Vce
VTF	Voltage for TF Dependency on Vce
ITF	Current for TF Dependency on Ic
PTF	Excess Phase at $f=1/2\pi \cdot TF$
TR	Reverse Transit Time
EG	Activation Energy
XTB	Forward Beta Temperature Coefficient
XTI	Temperature Coefficient for IS

Input voltage vs. output current (ON characteristics)

Circuit simulation result

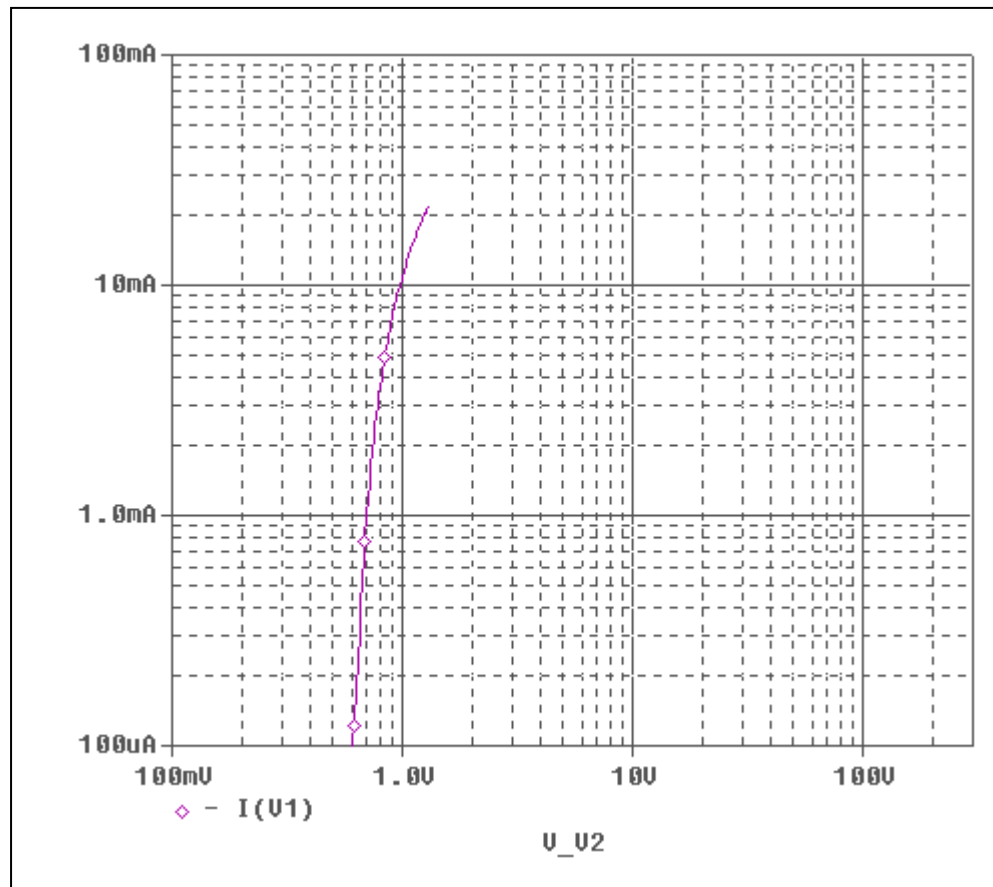


Evaluation circuit

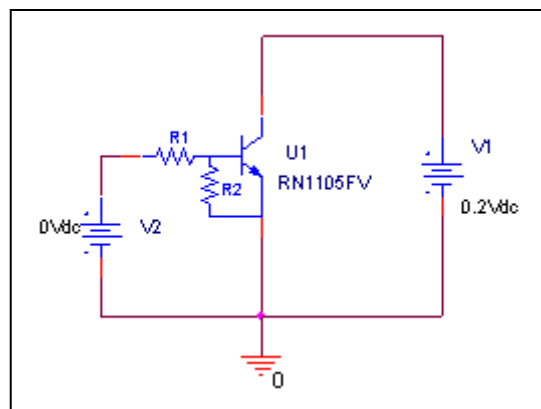

Comparison Graph

Circuit Simulation Result

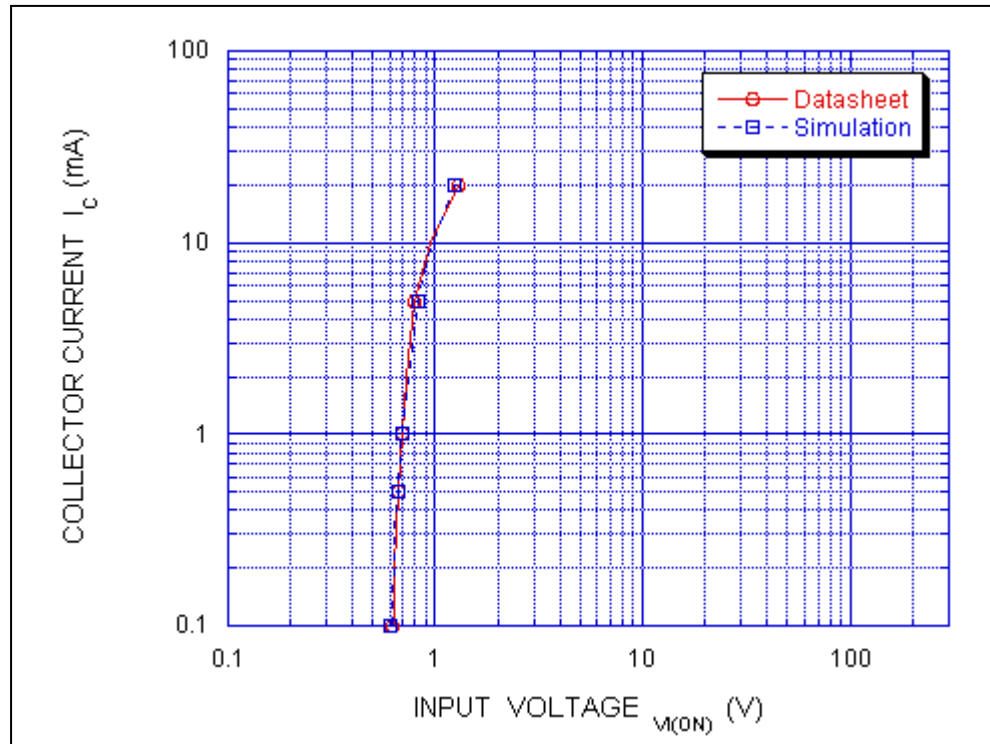


Simulation Result

Condition @ $V_{ce} = 0.2 \text{ V}$


$I_c(\text{mA})$	$V_{I(ON)} (\text{V})$		Error (%)
	Datasheet	Simulation	
0.1	0.62	0.611178	-1.42290
0.2	0.64	0.633882	-0.95594
0.5	0.67	0.667807	-0.32731
1	0.7	0.699585	-0.05929
2	0.73	0.742505	1.71301
5	0.8	0.836617	4.57713
10	0.94	0.966532	2.82255
20	1.3	1.2405	-4.57692

Output current vs. input voltage (OFF characteristics)

Circuit simulation result

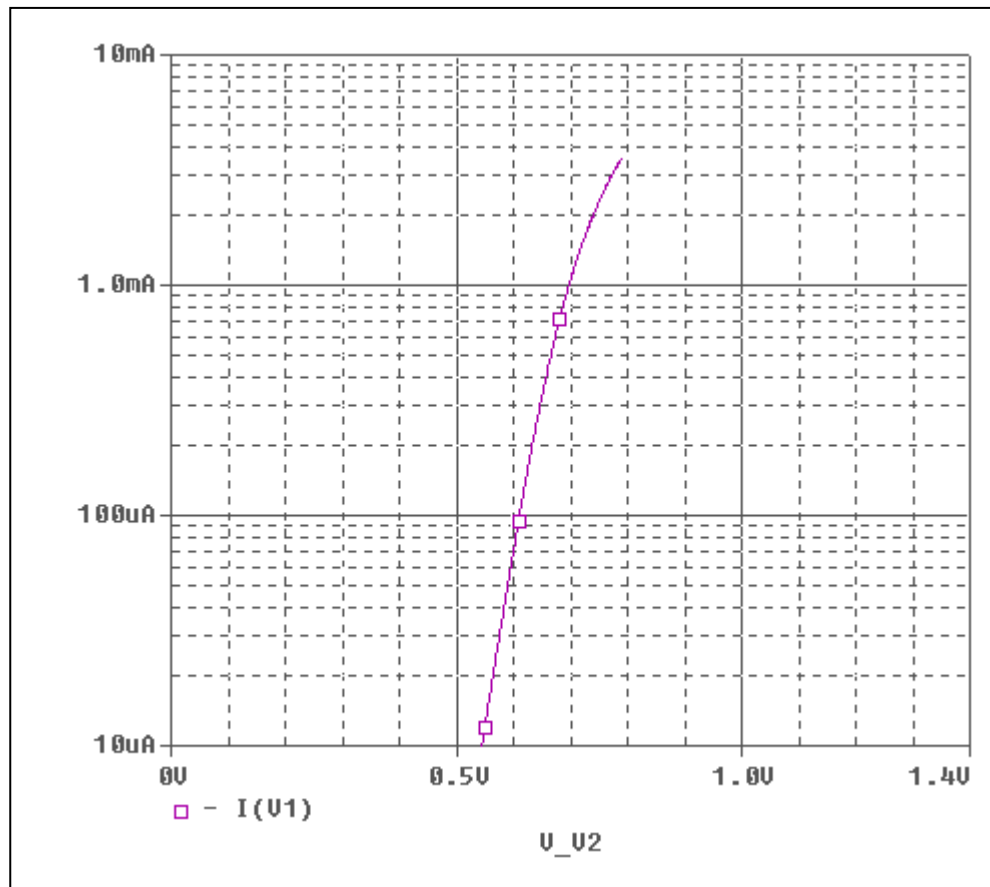


Evaluation circuit

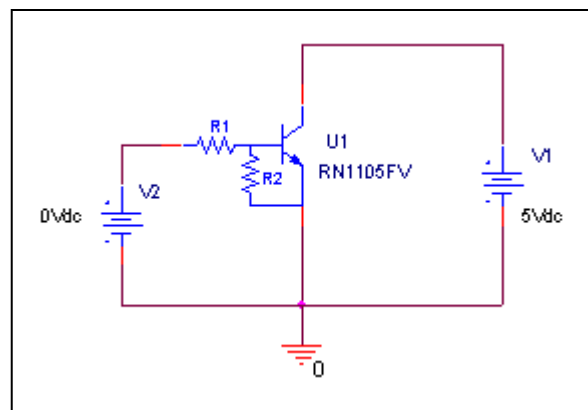

Comparison Graph

Circuit Simulation Result

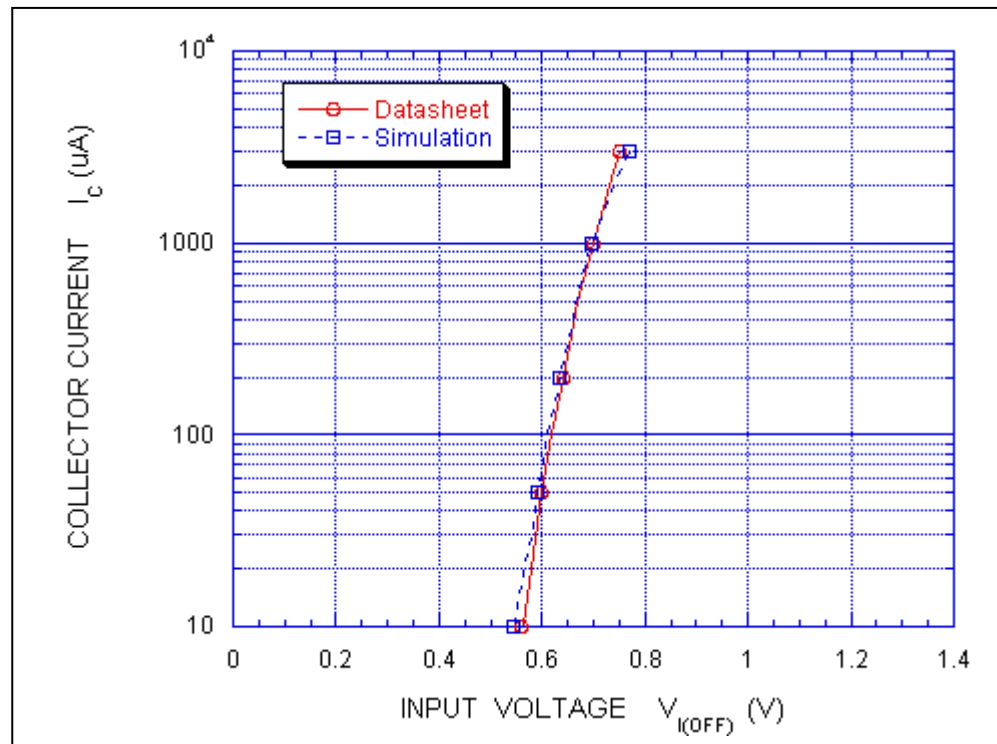


Simulation Result

Condition @ $V_{ce} = 5\text{ V}$


Ic(μ A)	$V_{I(OFF)}$ (V)		Error (%)
	Datasheet	Simulation	
10	0.56	0.544063	-2.84589
20	0.58	0.563593	-2.82879
50	0.6	0.589714	-1.71433
100	0.62	0.610026	-1.60871
200	0.64	0.632258	-1.20969
500	0.67	0.665024	-0.74269
1000	0.7	0.69774	-0.32286
2000	0.73	0.738710	1.19315
3000	0.75	0.770968	2.79573

DC current gain vs. output current

Circuit simulation result

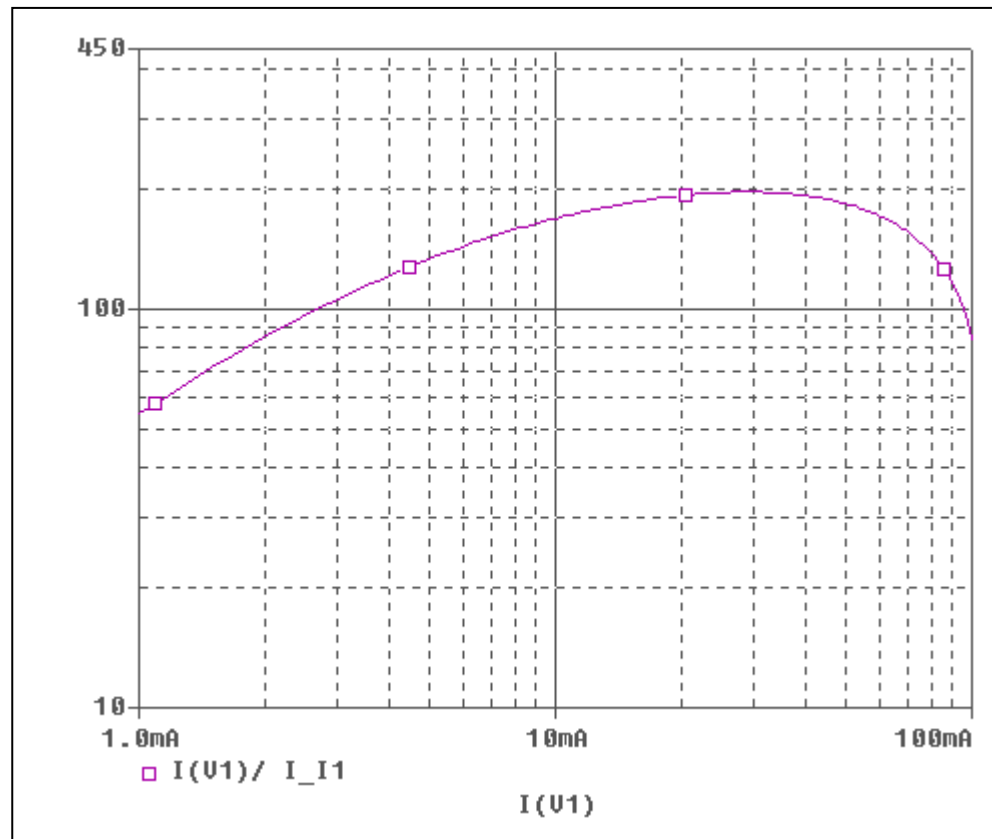


Evaluation circuit

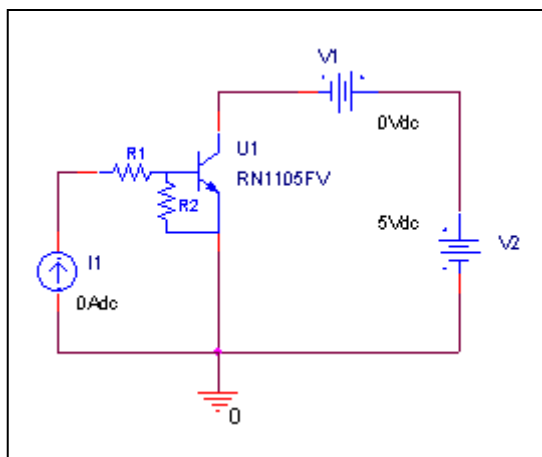

Comparison Graph

Circuit Simulation Result

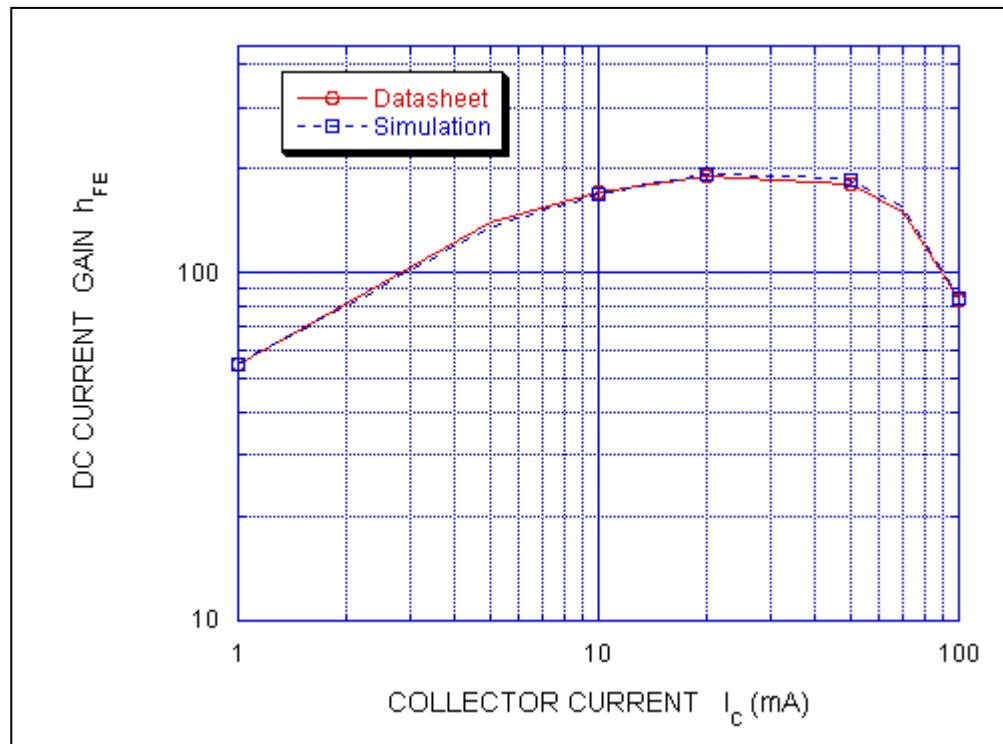


Simulation Result

Condition @ $V_{ce} = 5\text{ V}$


$I_C(\text{mA})$	hFE		Error (%)
	Datasheet	Simulation	
1	55	54.601	-0.72545
5	140	134.119	-4.20071
10	170	169.172	-0.48706
20	190	193.018	1.58842
50	180	184.011	2.22833
70	150	156.321	4.21400
100	83	84.562	1.88193

Output voltage VS. output current

Circuit simulation result

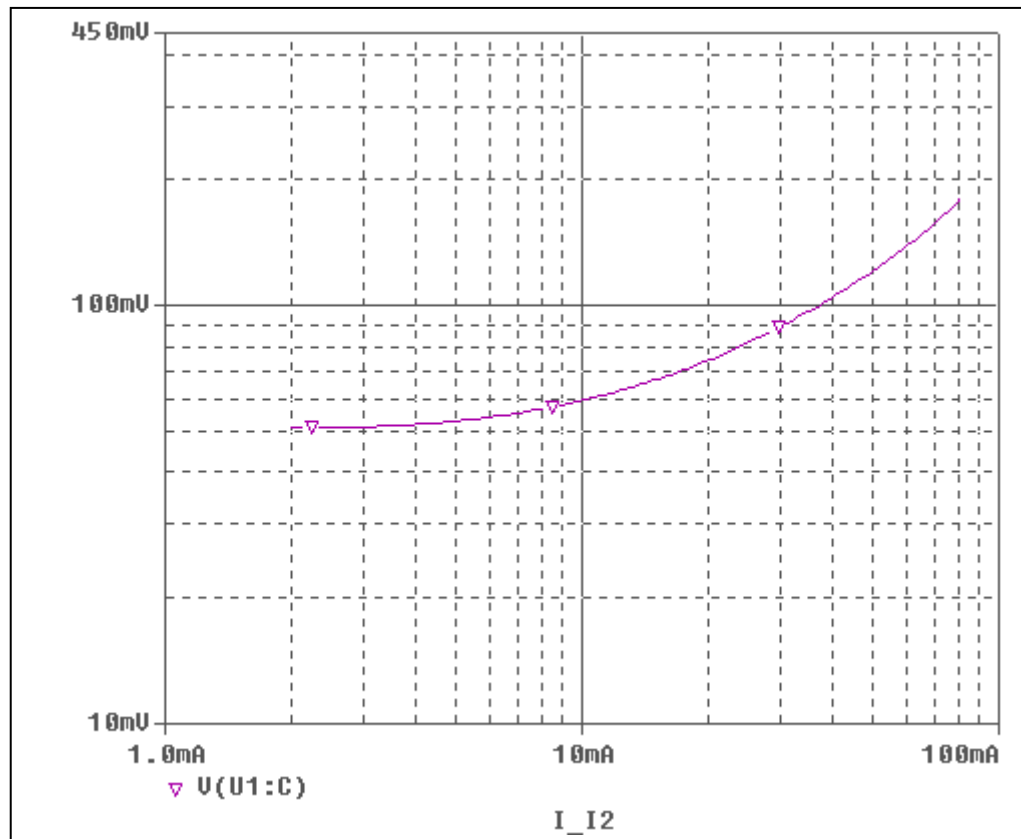


Evaluation circuit

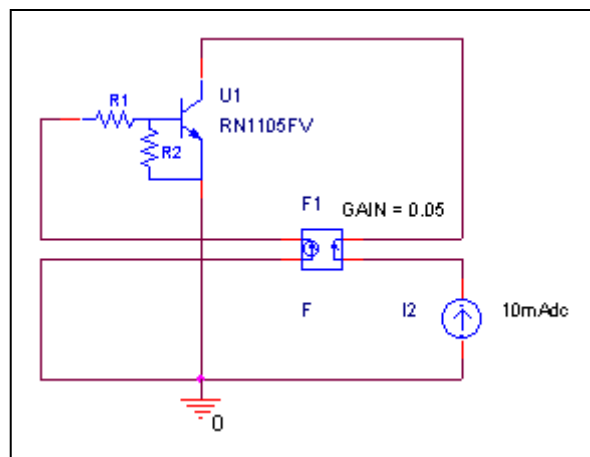

Comparison Graph

Circuit Simulation Result

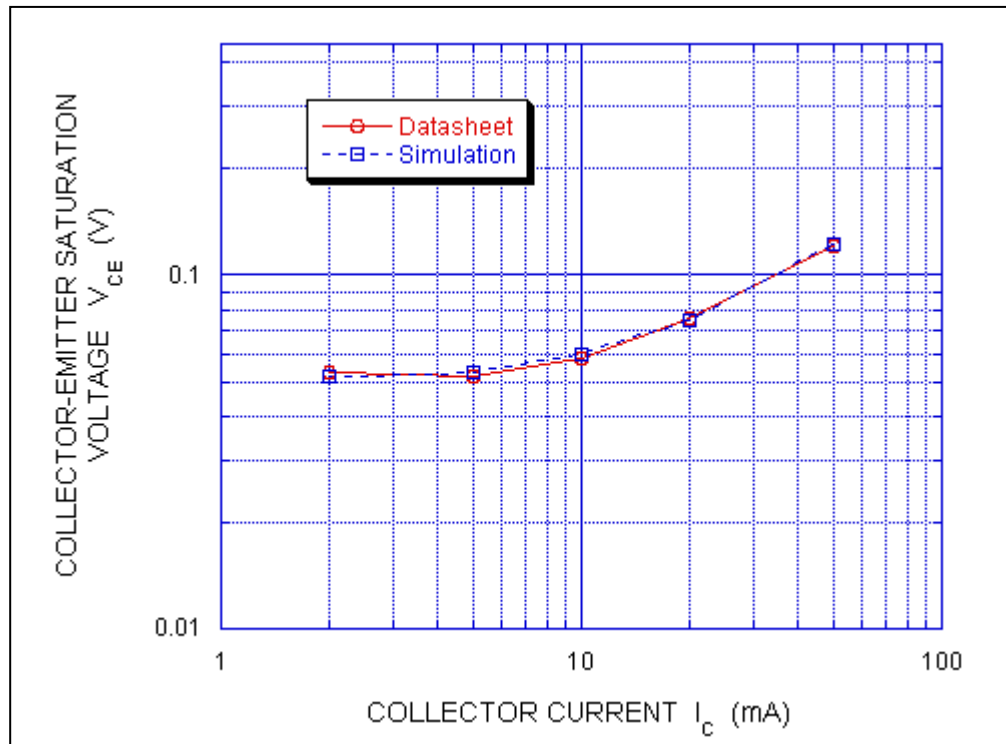

Simulation Result

Condition @ $I_C/I_B = 20$

Ic(mA)	V _{CE} (sat)		Error (%)
	Datasheet	Simulation	
2	0.053	0.051390	-3.03774
5	0.052	0.053061	2.04038
10	0.058	0.059486	2.56207
20	0.075	0.074091	-1.21200
50	0.12	0.121747	1.45583
80	0.18	0.179744	-0.14222