

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00		A1	REVISED PER ECO-11-004835	11MAR11	RK	HMR

- 1

PLUG ACCEPTS 22 DF PIN CONTACTS. CONTACTS MUST BE PURACHASED SEPARATELY.
- 2

ALL PARTS SHIPPED UNASSEMBLED, EACH PART INDIVIDUALLY BULK PACKED.
- 3

FLAME RETARDANT 94V-O RATED, STYRENE POLYOLEFIN OR PVC, BLACK.
- 4



MATERIAL:
INSERT: FLAME RETARDANT 94V-O RATED, GLASS FILLED NYLON OR POLYESTER, BLACK.
- 5

MATERIAL:
SHELL & SHIELD: CARBON STEEL.
- 6

FINISH:
SHELL & SHIEL: .000200 MIN. TIN PLATE OVER .000100 MIN COPPER UNDERPLATE.
- 7

FINISH:
JACKSCREW: ZINC PHOSPHATE COATING, BLACK.
- 8

MATERIAL:
JACKSCREW: ZINC ALLOY.

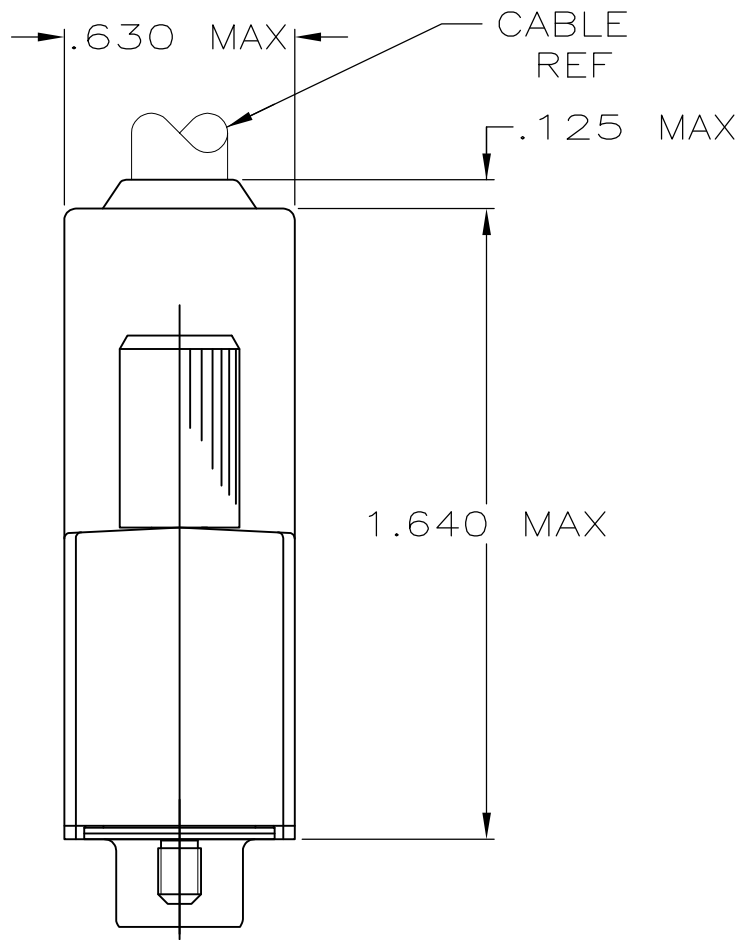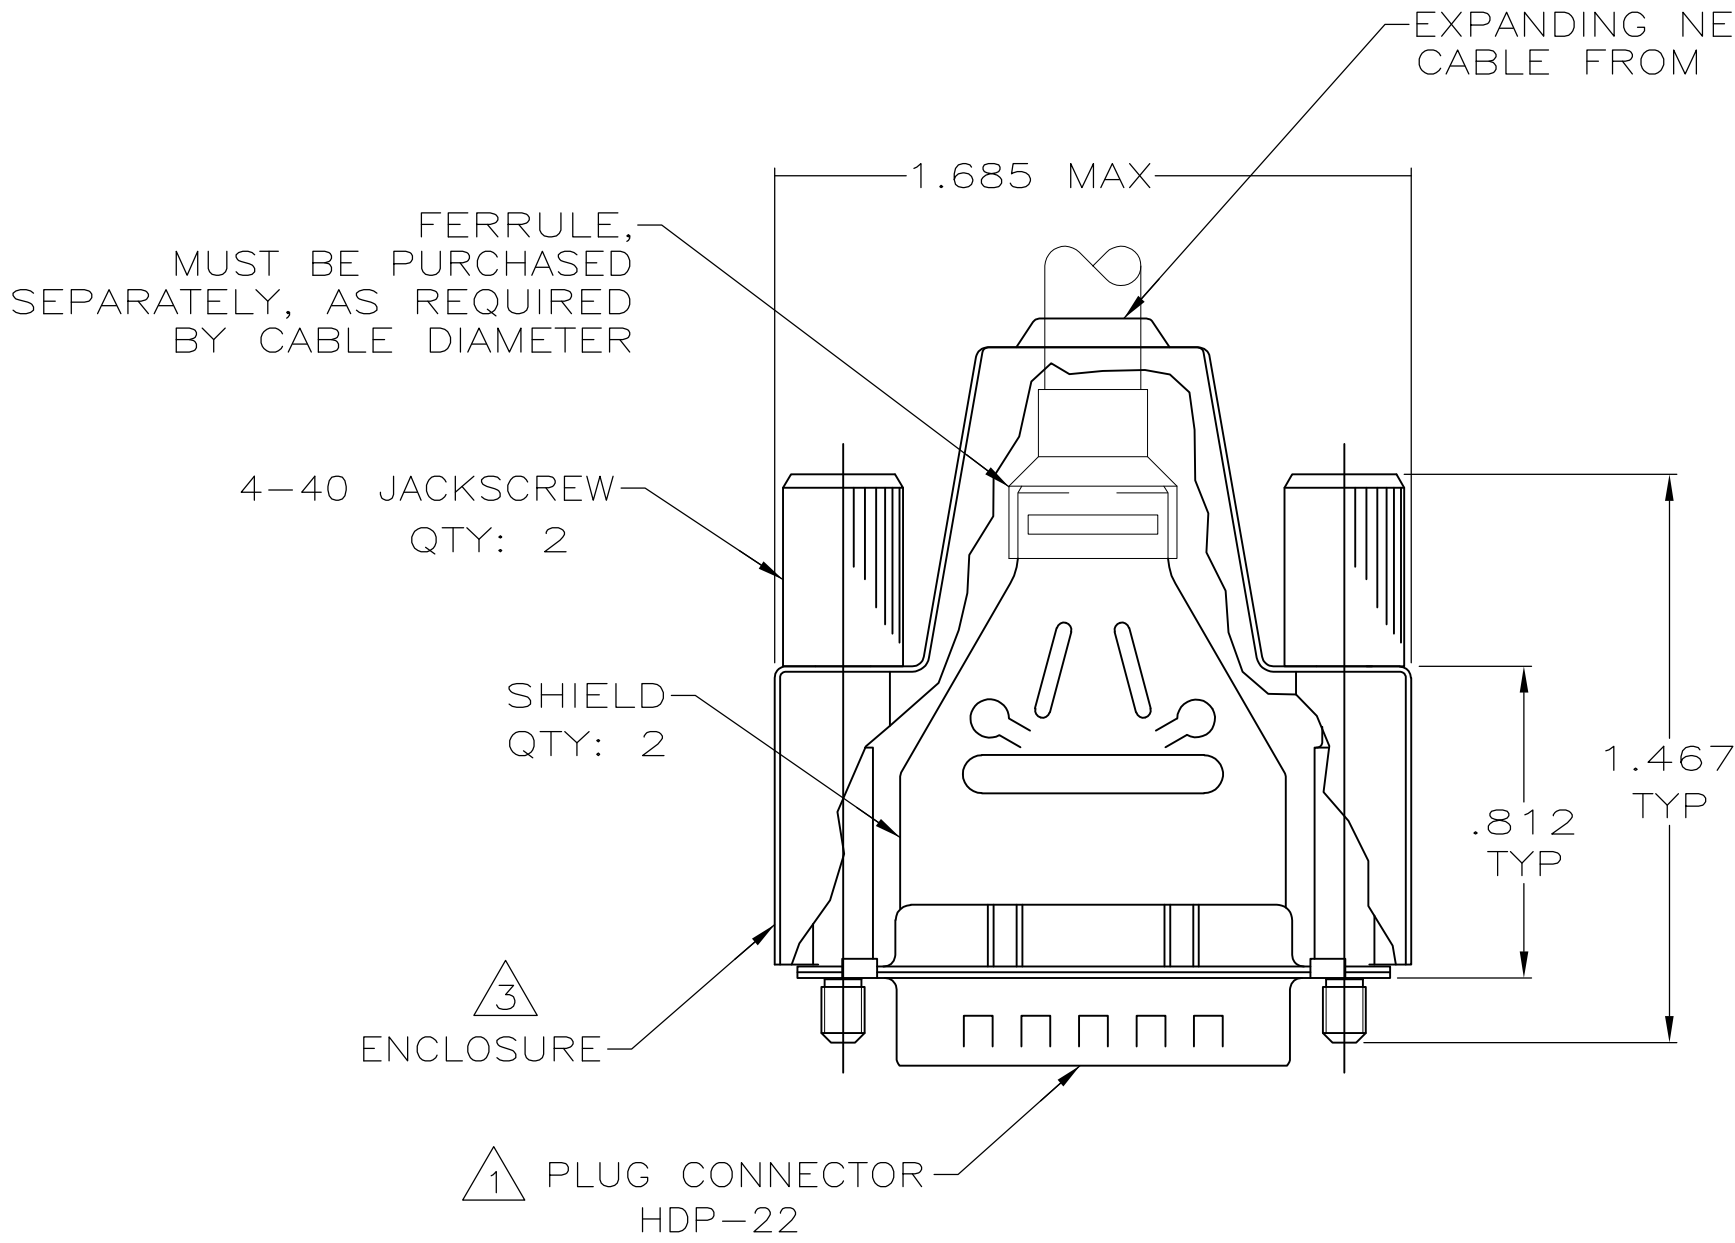

1658679-1

PART
NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	L. BAUM	02JAN04	TE Connectivity		
		CHK	S. BOLASH	02JAN04			
DIMENSIONS: INCHES		APVD	M. WALMSLEY	02JAN04	NAME SHIELDING ENCLOSURE KIT, PLUG, SIZE 2, 26 POSN, HDP-22, AMPLIMITE™		
		PRODUCT SPEC	108-1268				
		APPLICATION SPEC	114-10001		SIZE	CAGE CODE	DRAWING NO
		TOLERANCES UNLESS OTHERWISE SPECIFIED:			A2	00779	C=1658679
MATERIAL		FINISH			WEIGHT		RESTRICTED TO
CUSTOMER DRAWING					SCALE	2:1	SHEET 1 of 1
							REV A1