

Device Modeling Report


COMPONENTS : CMOS DIGITAL INTEGRATED CIRCUIT
PART NUMBER : TC7W00F
MANUFACTURER : TOSHIBA




Bee Technologies Inc.

Truth Table

Circuit simulation result

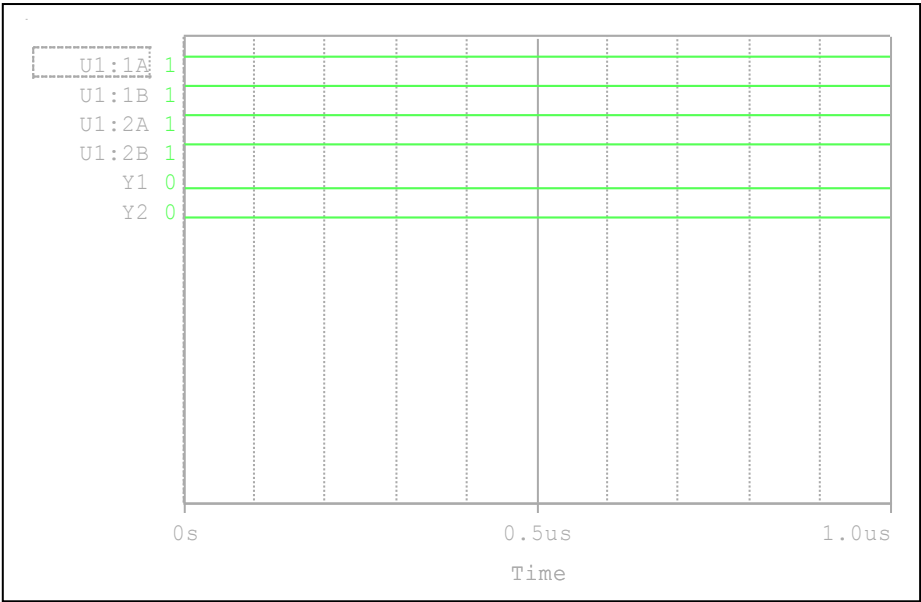

Evaluation circuit

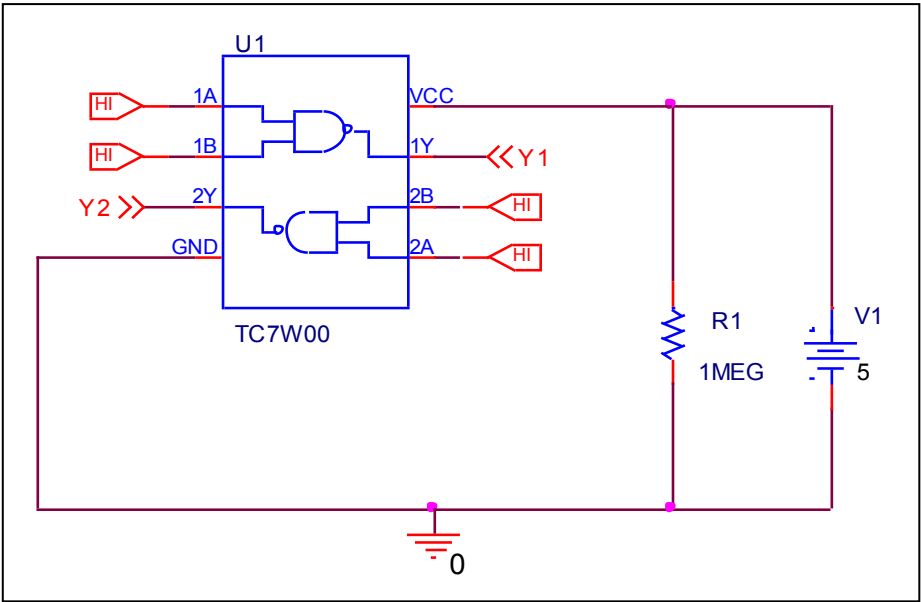


Comparison table


Input		Output		%Error
An	Bn	Yn (Measurement)	Yn (Simulation)	
H	H	L	L	0

High Level and Low Level Input Voltage

Circuit simulation result

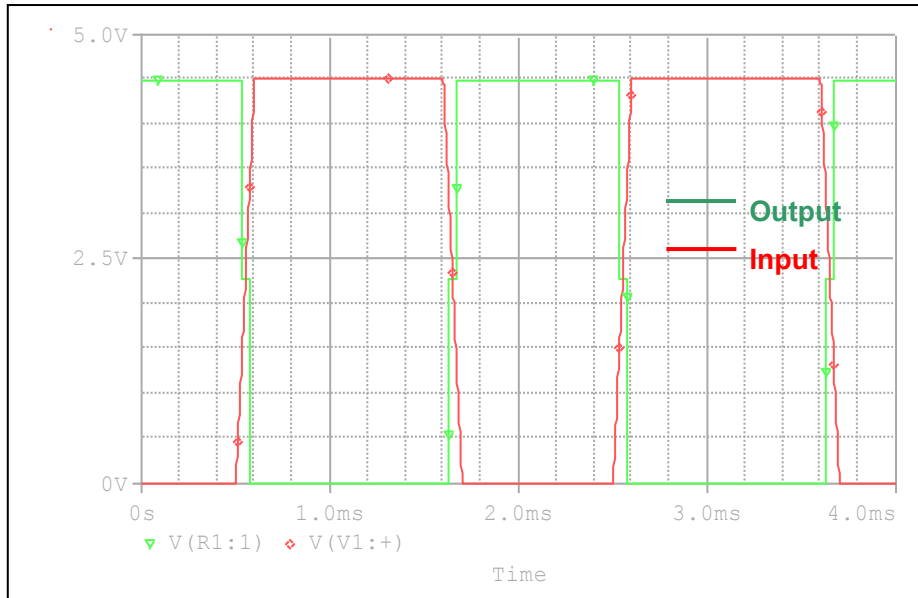

Evaluation circuit

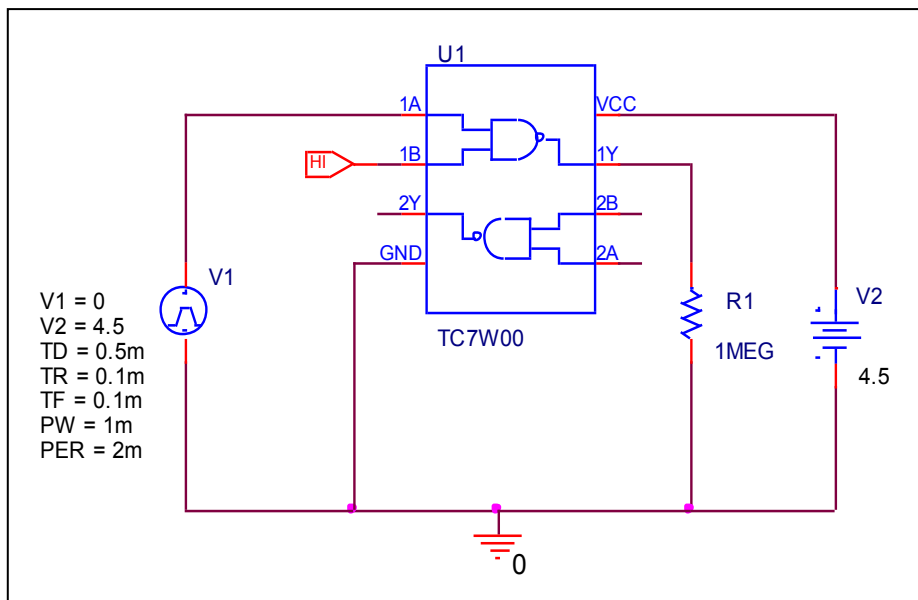


Comparison table


V _{CC} = 4.5V	Measurement	Simulation	%Error
V _{IH} (V)	3.15	3.2182	2.165
V _{IL} (V)	1.35	1.3411	-0.659

High Level and Low Level Output Voltage

Circuit simulation result

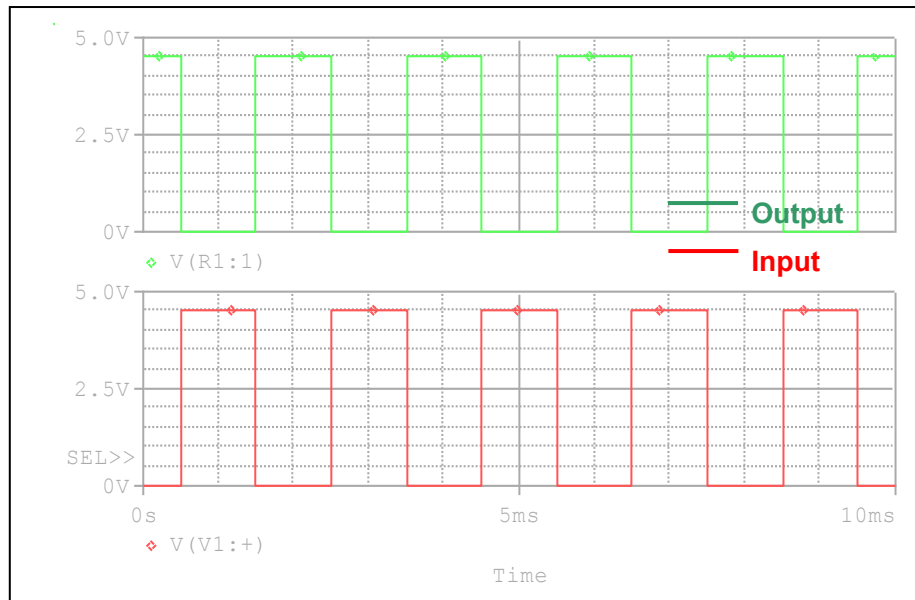

Evaluation circuit

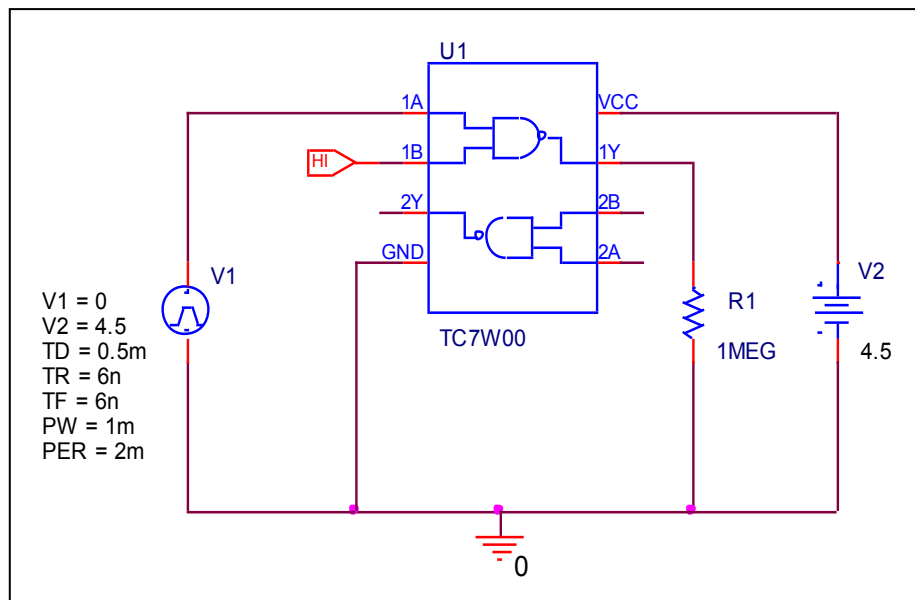


Comparison table


$V_{CC} = 4.5V$	Measurement	Simulation	%Error
$V_{OH} (V)$	4.5	4.4975	-0.056
$V_{OL} (V)$	0	0	0

Propagation Delay Time

Circuit simulation result

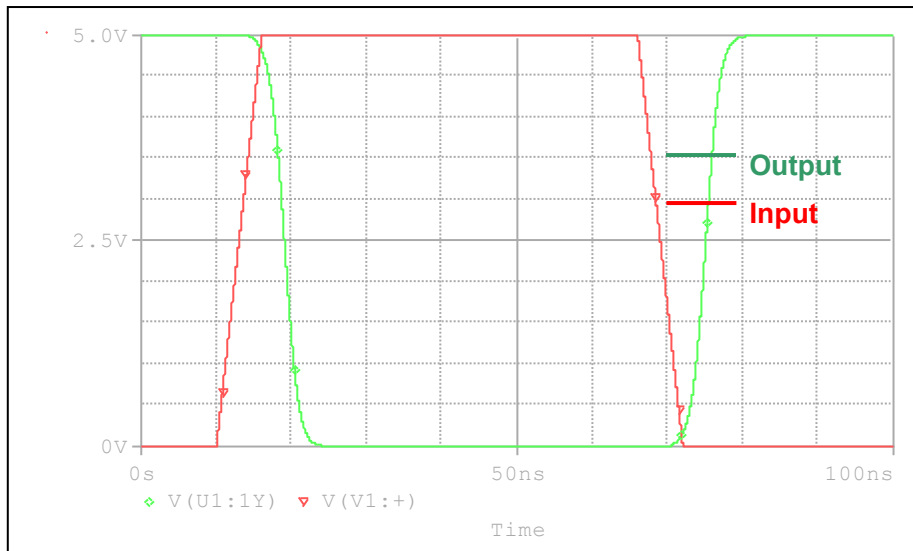

Evaluation circuit

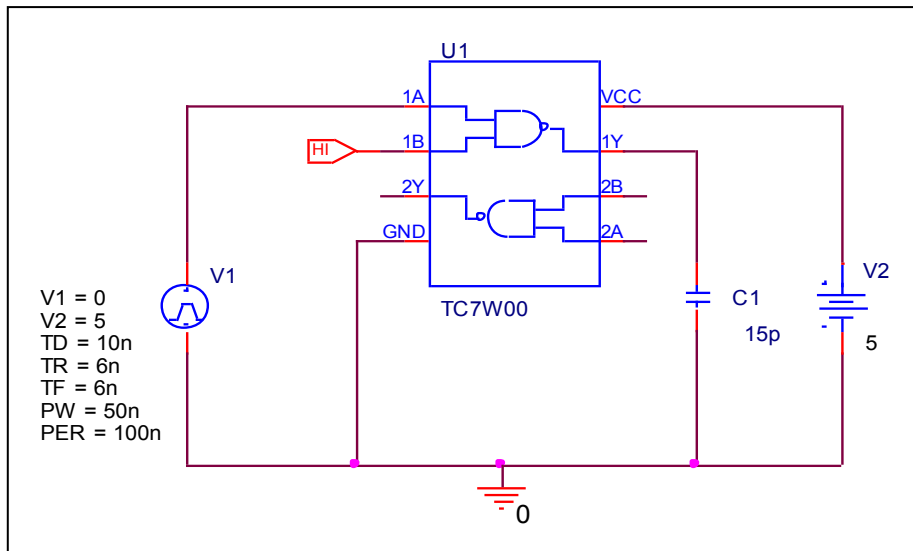

Comparison table

$C_L=15\text{pF}, V_{CC}= 5\text{V}, t_r=t_f=6\text{ns}$	Measurement	Simulation	%Error
$t_{TLH} \text{ (ns)}$	4	4.0014	0.035
$t_{THL} \text{ (ns)}$	4	4.0168	0.420
$T_{pLH} \text{ (ns)}$	6	6.0592	0.987
$T_{pHL} \text{ (ns)}$	6	6.0420	0.700