


NUMBER C-170043




METRIC




DIMENSIONS IN MILLIMETERS. DO NOT SCALE PRINT

PRINT DIST


AMP-J
REV. 10/83

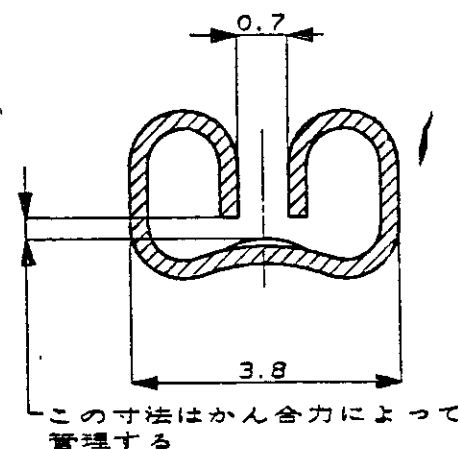

断面 A-A
(尺度10-1)

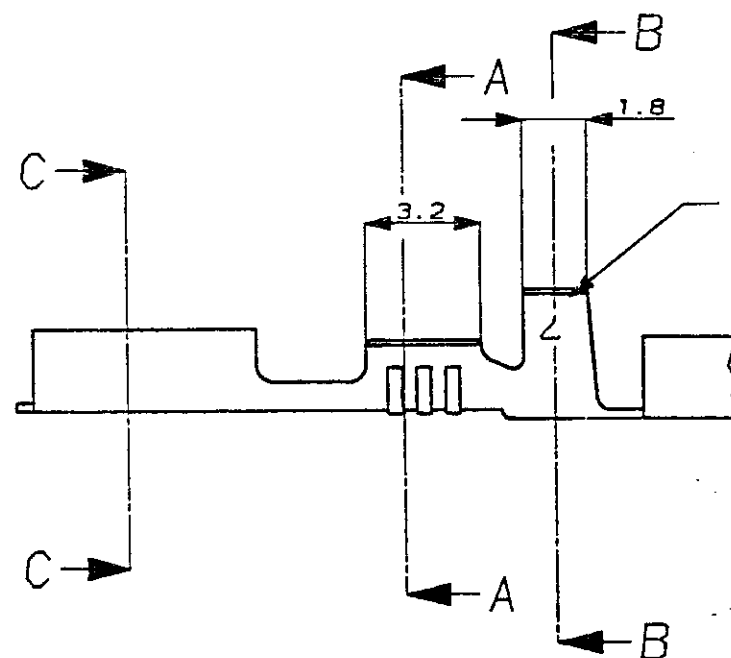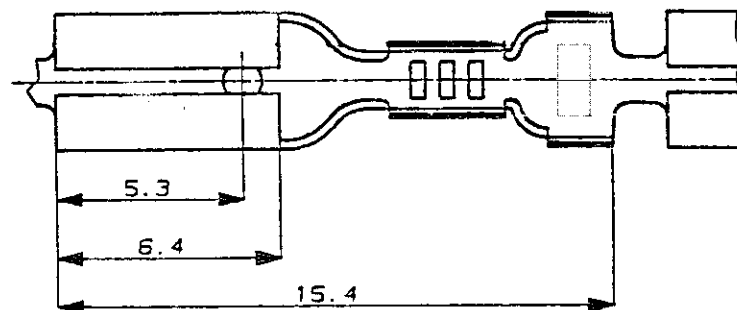

断面 A-A
(尺度10-1)

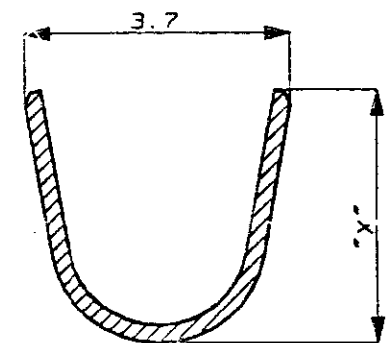

断面 B-B
(尺度10-1)

注記

- 1 製品規格NO. 108-5002
- 2 かん合するファストンタブの詳細は CP063-045Jの図面を参照の事

3.3	0.5t	170048-7	錫メッキ	リン青銅 0.25t	170043-7
3.6	0.8t	—	錫メッキ	黄銅 0.25t	170056-4
↑	0.8t	—	—	—	↑ -3
↓	0.7t	—	錫メッキ	—	↓ -2
↓	0.7t	—	—	—	170056-1
3.6	0.5t	—	錫メッキ	—	1-170043-2
3.3	↑	170043-6	錫メッキ	黄銅 0.25t	↑ -6
3.6	↑	170048-5	—	錫メッキ 黄銅 0.25t	↑ -5
↑	↓	170048-4	錫メッキ	リン青銅 0.25t	↑ -4
↓	↓	170048-2	錫メッキ	黄銅 0.25t	↓ -2
3.6	0.5t	170048-1	—	黄銅 0.25t	170043-1
"X"寸法		かん合端子 タブ厚 (±0.025)	パラ状端子型番 (レベルはプリクリン)	仕上	材料

© 1986 BY AMP (Japan) LTD. ALL RIGHTS RESERVED. AMP PRODUCTS COVERED BY PATENTS AND OR PATENTS PENDING				Tyco Electronics Corporation Kawasaki, Japan			
WIRE RANGE		INSULATION DIA		NAME (.110 SERIES FASTON RECEPTACLE)			
0.20-0.55 (AWG#24-20)		2.0-3.0 mmφ		.110シリーズファストンリセプタクル			
H 変更 ECR-08-019044		J.S. S.M. 81 JUL 08		材料 表参照		仕上げ 表参照	
G 変更 (-7追加) J-10410		1000 5/88		DR. H. B. Kuroki 9/1/86		DE. H. B. Kuroki 9/1/86	
F 変更 (パラ状型番-6.320)		11/20 10/86		CHK. H. B. Kuroki 11/20/86		APP. 2/1/86	
E 再作成 (J-9521)		11/13 1/86		LTR REVISION RECORD		DR CHK DATE	
SIZE A3		LOC J		NUMBER C-170043		SHEET 1 OF 1	
SCALE 5-1		REV. H		SHEET 1 OF 1			

CUSTOMER DRAWING