


- △[-X-] 面から2mmの範囲で測定
- 2. 嵌合相手ハジシング型 174515, 174516
- 3. 推奨取付ねじ: JIS B1115, B1112 タッピンねじ, なべ2種
呼び径3, 長さ6mm以下 (締付けトルク: 39N・cm (4kgf・cm) 以下)
- 4. 適用製品規格番号: 108-5280

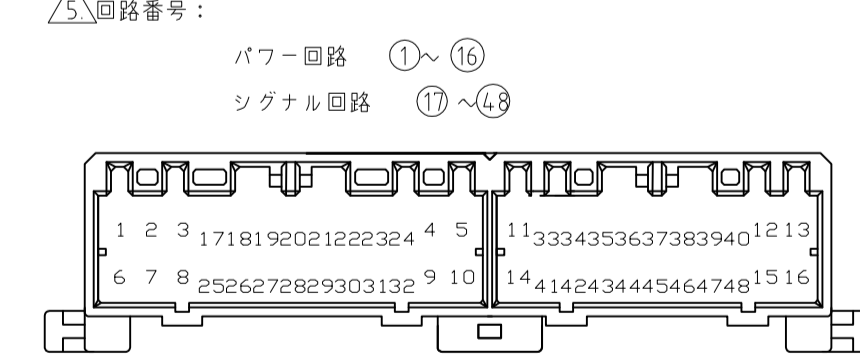

△ 適用製品型番のアプレフィックス及びIDマークを
カラーホットマークにて表示

- △ MUST BE KEPT BETWEEN [-X-] AND 2
- 2. THE MATING PLUG HSG PART NUMBER, 174515, 174516
- 3. RECOMMENDED MOUNTING SCREW, 3mm DIA, 6mm LENGTH (MAX.)
PAN HEAD, CLASS 2 TAPPING SCREW SPECIFIED IN JIS B1115, B1122
(TIGHTENING TORQUE, 39.2N・cm (4kgf・cm) MAX.)
- 4. APPLICABLE PRODUCT SPEC NO.: 108-5280
- △ CIRCUIT NUMBER
POWER CIRCUIT NO. ①~⑩
SIGNAL CIRCUIT NO. ⑪~⑬
- △ INDICATED PREFIX AND ID MARK OF PRODUCT P/N BY COLOR HOT MARK

PLC NO.	PLC TYPE	CONTACT SIDE	POWER CIRCUIT NO.	SIGNAL CIRCUIT NO.	COLOR	PART NUMBER
59	SELECTIVE-TIN (MATTE)	SELECTIVE GOLD × 8	-	19, 20, 27~31, 36	GRAY	9-5174917-6
55	SELECTIVE-TIN (MATTE)	SELECTIVE-TIN (BRIGHT) × 4.0	-	33~40	YELLOW	5-5174917-7
52	SELECTIVE-TIN (MATTE)	SELECTIVE-TIN (BRIGHT) × 4.0	-	18~24, 27~32, 36, 44	YELLOW	2-5174917-7
9	TIN-LEAD	SELECTIVE GOLD × 8	-	19, 20, 27~31, 36	GRAY	9-174917-6
8	TIN-LEAD	PRE-TIN × 10	-	19, 20, 22, 28~32, 36, 44	GRAY	8-174917-6
7	TIN-LEAD	PRE-TIN × 38	-	19, 20, 27, 28, 36	GRAY	7-174917-6
6	TIN-LEAD	SELECTIVE GOLD × 5	-	21~23, 28~31	YELLOW	6-174917-7
6	TIN-LEAD	PRE-TIN × 4.1	-	33~40	YELLOW	5-174917-7
5	TIN-LEAD	SELECTIVE GOLD × 7	-	21~23, 28~31	YELLOW	6-174917-7
5	TIN-LEAD	PRE-TIN × 4.1	-	33~40	YELLOW	5-174917-7
4	TIN-LEAD	SELECTIVE GOLD × 8	-	33~40, 41~48	YELLOW	4-174917-7
4	TIN-LEAD	PRE-TIN × 4.0	-	33~40	YELLOW	5-174917-7
3	TIN-LEAD	SELECTIVE GOLD × 16	-	17~24, 33~40	WHITE	3-174917-1
3	TIN-LEAD	PRE-TIN × 32	-	17~24, 33~40	WHITE	3-174917-1
2	TIN-LEAD	SELECTIVE GOLD × 15	-	18~24, 27~32, 36, 44	YELLOW	2-174917-7
2	TIN-LEAD	PRE-TIN × 33	-	18~24, 27~32, 36, 44	YELLOW	2-174917-7
0	PRE-TIN × 4.8	-	-	-	ORANGE	174917-8
0	PRE-TIN × 4.8	-	-	-	YELLOW	174917-7
0	PRE-TIN × 4.8	-	-	-	GRAY	174917-6
0	PRE-TIN × 4.8	-	-	-	BLUE	174917-5
0	PRE-TIN × 4.8	-	-	-	WHITE	174917-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIN T. SHINOHARA
CHK K. BETSUJI
APPROV K. BETSUJI

TE Connectivity

48POSITION CAP HOUSING ASSEMBLY
040/070 SERIES HYBRID I/O CONNECTOR

00779-174917

SCALE 2:1 SHEET 1 OF 1 REV M2