


NUMBER C-175151

三角度 (3rd ANGLE PROJECTION)


METRIC

単位: mm DIMENSIONS IN MM. DO NOT SCALE PRINT




PRINT DIST

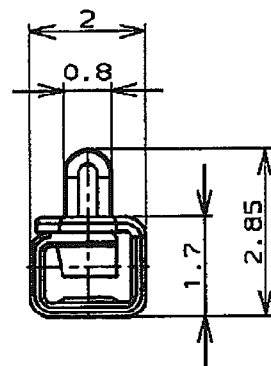


断面 "B" - "B"
(SECT)




断面 "C" - "C"
(SECT)

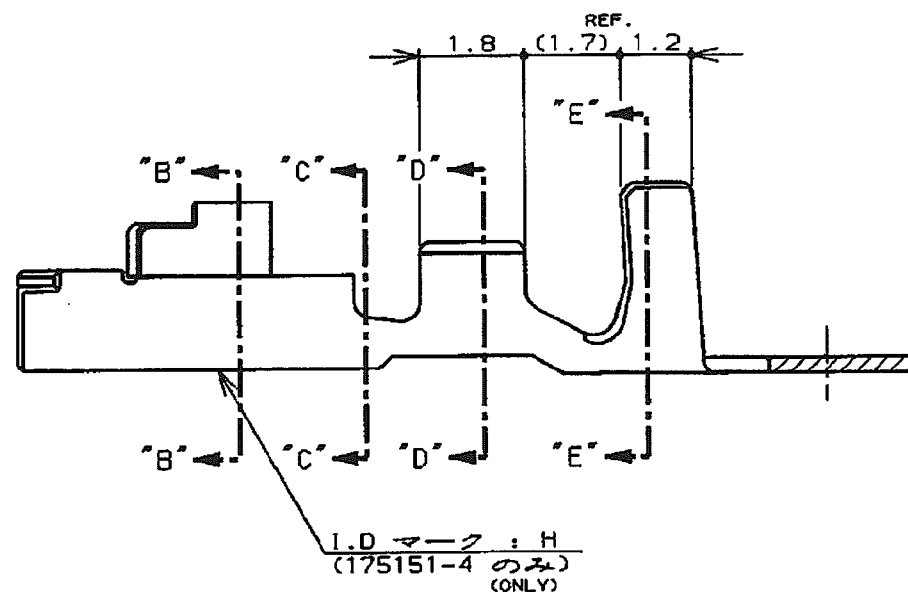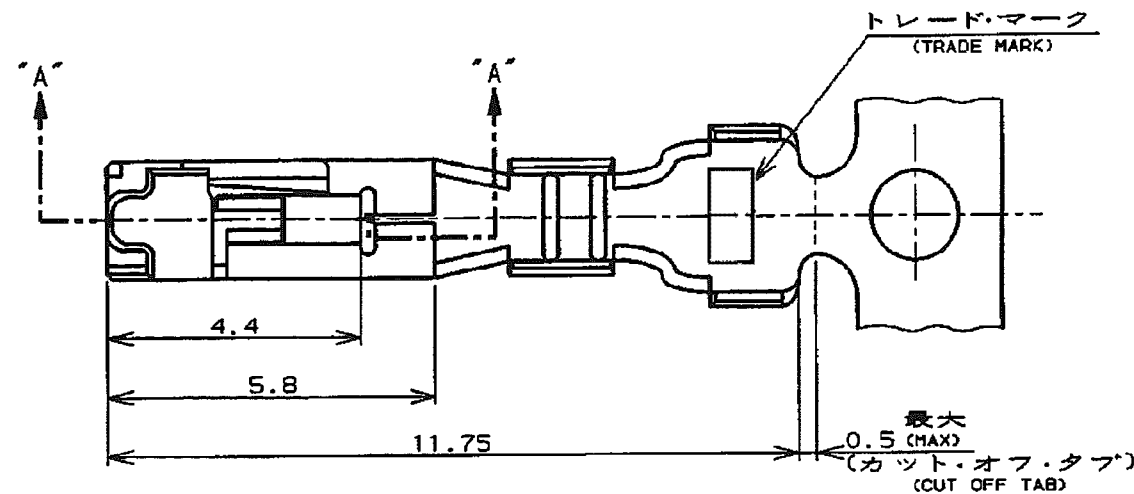

断面 "A" - "A"
(SECT) (175151-1, -2)

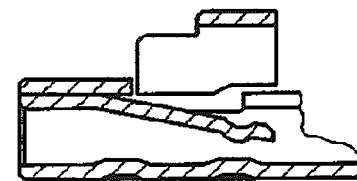

断面 "A" - "A"
(SECT) (175151-4)

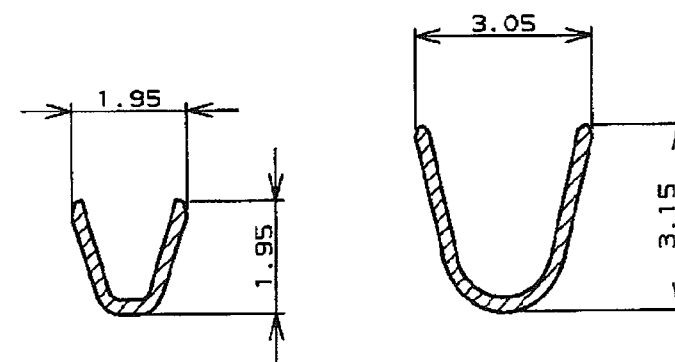

断面 "D" - "D"
(SECT)

断面 "E" - "E"
(SECT)

注記:

1. 適用規格

製品規格 : 108-5302

取付適用規格 : 114-5142

2.

取扱説明書 : IS-503J

NOTES:

1. APPLICABLE SPEC

PRODUCT SPEC : 108-5302

APPLICATION SPEC : 114-5142

2. INSTRUTION SHEET : IS-503J

	NYE: 502H-20-UV 1L7"カトオ化処理 (APPLIED LUBRICANT OIL)	錫めっき黄銅 (PRE TINNED BRASS)	175151-5
175155-4	---	錫めっき黄銅合金 (PRE TINNED COPPER ALLOY)	175151-4
175155-2	---	錫めっき黄銅 (PRE TINNED BRASS)	175151-2
175155-1	---	錫めっき黄銅合金 (PRE TINNED COPPER ALLOY)	175151-1
バラ状端子型番 (L.P P/N)	仕上 (FINISH)	材料 (MATERIAL)	型番 (P/N)

F1	REVISED PER ECO-11-005030	RK	HMR	01APR11
LTR	変更 (REVISION RECORD)	DR	CHK	DATE

DR.	8. JUN '95	DE.	8. JUN '95
N. NAGASHIMA		M. SHINDO	
CHK.	8. JUN '95	APP.	8. JUN '95
M. SHINDO		Y. KASHIWA	

一般公差 (GENERAL TOLERANCE)	10以下 : ±0.2 10を超え 30以下 : ±0.25 30を超え 100以下 : ±0.3 角 度 : ±3°	LOD	番号(No.)
B	J	C-175151	
尺度 (SCALE)	REV.	F1	SHEET
1/1			1 OF 1

(CUSTOMER DRAWING) 参 考 図 面