

www.ti.com

# LM4674 Boomer® Audio Power Amplifier Series Filterless 2.5W Stereo Class D Audio Power

# Amplifier

Check for Samples: LM4674

## **FEATURES**

- **Output Short Circuit Protection**
- **Stereo Class D Operation**
- No Output Filter Required
- Logic Selectable Gain
- Independent Shutdown Control
- Minimum External Components
- **Click and Pop Suppression**
- **Micro-Power Shutdown**
- Available in Space-Saving 2mm x 2mm x 0.6mm DSBGA, and 4mm x 4mm x 0.8mm **WQFN Packages**

## **APPLICATIONS**

- **Mobile Phones**
- **PDAs**
- Laptops

## **KEY SPECIFICATIONS**

- Efficiency at 3.6V, 100mW into  $8\Omega$ : 80% (typ)
- Efficiency at 3.6V, 500mW into  $8\Omega$ : 85% (typ)
- Efficiency at 5V, 1W into 8Ω: 85% (typ) .
- **Quiescent Power Supply Current** at 3.6V supply: 4mA
- Power Output at  $V_{DD} = 5V$ ,  $R_1 = 4\Omega$ , THD  $\leq 10\%$ : 2.5 W (typ)
- Shutdown Current: 0.03µA (typ)

## DESCRIPTION

The LM4674 is a single supply, high efficiency, 2.5W/channel, filterless switching audio amplifier. A low noise PWM architecture eliminates the output filter, reducing external component count, board area consumption, system cost, and simplifying design.

The LM4674 is designed to meet the demands of mobile phones and other portable communication devices. Operating from a single 5V supply, the device is capable of delivering 2.5W/channel of continuous output power to a  $4\Omega$  load with less than 10% THD+N. Flexible power supply requirements allow operation from 2.4V to 5.5V.

The LM4674 features high efficiency compared to conventional Class AB amplifiers. When driving an  $8\Omega$  speaker from a 3.6V supply, the device features 85% efficiency at  $P_{\Omega}$  = 500mW. Four gain options are pin selectable through the G0 and G1 pins.

Output short circuit protection prevents the device from being damaged during fault conditions. Superior click and pop suppression eliminates audible transients on power-up/down and during shutdown. Independent left/right shutdown control maximizes power savings in mixed mono/stereo applications.




Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet. All trademarks are the property of their respective owners.



www.ti.com

### **TYPICAL APPLICATION**

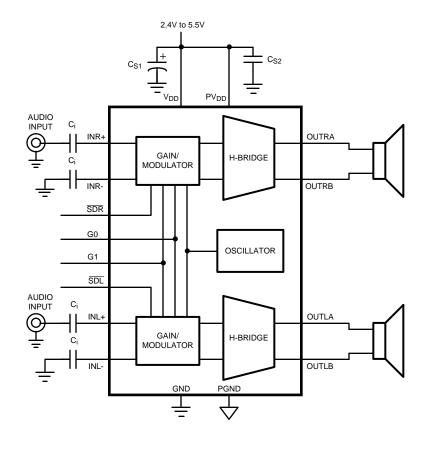

 $\begin{array}{l} C_i = 1 \ \mu F \\ C_{S1} = 1 \ \mu F \\ C_{S2} = 0.1 \ \mu F \end{array}$ 

#### Figure 1. Typical Audio Amplifier Application Circuit

### **EXTERNAL COMPONENTS DESCRIPTION**

### (Figure 1)

Comp	onents	Functional Description
1.	C <sub>S</sub>	Supply bypass capacitor which provides power supply filtering. Refer to the AUDIO AMPLIFIER INPUT CAPACITOR SELECTION section for information concerning proper placement and selection of the supply bypass capacitor.
2.	Ci	Input AC coupling capacitor which blocks the DC voltage at the amplifier's input terminals.



LM4674

## **CONNECTION DIAGRAM**

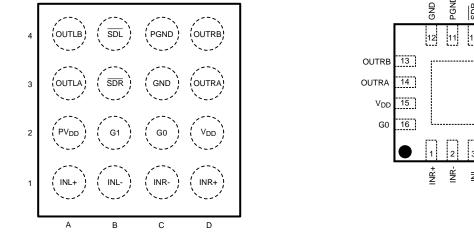


Figure 2. DSBGA (Top View) See YZR0016 Package





Figure 3. WQFN (Top View) See RGH0016A Package



ÈXAS

www.ti.com

PIN DESCRIPTION									
BUMP	PIN	NAME	FUNCTION						
A1	4	INL+	Non-inverting left channel input						
A2	6	PV <sub>DD</sub>	Power V <sub>DD</sub>						
A3	7	OUTLA	Left channel output A						
A4	8	OUTLB	Left channel output B						
B1	3	INL-	Inverting left channel input						
B2	5	G1	Gain setting input 1						
B3	10	SDR	Right channel shutdown input						
B4	9	SDL	Left channel shutdown input						
C1	2	INR-	Inverting right channel input						
C2	16	G0	Gain setting input 0						
C3	12	GND	Ground						
C4	11	PGND	Power Ground						
D1	1	INR+	Non-inverting right channel input						
D2	15	V <sub>DD</sub>	Power Supply						
D3	14	OUTRA	Right channel output A						
D4	13	OUTRB	Right channel output B						



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.



www.ti.com

#### SNAS344E - DECEMBER 2005 - REVISED APRIL 2013

## ABSOLUTE MAXIMUM RATINGS<sup>(1)(2)</sup>

Supply Voltage <sup>(1)</sup>		6.0V	
Storage Temperature		−65°C to +150°C	
Input Voltage	–0.3V to V <sub>DD</sub> +0.3V		
Power Dissipation <sup>(3)</sup>			
ESD Susceptibility, all other pins <sup>(4)</sup>	SD Susceptibility, all other pins <sup>(4)</sup>		
ESD Susceptibility <sup>(5)</sup>		200V	
Junction Temperature (T <sub>JMAX</sub> )		150°C	
Thermal Resistance	θ <sub>JA</sub> (DSBGA)	45.7°C/W	
	θ <sub>JA</sub> (WQFN)	38.9°C/W	

(1) All voltages are measured with respect to the ground pin, unless otherwise specified.

(2) Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is functional, but do not ensure specific performance limits. Electrical Characteristics state DC and AC electrical specifications under particular test conditions which ensure specific performance limits. This assumes that the device is within the Operating Ratings. Specifications are not ensured for parameters where no limit is given, however, the typical value is a good indication of device performance.

(3) The maximum power dissipation must be derated at elevated temperatures and is dictated by  $T_{JMAX}$ ,  $\theta_{JA}$ , and the ambient temperature,  $T_A$ . The maximum allowable power dissipation is  $P_{DMAX} = (T_{JMAX} - T_A)/\theta_{JA}$  or the number given in Absolute Maximum Ratings, whichever is lower. For the LM4674 see power derating currents for more information.

(4) Human body model, 100pF discharged through a  $1.5k\Omega$  resistor.

(5) Machine Model, 220pF–240pF discharged through all pins.

#### **OPERATING RATINGS**<sup>(1)(2)</sup>

Temperature Range ( $T_{MIN} \le T_A \le T_{MAX}$ )	$-40^{\circ}C \le T_{A} \le 85^{\circ}C$
Supply Voltage	$2.4V \le V_{DD} \le 5.5V$

(1) All voltages are measured with respect to the ground pin, unless otherwise specified.

(2) Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is functional, but do not ensure specific performance limits. Electrical Characteristics state DC and AC electrical specifications under particular test conditions which ensure specific performance limits. This assumes that the device is within the Operating Ratings. Specifications are not ensured for parameters where no limit is given, however, the typical value is a good indication of device performance.

### ELECTRICAL CHARACTERISTICS $V_{DD} = 3.6V^{(1)(2)}$

The following specifications apply for  $A_V = 6dB$ ,  $R_L = 15\mu H + 8\Omega + 15\mu H$ , f = 1kHz unless otherwise specified. Limits apply for  $T_A = 25^{\circ}C$ .

Symbol	Bananatan		LM4	Units	
	Parameter	Conditions	Typical <sup>(3)</sup>	Limit <sup>(4)(5)</sup>	(Limits)
V <sub>OS</sub>	Differential Output Offset Voltage	$V_{IN} = 0, V_{DD} = 2.4V$ to 5.0V	5		mV
I <sub>DD</sub> Quiescent Power Supply	Outersent Device Current Current	V <sub>IN</sub> = 0, R <sub>L</sub> = ∞, Both channels active, V <sub>DD</sub> = 3.6V	4	6	mA
	Quiescent Power Supply Current	$V_{IN} = 0, R_L = \infty,$ Both channels active, $V_{DD} = 5V$	5	7.5	mA
I <sub>SD</sub>	Shutdown Current	$V \overline{SDR} = V \overline{SDL} = GND$	0.03	1	μA
V <sub>SDIH</sub>	Shutdown Voltage Input High			1.4	V (min)
V <sub>SDIL</sub>	Shutdown Voltage Input Low			0.4	V (max)
T <sub>WU</sub>	Wake Up Time	$V \overline{SDR/SDL} = 0.4V$	0.5		ms

(1) All voltages are measured with respect to the ground pin, unless otherwise specified.

(2) Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is functional, but do not ensure specific performance limits. Electrical Characteristics state DC and AC electrical specifications under particular test conditions which ensure specific performance limits. This assumes that the device is within the Operating Ratings. Specifications are not ensured for parameters where no limit is given, however, the typical value is a good indication of device performance.

- (3) Typicals are measured at 25°C and represent the parametric norm.
- (4) Limits are specified to AOQL (Average Outgoing Quality Level).
- (5) Datasheet min/max specification limits are specified by design, test, or statistical analysis.

Copyright © 2005–2013, Texas Instruments Incorporated



www.ti.com

# ELECTRICAL CHARACTERISTICS $V_{DD} = 3.6V^{(1)(2)}$ (continued)


The following specifications apply for  $A_V = 6dB$ ,  $R_L = 15\mu H + 8\Omega + 15\mu H$ , f = 1kHz unless otherwise specified. Limits apply for  $T_A = 25^{\circ}C$ .

Symbol	Parameter	Conditions		4674	Units				
cymser			Typical <sup>(3)</sup>	Limit <sup>(4)(5)</sup>	(Limits)				
	Gain Input Resistance Output Power	G0, G1 = GND R <sub>L</sub> = ∞	6	6 ± 0.5	dB				
۸	Gain	$G0 = V_{DD}, G1 = GND$ $R_L = \infty$	12	12 ± 0.5	dB				
A <sub>V</sub>	Gain	$\begin{array}{l} G0 = GND,  G1 = V_{DD} \\ R_L = \infty \end{array}$	18	18 ± 0.5	dB				
		$\begin{array}{l} G0,G1=V_{DD}\\ R_L=\infty \end{array}$	24	24 ± 0.5	dB				
		$A_V = 6 dB$	28		kΩ				
D	Input Posistanco	$A_V = 12 dB$	18.75		kΩ				
NN	input Resistance	$A_V = 18 dB$	11.25		kΩ				
		$A_V = 24 dB$	6.25		kΩ				
		$R_L$ = 15µH + 4Ω + 15µH, THD ≤ 10% f = 1kHz, 22kHz BW							
		$V_{DD} = 5V$	2.5		W				
		V <sub>DD</sub> = 3.6V	1.2		W				
		V <sub>DD</sub> = 2.5V	0.530		W				
		$R_L$ = 15µH + 8Ω + 15µH, THD ≤ 10% f = 1kHz, 22kHz BW							
		$V_{DD} = 5V$	1.5		W				
		$V_{DD} = 3.6V$	0.78	0.6	W				
	$V_{DD} = 2.5 V$	0.350		W					
F0		$R_L$ = 15µH + 4Ω + 15µH, THD ≤ 1% f = 1kHz, 22kHz BW							
		$V_{DD} = 5V$	1.9		W				
		V <sub>DD</sub> = 3.6V	1		W				
		$V_{DD} = 2.5V$	0.430		W				
		$R_L$ = 15µH + 8 $\Omega$ + 15µH, THD = 1% f = 1kHz, 22kHz BW							
		$V_{DD} = 5V$	1.25		W				
Po Outp Po Outp FHD+N Total PSRR Powe CMRR Com		V <sub>DD</sub> = 3.6V	0.63		W				
	v       Gain         IN       Input Resistance         O       Output Power         HD+N       Total Harmonic Distortion         SRR       Power Supply Rejection Ratio         MRR       Common Mode Rejection Ratio         MRR       Common Mode Rejection Ratio         Efficiency       Ealk         NR       Signal to Noise Ratio	V <sub>DD</sub> = 2.5V	0.285		W				
	Total Harmonia Distartian	$P_O = 500 \text{mW}, \text{ f} = 1 \text{kHz}, \text{ RL} = 8 \Omega$	0.07		%				
א+עריו		$P_O = 300$ mW, f = 1kHz, RL = 8 $\Omega$	0.05		%				
		$V_{RIPPLE} = 200mV_{P-P}$ Sine, $f_{RIPPLE} = 217Hz$ , Inputs AC GND, $C_i = 1\mu$ F, input referred	75		dB				
PSRR Power Supply Rejection Ratio	Power Supply Rejection Ratio		75		dB				
CMRR	Common Mode Rejection Ratio	V <sub>RIPPLE</sub> = 1V <sub>P-P</sub> f <sub>RIPPLE</sub> = 217Hz	67		dB				
η	Efficiency	$\label{eq:PO} \begin{array}{l} P_{O} = 1W, \ f = 1kHz, \\ R_{L} = 8\Omega, \ V_{DD} = 5V \end{array}$	85		%				
Xtalk	Crosstalk	$P_0 = 500 \text{mW}, \text{ f} = 1 \text{kHz}$	84		dB				
SNR	Signal to Noise Ratio	$V_{DD} = 5V, P_O = 1W$	96		dB				
ε <sub>OS</sub>	Output Noise	Input referred, A-Weighted Filter	20		μV				




### **BLOCK DIAGRAMS**


www.ti.com

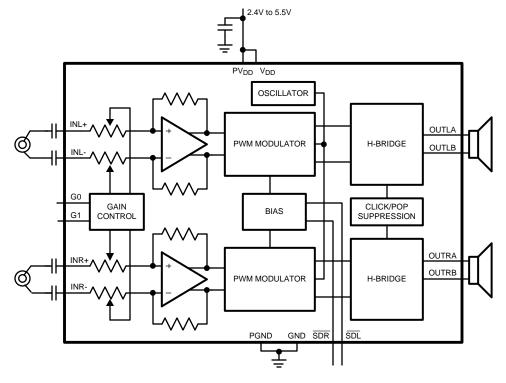



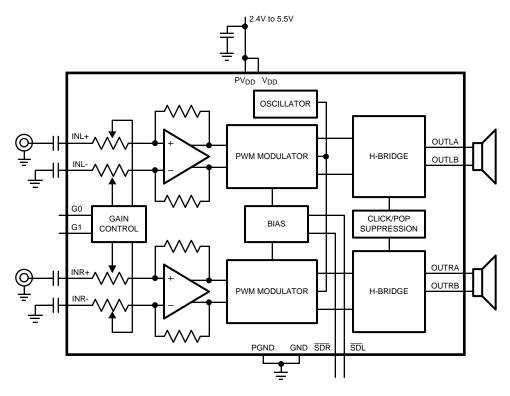



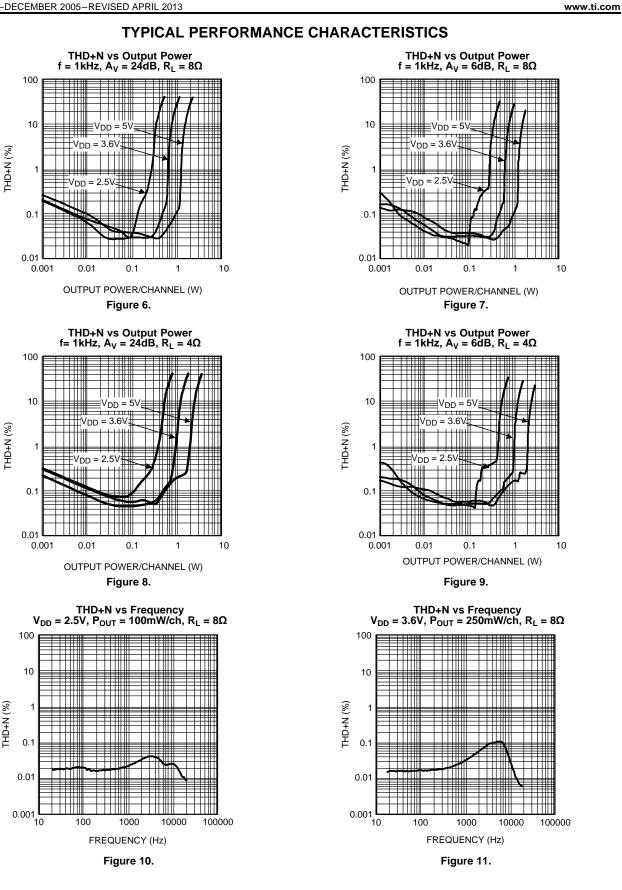


THD+N (%)


8

### **EXAS** INSTRUMENTS


#### www.ti.com

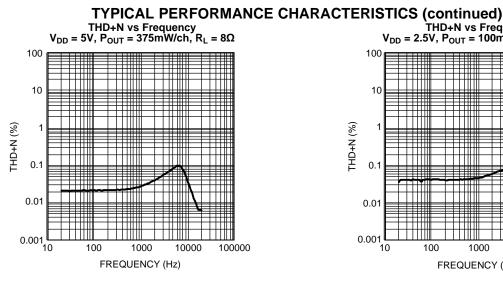


#### Figure 12.











SNAS344E - DECEMBER 2005 - REVISED APRIL 2013





#### Figure 15.




#### Copyright © 2005-2013, Texas Instruments Incorporated


9




www.ti.com



#### Figure 18.






#### Power Dissipation vs Output Power $R_L = 8\Omega$ , f = 1kHz 400 $V_{DD} = 5V$ POWER DISSIPATION (mW) 300 V<sub>DD</sub> = 3.6V V<sub>DD</sub> = 2.5V 200 100 POUT = POUTL + POUTR 0 500 1000 1500 2000 2500 0


#### OUTPUT POWER (mW) Figure 19.

Output Power/channel vs Supply Voltage  $R_L = 8\Omega, f = 1 \text{kHz}$ 



**TYPICAL PERFORMANCE CHARACTERISTICS (continued)** 



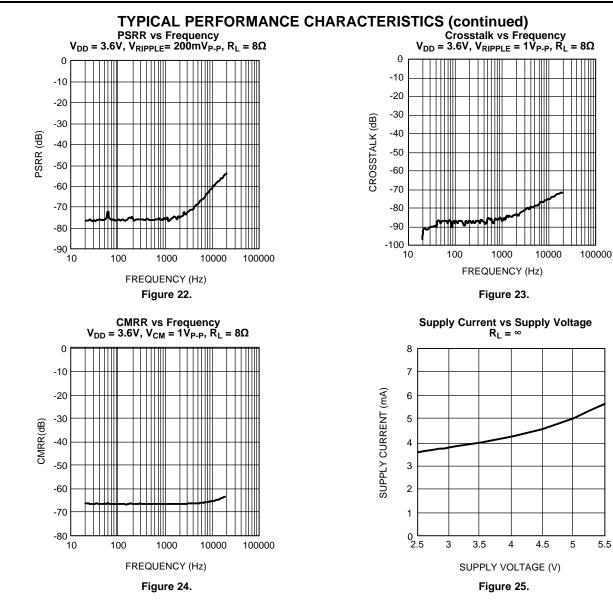

5.5



www.ti.com

### APPLICATION INFORMATION

#### GENERAL AMPLIFIER FUNCTION

The LM4674 stereo Class D audio power amplifier features a filterless modulation scheme that reduces external component count, conserving board space and reducing system cost. The outputs of the device transition from  $V_{DD}$  to GND with a 300kHz switching frequency. With no signal applied, the outputs for each channel switch with a 50% duty cycle, in phase, causing the two outputs to cancel. This cancellation results in no net voltage across the speaker, thus there is no current to the load in the idle state.

With the input signal applied, the duty cycle (pulse width) of the LM4674 outputs changes. For increasing output voltage, the duty cycle of the A output increases, while the duty cycle of the B output decreases for each channel. For decreasing output voltages, the converse occurs. The difference between the two pulse widths yields the differential output voltage.

#### DIFFERENTIAL AMPLIFIER EXPLANATION

As logic supplies continue to shrink, system designers are increasingly turning to differential analog signal handling to preserve signal to noise ratios with restricted voltage signs. The LM4674 features two fully differential amplifiers. A differential amplifier amplifies the difference between the two input signals. Traditional audio power amplifiers have typically offered only single-ended inputs resulting in a 6dB reduction of SNR relative to differential inputs. The LM4674 also offers the possibility of DC input coupling which eliminates the input coupling capacitors. A major benefit of the fully differential amplifier is the improved common mode rejection ratio (CMRR) over single ended input amplifiers. The increased CMRR of the differential amplifier reduces sensitivity to ground offset related noise injection, especially important in noisy systems.

#### POWER DISSIPATION AND EFFICIENCY

The major benefit of a Class D amplifier is increased efficiency versus a class AB amplifier. The efficiency of the LM4674 is attributed to the region of operation of the transistors in the output stage. The Class D output stage acts as current steering switches, consuming negligible amounts of power compared to their Class AB counterparts. Most of the power loss associated with the output stage is due to the IR loss of the MOSFET on-resistance (R<sub>DS(ON)</sub>), along with switching losses due to gate charge.

#### SHUTDOWN FUNCTION

The LM4674 features independent left and right channel shutdown controls, allowing each channel to be disabled independently. SDR controls the right channel, while SDL controls the left channel. Driving either low disables the corresponding channel.

It is best to switch between ground and  $V_{DD}$  for minimum current consumption while in shutdown. The LM4674 may be disabled with shutdown voltages in between GND and  $V_{DD}$ , the idle current will be greater than the typical 0.03µA value. For logic levels between GND and  $V_{DD}$  bypass SD\_ with a 0.1µF capacitor.

The LM4674 shutdown inputs have internal pulldown resistors. The purpose of these resistors is to eliminate any unwanted state changes when  $\overline{SD}_{-}$  is floating. To minimize shutdown current,  $\overline{SD}_{-}$  should be driven to GND or left floating. If  $\overline{SD}_{-}$  is not driven to GND or floating, an increase in shutdown supply current will be noticed.

#### SINGLE-ENDED AUDIO AMPLIFIER CONFIGURATION

The LM4674 is compatible with single-ended sources. When configured for single-ended inputs, input capacitors must be used to block any DC component at the input of the device. Figure 5 shows the typical single-ended applications circuit.

#### AUDIO AMPLIFIER POWER SUPPLY BYPASSING/FILTERING

Proper power supply bypassing is critical for low noise performance and high PSRR. Place the supply bypass capacitor as close to the device as possible. Typical applications employ a voltage regulator with  $10\mu$ F and  $0.1\mu$ F bypass capacitors that increase supply stability. These capacitors do not eliminate the need for bypassing of the LM4674 supply pins. A  $1\mu$ F capacitor is recommended.



### AUDIO AMPLIFIER INPUT CAPACITOR SELECTION

Input capacitors may be required for some applications, or when the audio source is single-ended. Input capacitors block the DC component of the audio signal, eliminating any conflict between the DC component of the audio source and the bias voltage of the LM4674. The input capacitors create a high-pass filter with the input resistance Ri. The -3dB point of the high pass filter is found using Equation (1) below.

 $f = 1 / 2\pi R_i C_i$ 

(1)

The values for Ri can be found in the EC table for each gain setting.

The input capacitors can also be used to remove low frequency content from the audio signal. Small speakers cannot reproduce, and may even be damaged by low frequencies. High pass filtering the audio signal helps protect the speakers. When the LM4674 is using a single-ended source, power supply noise on the ground is seen as an input signal. Setting the high-pass filter point above the power supply noise frequencies, 217 Hz in a GSM phone, for example, filters out the noise such that it is not amplified and heard on the output. Capacitors with a tolerance of 10% or better are recommended for impedance matching and improved CMRR and PSRR.

#### AUDIO AMPLIFIER GAIN SETTING

The LM4674 features four internally configured gain settings. The device gain is selected through the two logic inputs, G0 and G1. The gain settings are as shown in the following table.

LOGIC	INPUT	GAIN			
G1	G0	V/V	dB		
0	0	2	6		
0	1	4	12		
1	0	8	18		
1	1	16	24		

#### PCB LAYOUT GUIDELINES

As output power increases, interconnect resistance (PCB traces and wires) between the amplifier, load and power supply create a voltage drop. The voltage loss due to the traces between the LM4674 and the load results in lower output power and decreased efficiency. Higher trace resistance between the supply and the LM4674 has the same effect as a poorly regulated supply, increasing ripple on the supply line, and reducing peak output power. The effects of residual trace resistance increases as output current increases due to higher output power, decreased load impedance or both. To maintain the highest output voltage swing and corresponding peak output power, the PCB traces that connect the output pins to the load and the supply pins to the power supply should be as wide as possible to minimize trace resistance.


The use of power and ground planes will give the best THD+N performance. In addition to reducing trace resistance, the use of power planes creates parasitic capacitors that help to filter the power supply line.

The inductive nature of the transducer load can also result in overshoot on one or both edges, clamped by the parasitic diodes to GND and VDD in each case. From an EMI standpoint, this is an aggressive waveform that can radiate or conduct to other components in the system and cause interference. In is essential to keep the power and output traces short and well shielded if possible. Use of ground planes beads and micros-strip layout techniques are all useful in preventing unwanted interference.

As the distance from the LM4674 and the speaker increases, the amount of EMI radiation increases due to the output wires or traces acting as antennas become more efficient with length. Ferrite chip inductors places close to the LM4674 outputs may be needed to reduce EMI radiation.


www.ti.com


## LM4674TL DEMO BOARD SCHEMATIC

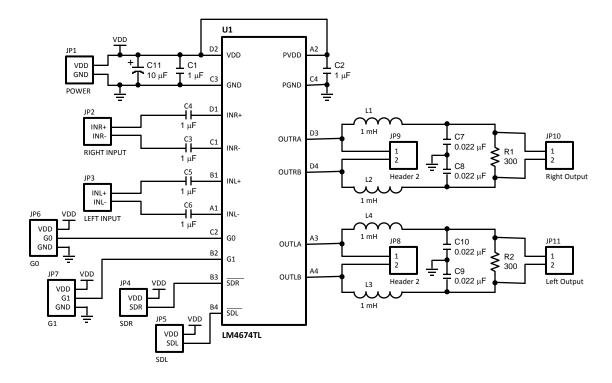



## LM4674TL DEMONSTRATION BOARD LAYOUT

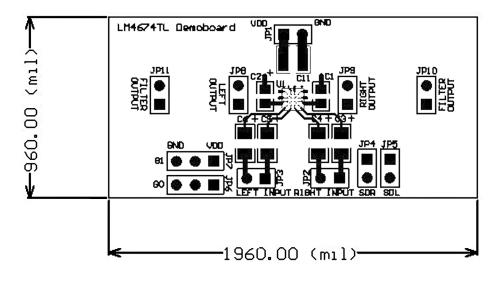





#### www.ti.com



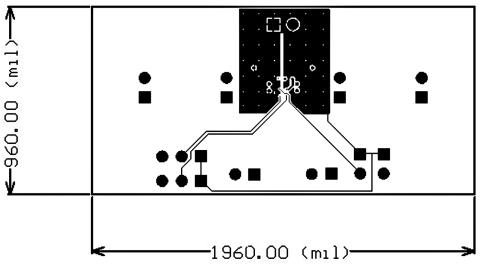


Figure 28. Layer 2

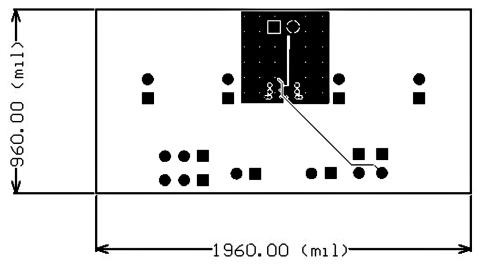



TEXAS INSTRUMENTS

SNAS344E - DECEMBER 2005 - REVISED APRIL 2013

www.ti.com

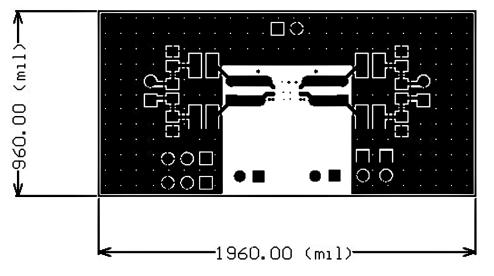


Figure 30. Layer 4

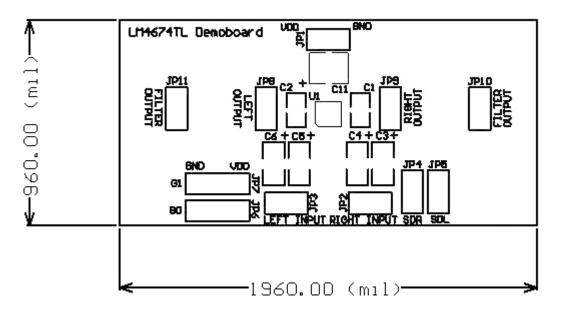


Figure 31. Top Silkscreen



LM4674

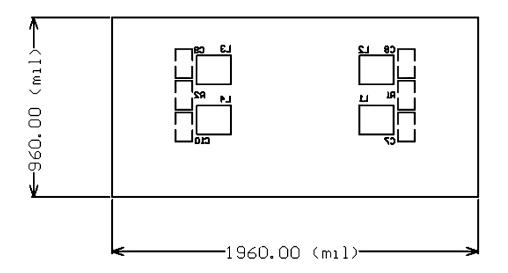


Figure 32. Bottom Silkscreen

### LM4674SQ DEMO BOARD SCHEMATIC

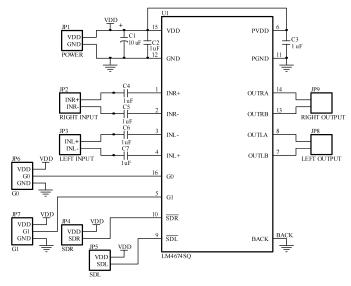


Figure 33. LM4674SQ Demo Board Schematic



www.ti.com

### LM4674SQ DEMONSTRATION BOARD LAYOUT

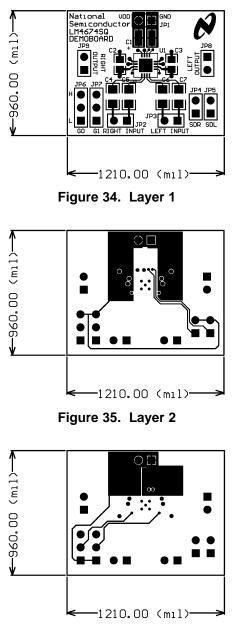


Figure 36. Layer 3






Figure 37. Top Silkscreen




Figure 38. Bottom Layer

### **REVISION TABLE**

Rev	Date	Description					
1.0	12/16/06	Initial release.					
1.1	05/17/06	Added the LLP package.					
1.2	05/31/06	Added the LLP markings.					
1.3	09/05/06	Added "No Load" in the Conditions on Av (3.6V table).					
1.4	09/21/06	Edited graphics (26, 38, 60) and input some text edits.					
1.5	09/27/06	Edited Figure 1 (page 2), TL and LLP pkg/marking drawings (page 3). Input text edits.					
1.6	07/13/07	Added the TL and SQ demo boards and schematics diagrams.					
1.7	10/30/07	Updated the SQ schematic diagram and replaced the demo boards.					
1.8	07/02/08	Text edits (under SHUTDOWN FUNCTION).					
E	04/05/13	Changed layout of National Data Sheet to TI format.					



26-Aug-2013

### **PACKAGING INFORMATION**

Orderable Device	Status	Package Type	Package	Pins	Package	Eco Plan	Lead/Ball Finish	MSL Peak Temp	Op Temp (°C)	Device Marking	Samples
	(1)		Drawing		Qty	(2)		(3)		(4/5)	
LM4674SQ/NOPB	ACTIVE	WQFN	RGH	16	1000	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM	-40 to 85	L4674SQ	Samples
LM4674TLX/NOPB	ACTIVE	DSBGA	YZR	16	3000	Green (RoHS & no Sb/Br)	SNAGCU	Level-1-260C-UNLIM	-40 to 85	GG2	Samples

<sup>(1)</sup> The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes. **Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between

the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

<sup>(3)</sup> MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

<sup>(4)</sup> There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

<sup>(5)</sup> Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

# PACKAGE MATERIALS INFORMATION

www.ti.com

Texas Instruments

### TAPE AND REEL INFORMATION





## QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal												
Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
LM4674SQ/NOPB	WQFN	RGH	16	1000	178.0	12.4	4.3	4.3	1.3	8.0	12.0	Q1
LM4674TLX/NOPB	DSBGA	YZR	16	3000	178.0	8.4	2.08	2.08	0.76	4.0	8.0	Q1

TEXAS INSTRUMENTS

www.ti.com

# PACKAGE MATERIALS INFORMATION

12-Aug-2013



\*All dimensions are nominal


Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
LM4674SQ/NOPB	WQFN	RGH	16	1000	210.0	185.0	35.0
LM4674TLX/NOPB	DSBGA	YZR	16	3000	210.0	185.0	35.0

# PACKAGE OUTLINE

# **RGH0016A**

## WQFN - 0.8 mm max height

WQFN

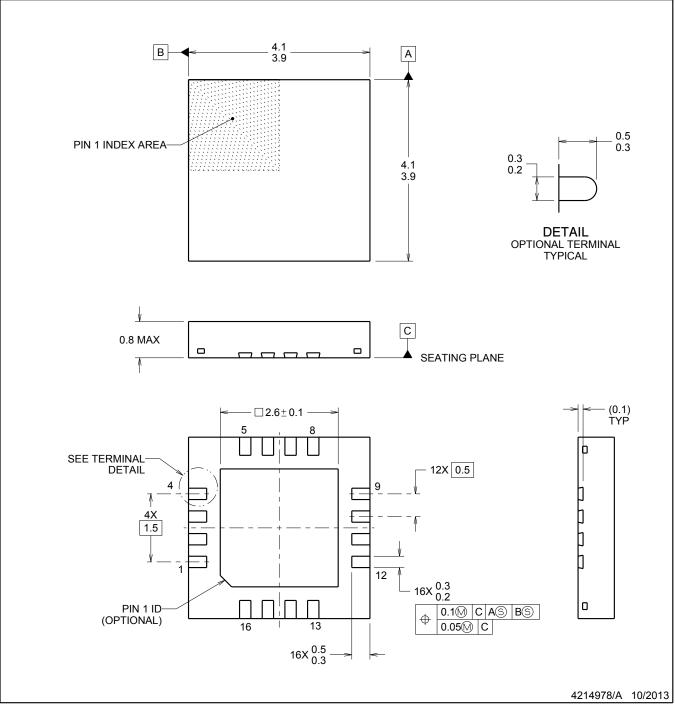

NOTES:

- 1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
  This drawing is subject to change without notice.
  The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.




# **RGH0016A**

# EXAMPLE BOARD LAYOUT

## WQFN - 0.8 mm max height

WQFN

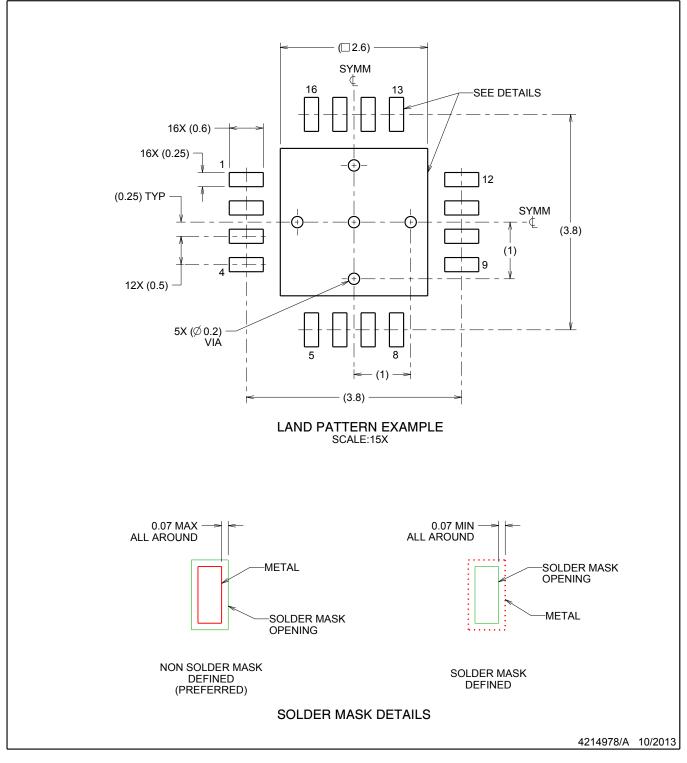

NOTES: (continued)

4. This package is designed to be soldered to a thermal pad on the board. For more information, see QFN/SON PCB application report in literature No. SLUA271 (www.ti.com/lit/slua271).




# **RGH0016A**

# EXAMPLE STENCIL DESIGN

## WQFN - 0.8 mm max height

WQFN

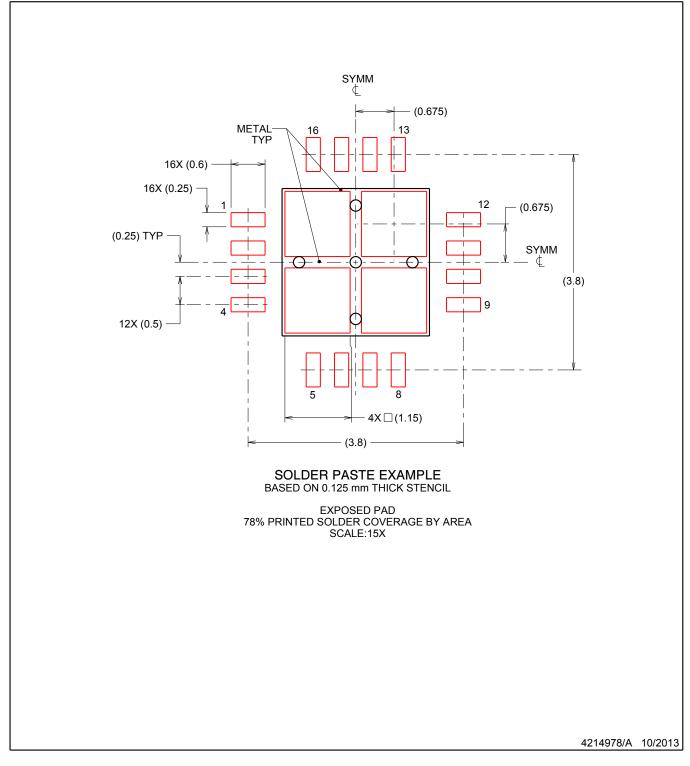


NOTES: (continued)

5. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.



# YZR0016

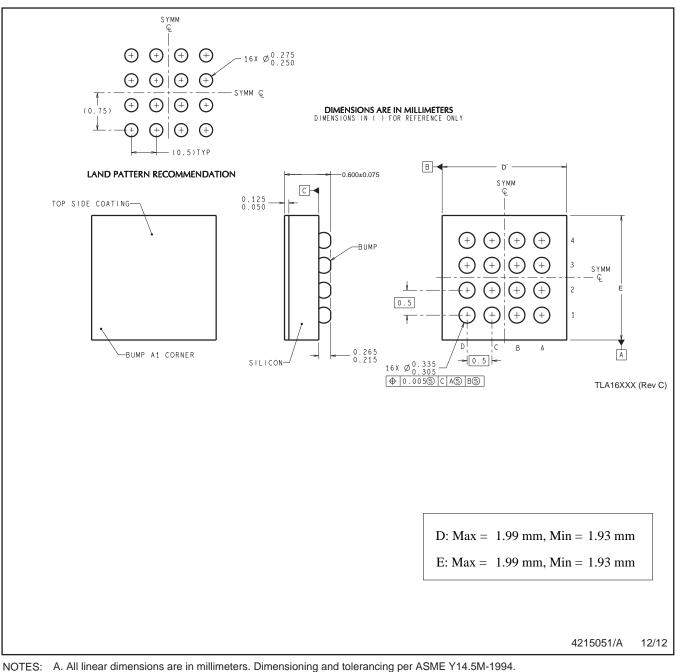

B. This drawing is subject to change without notice.



#### IMPORTANT NOTICE FOR TI DESIGN INFORMATION AND RESOURCES

Texas Instruments Incorporated ('TI") technical, application or other design advice, services or information, including, but not limited to, reference designs and materials relating to evaluation modules, (collectively, "TI Resources") are intended to assist designers who are developing applications that incorporate TI products; by downloading, accessing or using any particular TI Resource in any way, you (individually or, if you are acting on behalf of a company, your company) agree to use it solely for this purpose and subject to the terms of this Notice.

TI's provision of TI Resources does not expand or otherwise alter TI's applicable published warranties or warranty disclaimers for TI products, and no additional obligations or liabilities arise from TI providing such TI Resources. TI reserves the right to make corrections, enhancements, improvements and other changes to its TI Resources.

You understand and agree that you remain responsible for using your independent analysis, evaluation and judgment in designing your applications and that you have full and exclusive responsibility to assure the safety of your applications and compliance of your applications (and of all TI products used in or for your applications) with all applicable regulations, laws and other applicable requirements. You represent that, with respect to your applications, you have all the necessary expertise to create and implement safeguards that (1) anticipate dangerous consequences of failures, (2) monitor failures and their consequences, and (3) lessen the likelihood of failures that might cause harm and take appropriate actions. You agree that prior to using or distributing any applications. TI has not conducted any testing other than that specifically described in the published documentation for a particular TI Resource.

You are authorized to use, copy and modify any individual TI Resource only in connection with the development of applications that include the TI product(s) identified in such TI Resource. NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER TI INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT OF TI OR ANY THIRD PARTY IS GRANTED HEREIN, including but not limited to any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information regarding or referencing third-party products or services does not constitute a license to use such products or services, or a warranty or endorsement thereof. Use of TI Resources may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

TI RESOURCES ARE PROVIDED "AS IS" AND WITH ALL FAULTS. TI DISCLAIMS ALL OTHER WARRANTIES OR REPRESENTATIONS, EXPRESS OR IMPLIED, REGARDING TI RESOURCES OR USE THEREOF, INCLUDING BUT NOT LIMITED TO ACCURACY OR COMPLETENESS, TITLE, ANY EPIDEMIC FAILURE WARRANTY AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

TI SHALL NOT BE LIABLE FOR AND SHALL NOT DEFEND OR INDEMNIFY YOU AGAINST ANY CLAIM, INCLUDING BUT NOT LIMITED TO ANY INFRINGEMENT CLAIM THAT RELATES TO OR IS BASED ON ANY COMBINATION OF PRODUCTS EVEN IF DESCRIBED IN TI RESOURCES OR OTHERWISE. IN NO EVENT SHALL TI BE LIABLE FOR ANY ACTUAL, DIRECT, SPECIAL, COLLATERAL, INDIRECT, PUNITIVE, INCIDENTAL, CONSEQUENTIAL OR EXEMPLARY DAMAGES IN CONNECTION WITH OR ARISING OUT OF TI RESOURCES OR USE THEREOF, AND REGARDLESS OF WHETHER TI HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

You agree to fully indemnify TI and its representatives against any damages, costs, losses, and/or liabilities arising out of your noncompliance with the terms and provisions of this Notice.

This Notice applies to TI Resources. Additional terms apply to the use and purchase of certain types of materials, TI products and services. These include; without limitation, TI's standard terms for semiconductor products <a href="http://www.ti.com/sc/docs/stdterms.htm">http://www.ti.com/sc/docs/stdterms.htm</a>), evaluation modules, and samples (<a href="http://www.ti.com/sc/docs/stdterms.htm">http://www.ti.com/sc/docs/stdterms.htm</a>), evaluation

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2017, Texas Instruments Incorporated