
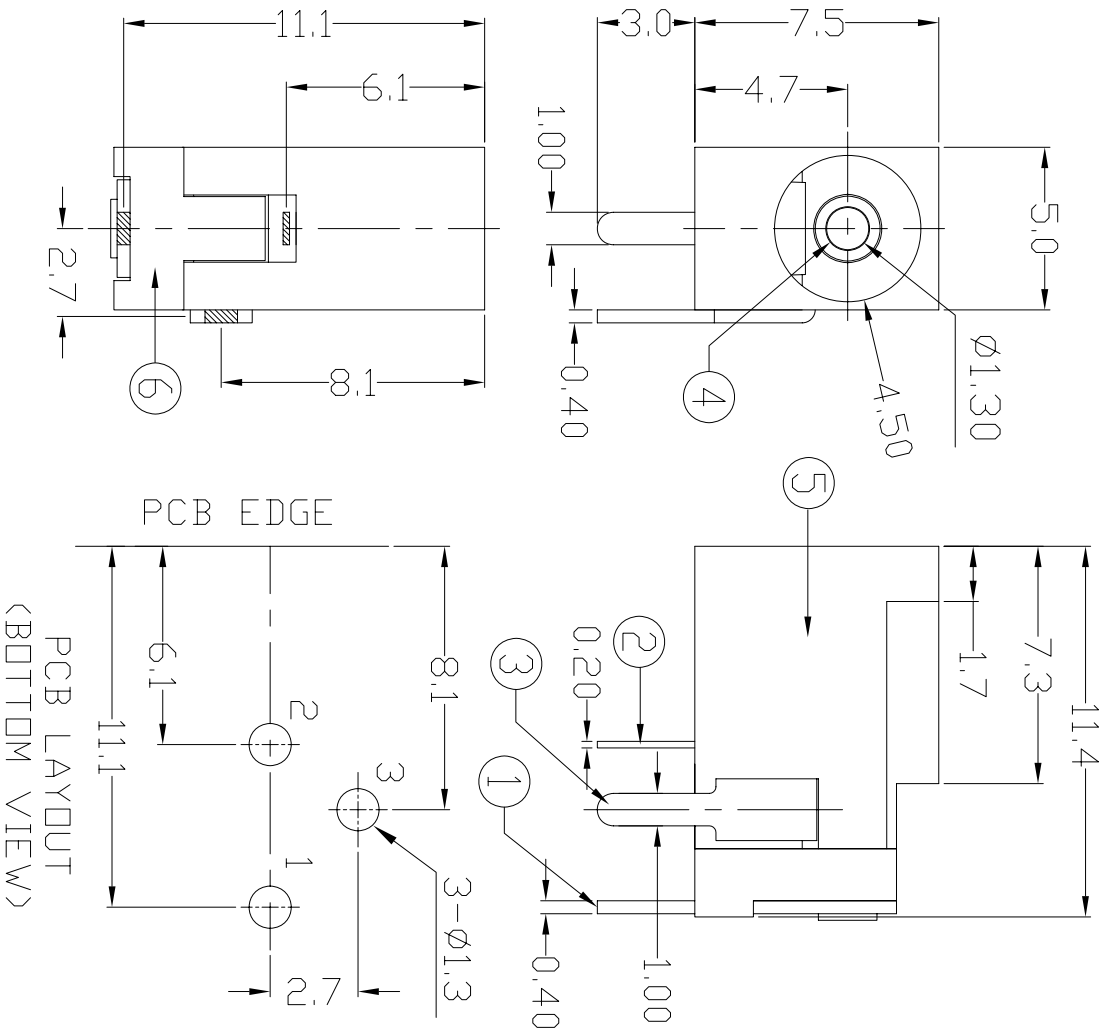


REV	ZONE	REVISION	DATE

NO.	NAME	MATERIAL	FINISH	Q'TY
1	PIN TERM.	BRASS 0.4	TIN PLATED	1
2	SLEEVE TERM.	P.B.S 0.2	TIN PLATED	1
3	BREAK TERM.	BRASS 0.4	TIN PLATED	1
4	CENTER PIN	BRASS ϕ 1.3	NICKEL PLATED	1
5	HOUSING	PBT G.F.	BLACK	1
6	BACK COVER	PBT G.F.	BLACK	1



Specification:
 Contact Resistance: 30m Ohm Max. At AC 100mA Max 1KHz
 Insulation Resistance: 100M Ohm Min. At 500V DC
 Rated Voltage And Current: DC12V. 2A Max; AC 100V. 1A Max
 Dielectric Withstanding Voltage: 500V AC for 1 Minute
 Insertion Force: 3.0Kg Maximum.
 Extraction Force: 0.3Kg Minimum.

Drawing No		3272-001		UNIT	mm	SCALE	1:1	TITLE	DC POWER JACK
APPD.	CKD.	DWG.	DATE	TOLERANCE	PART NO.	REV.			
JAMES 01-06-12	SHIRLEY 01-06-12	TINA 30-12-08	30-12-08	X. X. XX XXX #038 #025 #013 #005	3272-3PBE	A0			
MODEL	PAGE 1 OF 1								