
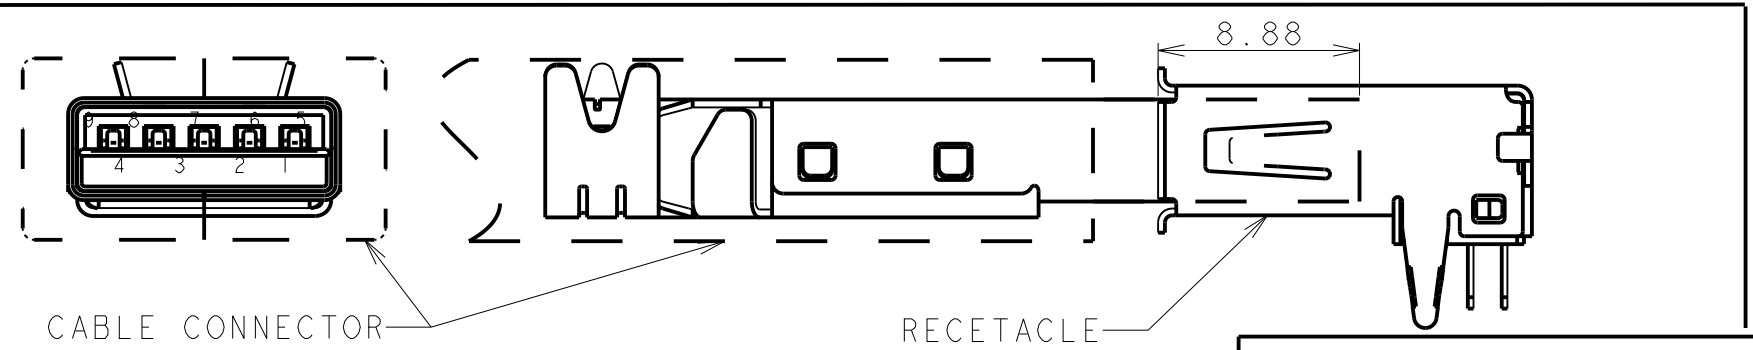
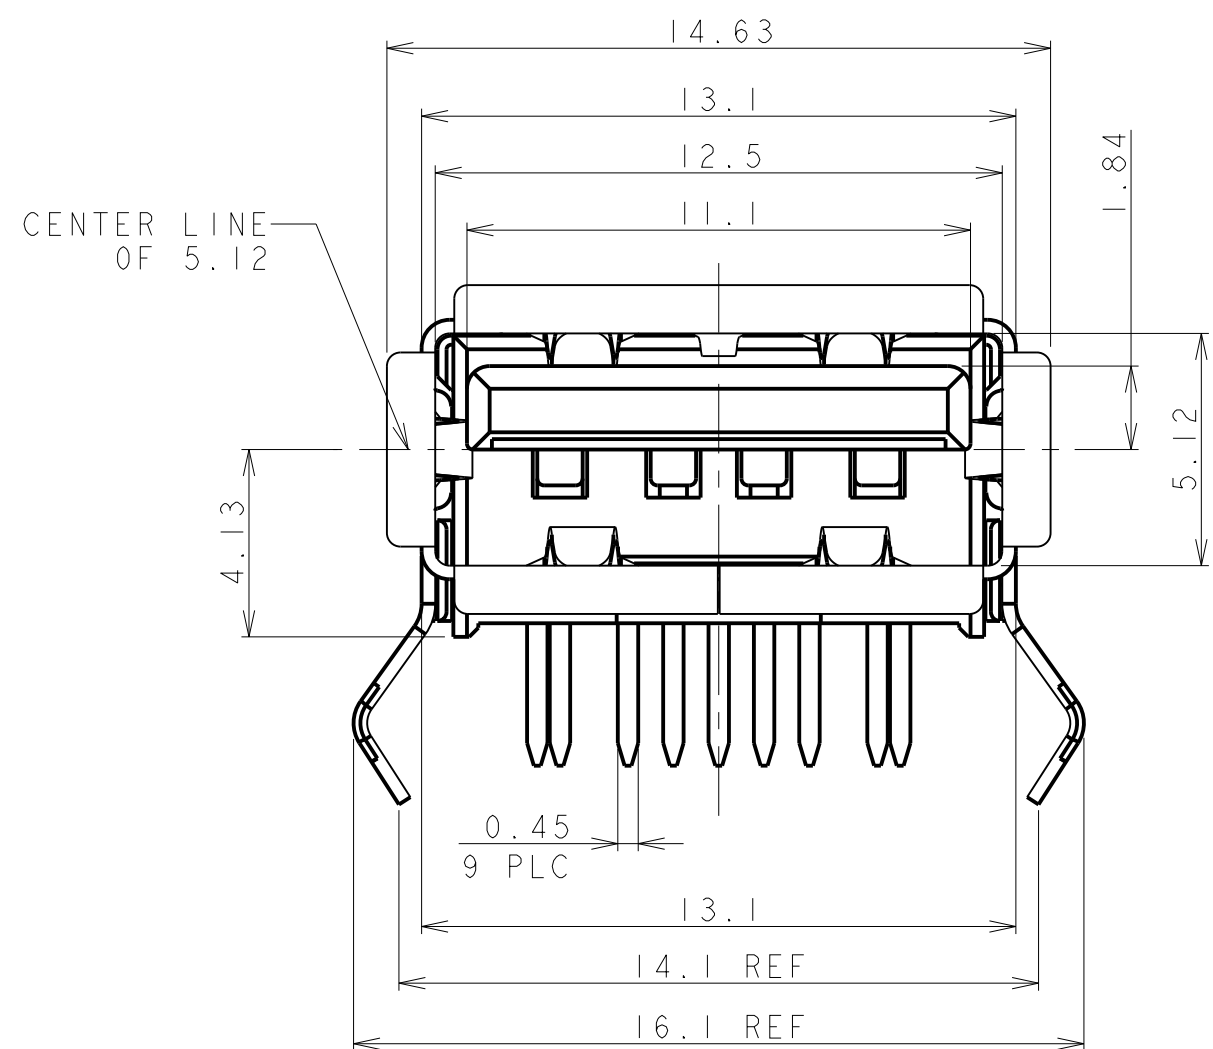
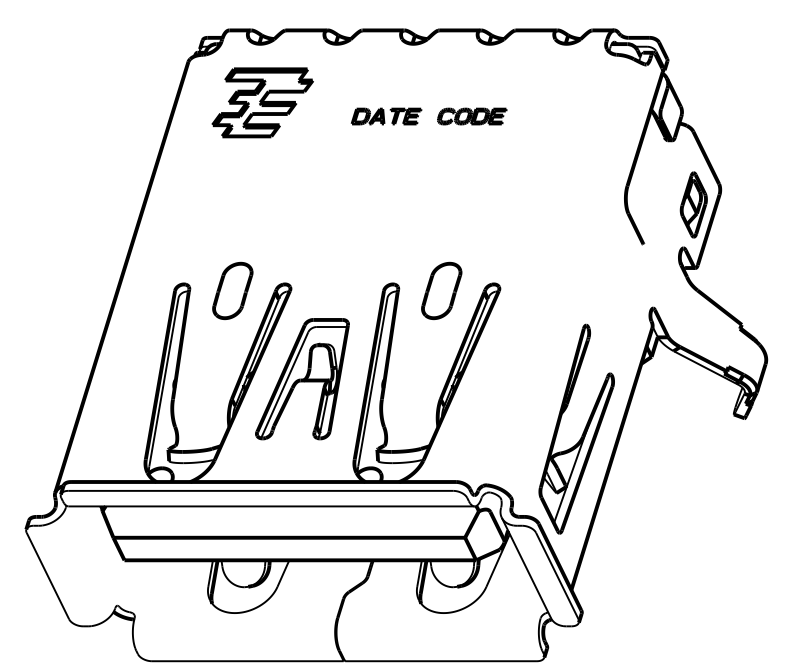
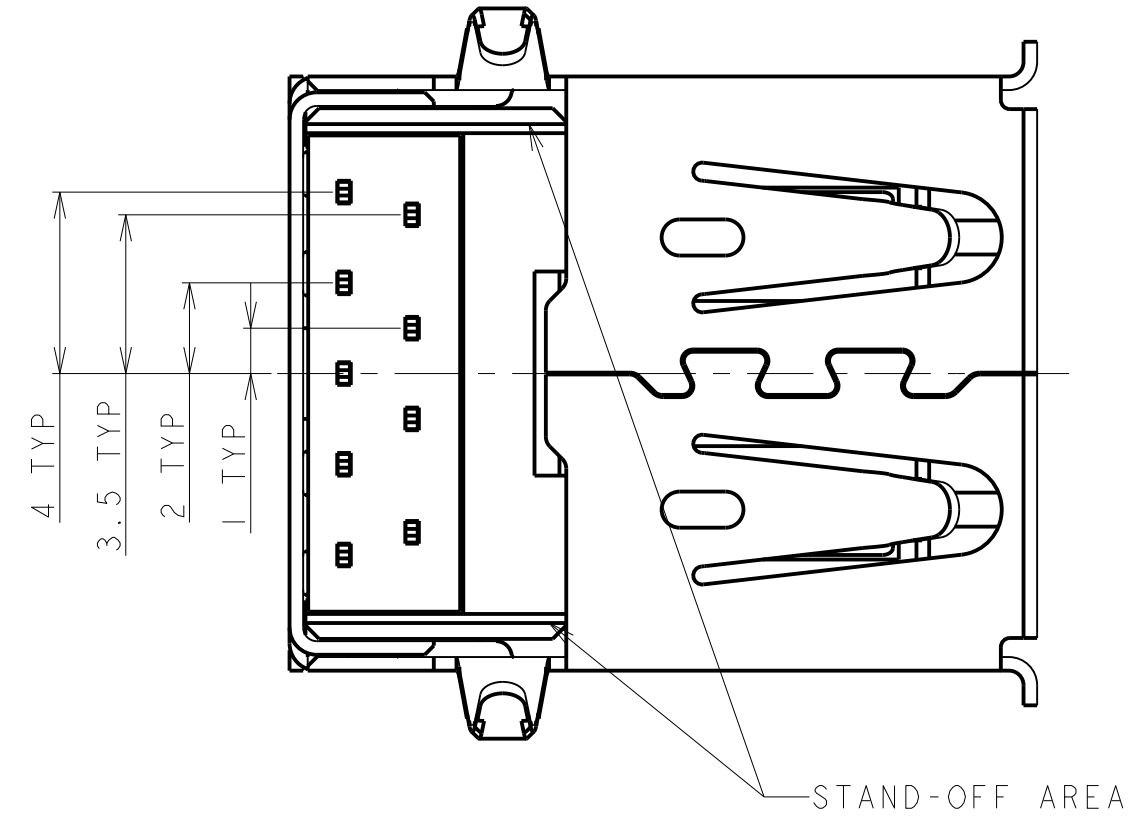
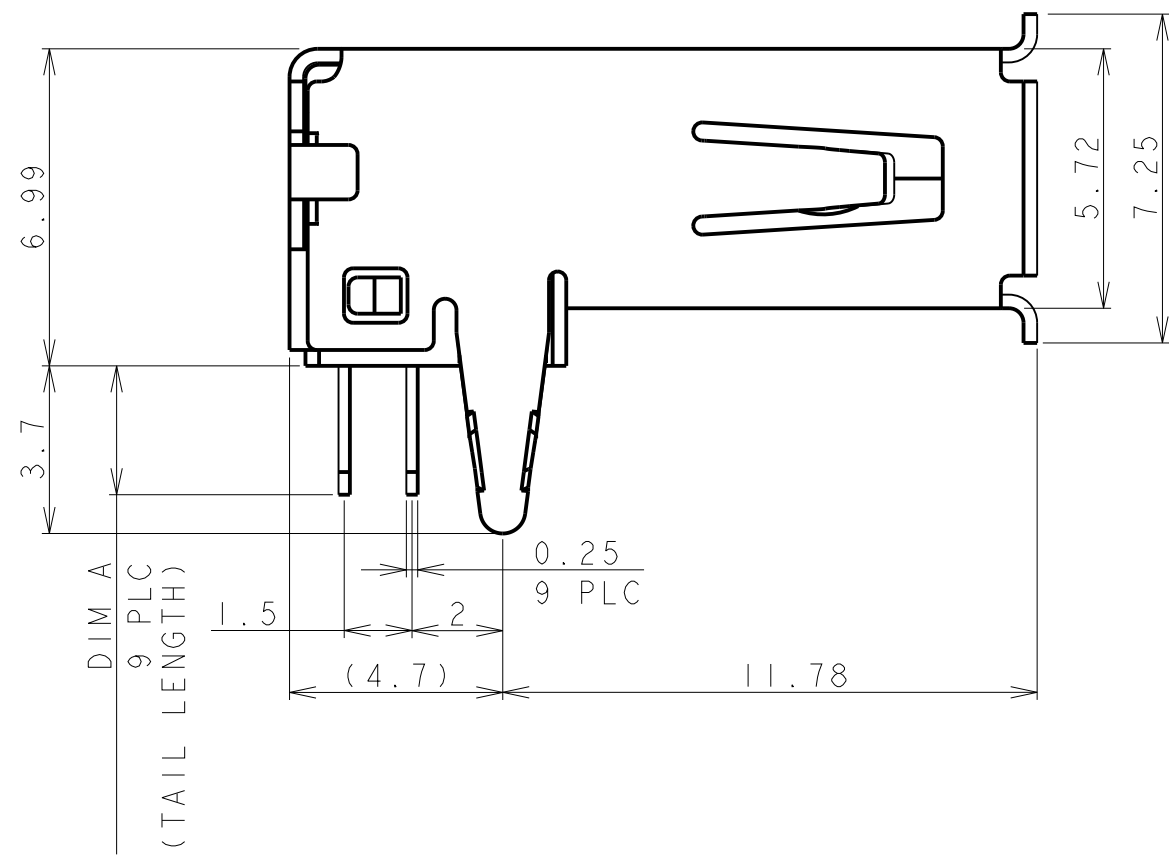


D

C


B

A

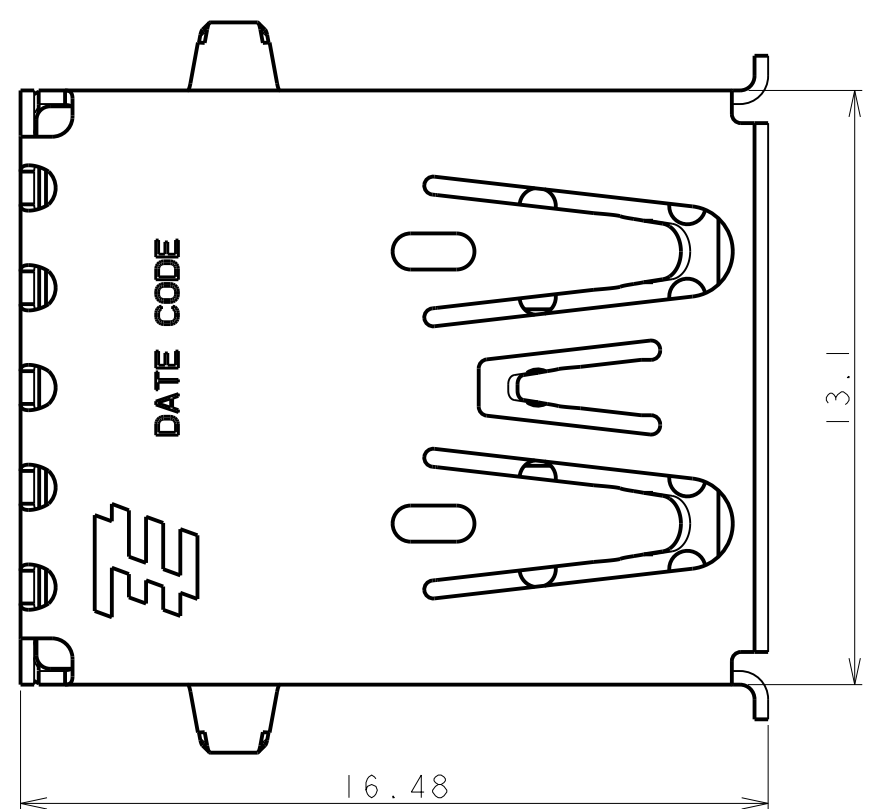

MATING VIEW.

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A2	REVISED PER ECO-11-005033	15APR11	RK	HMR
			B	REVISED PER ECR-14-012319	18SEP2014	F.L	J.L
			-	-	-	-	-
			-	-	-	-	-

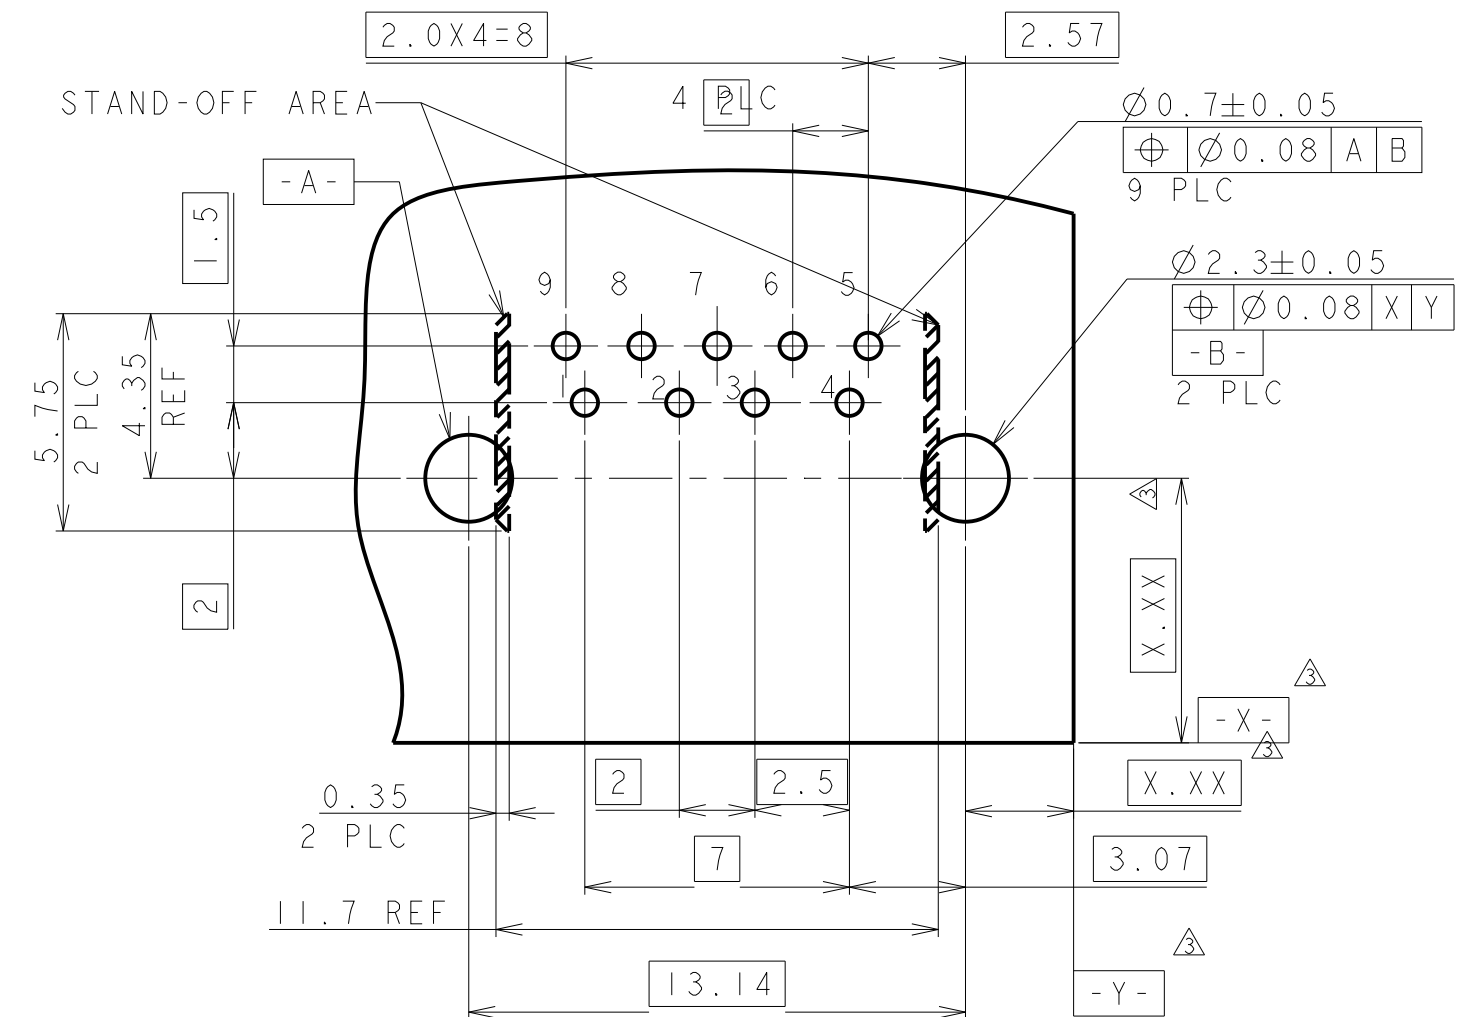

NOTE:
△ MATERIAL:
SHELL AND CONTACTS: COPPER ALLOY
HOUSING: THERMOPLASTIC, BLUE, UL94-HB.
△ PLATING:
CONTACT: GOLD FLASHED OVER 0.76um MIN Pd-Ni PLATING ON MATING AREA, 2.54um MIN MATTE TIN ON SOLDER TAILS, 1.27um MIN NICKEL UNDER PLATING.
SHELL: TIN OVER NICKEL PLATING
△ DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
△ RECOMMENDED PC BOARD THICKNESS OF 1.60.
△ PLATING:
CONTACT: 0.76um MIN GOLD PLATING ON MATING AREA, 2.54um MIN. MATTE TIN ON SOLDER TAILS, 1.27um MIN NICKEL UNDER PLATING.
SHELL: TIN OVER NICKEL PLATING
△ THIS PART IS PRELIMINARY.
△ MATERIAL:
SHELL AND CONTACTS: COPPER ALLOY
HOUSING: THERMOPLASTIC, BLUE, UL94V-0.
8. PIN ASSIGNMENT:

PIN NO.	1	2	3	4	5	6	7	8	9
SIGNAL NAME	VBUS	D-	D+	GND	STDA_SSRX-	STDA_SSRX+	GND_DRAIN	STDA_SSTX-	STDA_SSTX+
REMARK	USB 2.0 CONTACT PIN				USB 3.0 CONTACT PIN				

2.84	△	△	1-1932258-2	△
2.84	△	△	1932258-2	
2.84	△	△	1-1932258-1	△
2.84	△ OR △	△	1932258-1	
DIM A	FINISH	MATERIAL	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL
△

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±0.25
1 PLC	±0.25
2 PLC	±0.25
3 PLC	±
4 PLC	±
ANGLES	±3°
FINISH	

DWN
FRANCIS LEE
19SEP2010

CHK
MARTIN LEE
19SEP2010

APVD
STEVEN YAO
19SEP2010

PRODUCT SPEC
108-115001

APPLICATION SPEC
501-115002

WEIGHT
-

Customer Drawing

TE Connectivity

NAME
-

SIZE
A2

CAGE CODE
0779

DRAWING NO
C-1932258

RESTRICTED TO
-

SCALE
NTS

SHEET
1

OF
1

REV
B