
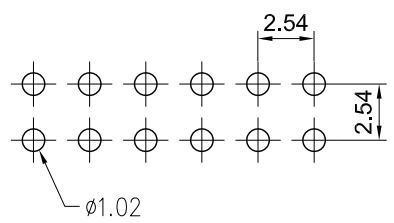


Rev	Modification	Date	Validate

ROHS

**Recommended
P.C. Board Hole Layout**



Specifications
 Current Rating : 3 Amps
 Insulator Resistance : 1000 Megohms min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 600V
 Operating Temperature : -40°C ~ +105°C
 Contact Material : Brass
 Insulator Material : Polyester, UL 94V-0 P.B.T.
 Contact Plated : Standard:Full Gold Flash

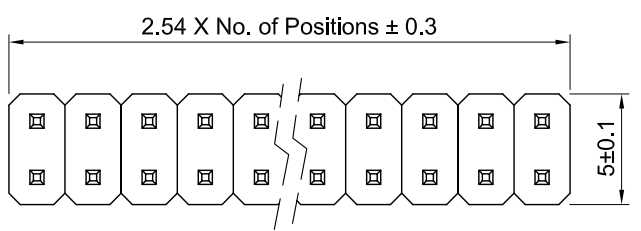

Order Information

2 1 3 1 - A 1 - S 2 x x - x x G A

Serial Type —
 Terminal Type — S : Staright Type
 Row Type — 2 : Dual Row
 No. of Pin per Row —
 Terminal Dim. — AA : A=6.1mm, C=6.1mm
 Contact Plating — GA : Gold Flash

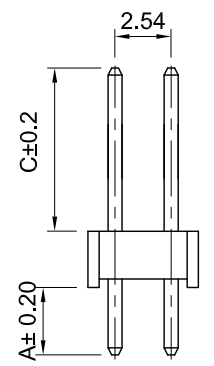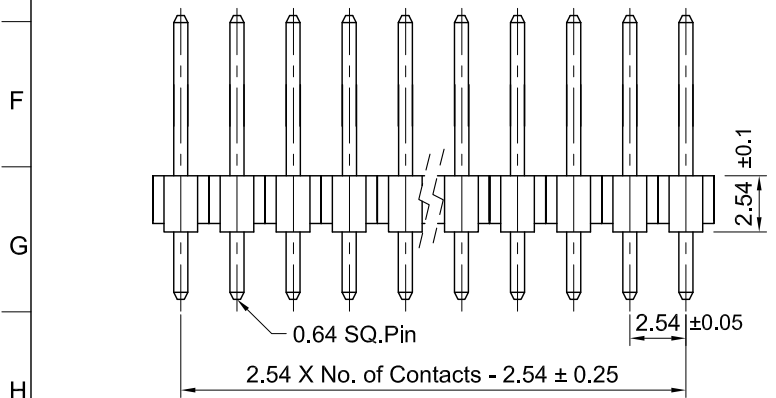

GENERAL TOLERANCE		單位 (UNIT)	料號 (PART NO.)	圖號 (DWG NO.)	名稱 (TITLE): Pin Header P:2.54 X 2.54mm H:2.54mm,Dual Row,Straight Type		
X ± 0.50	X ° ± 5°	mm	2131-A1-S2xx-xxGA	2131-A11			
.X ± 0.20	.X ° ± 2°	審核 (APPROVAL)	核對 (CHECKED)	製圖 (DRAWN)		比例 SCALE 3:1	張數 SHEET 1/1
.XX ± 0.10	.XX ° ± 1°	James 13-08-15	Huang 03-08-15	Fen-Fen 05-03-08		角法 PROJ.	更改 REV. A
DATE	S5V1						