

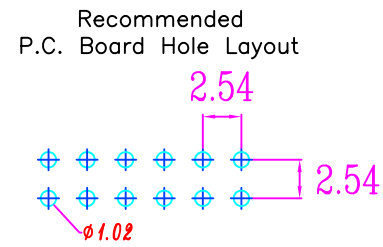


1 2 3 4 5 6 7

A

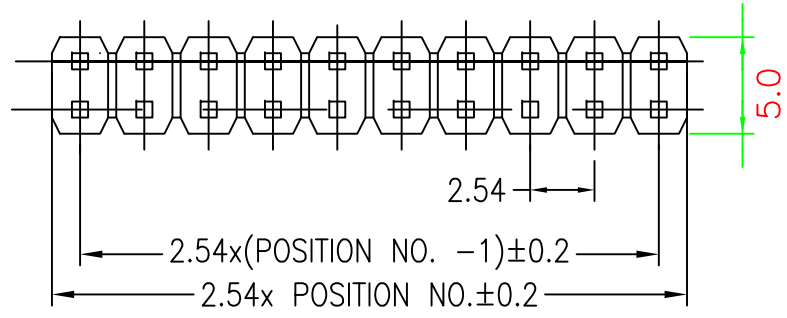


NOTE :4 ~80 POSITION

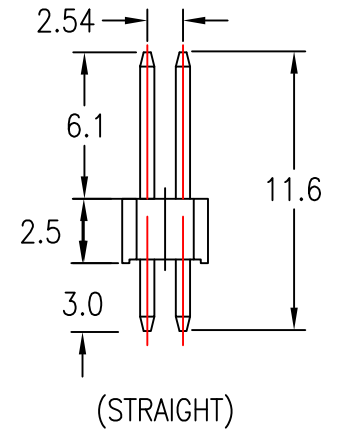

A

B

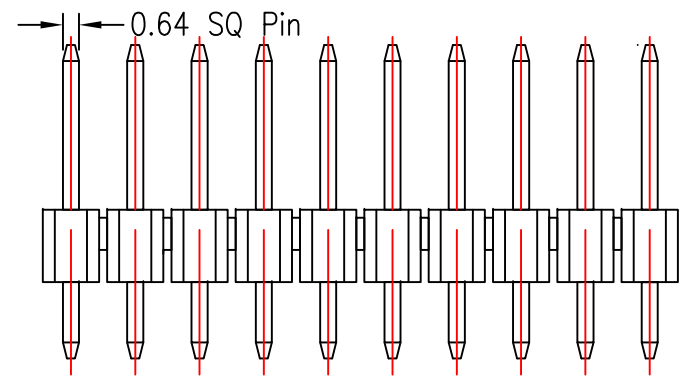

B

C

PN:2131-xxSE
 POSITION _____
 xx=(2*xxPIN)
 04PIN~80PIN
 TYPE _____
 S:STRAIGHT(180D)

C

D

Specifications:
 Insulator Material:PBT &30% Glass Fiber(UL 94V-0)
 Contact Resistance: 20m ohms max at DC 100mA
 Insulator Resistance: 1000M ohms min at dc 500V
 Current Rating: 1 AMP
 Dislectriv Withstanding Voltage:AC 500V For 1minute
 Temperature Rating: -40°C ~ +85°C
 Contact Material: Phosphor Brass
 RaHS

D

E

2131D2*5GSE

PROJ SCALE : F DO NOT SCALE DWG DWG NO.2131-S00

GENERAL TOLERANCE ± 0.20	APP	James	01-04-14	TITLE P/H xxP(2*N) Pitch:2.54mm 180D RoHS TYPE	REV. X5
	CHK	Shirley	29-04-13		
	DRW	Huang	02-01-12	UNIT MM	SHT 1 OF 1

E

1 2 3 4 5 6 7