


**Recommended P.C.Board  
Hole Layout**

NOTE: 2~40 POSITION

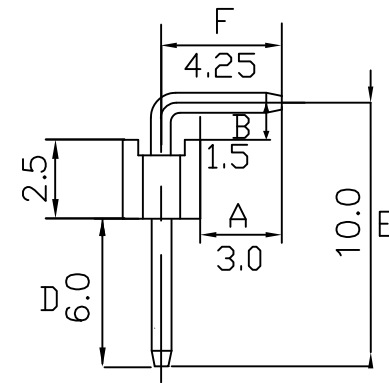

**SPECIFICATIONS:**

**ELECTRICAL:**

- Current Rating: 3 Amps.
- Insulator Resistance: 1000 Megohms min.
- Contact Resistance: 20 m ohms max.
- Dielectric Withstanding: AC 600V.

**MATERIAL:**

- Contact Material: Brass.
- Insulator Material: Polyester, UL 94V-0.
- Standard: P.B.T
- Finish: Gold ,Tin.
- Standard: Gold Flash All Over.

Operation Temperature: -40°C TO +105°C

Order Information

PART NO. 213A-xxRE-02

213A TYPE


PIN TYPE

No of Contacts 2~40

02: (A=3.0,B=1.5,D=6.0)

(E=10.0,F=4.25)

RoHS

		PROJ 		SCALE : F DO NOT SCALE DWG		TITLE P/H 1*N 2.54mm 90D RoHS	
GENERAL TOLERANCE ± 0.20	APP	CHEN	13-07-18	DWG NO.213A-102		REV. X8	
	CHK	HUANG	02-07-18	UNIT MM		SHT 1 OF 1	
	DRW	HUANG	22-02-12				