





ROHS

Rev	Modification	Date	Validate
-----	--------------	------	----------

Specifications

Current Rating : 1 Amp
 Insulator Resistance : 1000 Megohms min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 300V
 Operating Temperature : -40°C ~ +105°C
 Contact Material : Brass
 Insulator Material : Polyester, UL 94V-0 Nylon-6T
 Contact Plated :
 Standard: Full Gold Flash
 RoHS

Recommended P.C. Board Hole Layout

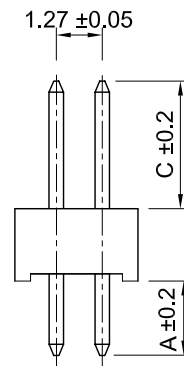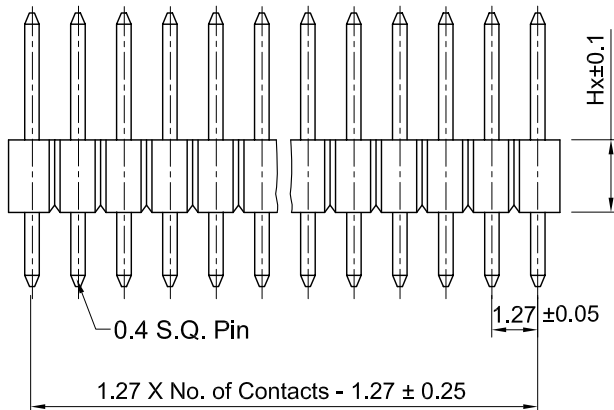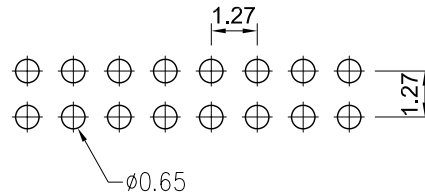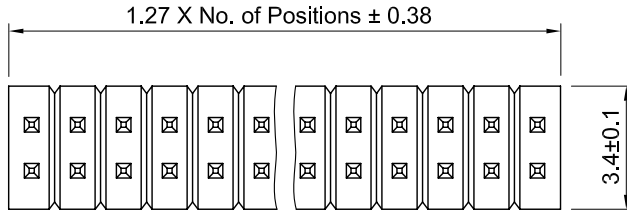

Order Information

2 1 4 2 - B 1 H x - S 2 x x - x x G A - 0

Serial No. _____

Housing Height : _____

- H1: 1.0mm
- H2: 2.0mm
- H3: 1.5mm
- H5: 2.5mm
- H8: 1.7mm

No. of Contact Per Row _____

Terminal Dim. _____

- 01. A=.... ,C=....
- 02. A=.... ,C=....
- 03. A=.... ,C=....

GENERAL TOLERANCE		單位 (UNIT)	料號 (PART NO.)	圖號 (DWG NO.)		
X . ± 0.50	X . ° ± 5°	mm	2142-B1Hx-S2xx-xxGA-0	2142-B11		
. X ± 0.20	. X ° ± 2°	審核 (APPROVAL)	核對 (CHECKED)	製圖 (DRAWN)	比例 SCALE	張數 SHEET
. X X ± 0.10	. X X ° ± 1°	James	Huang	Alice	3:1	1/1
DATE:2008/03/05	SSV2	02-07-12	02-05-12		更改 REV.	A_1
					名稱 (TITLE):	
					Pin Header P:1.27 X 1.27mm H:x.xmm, Dual Row, Straight Type	