
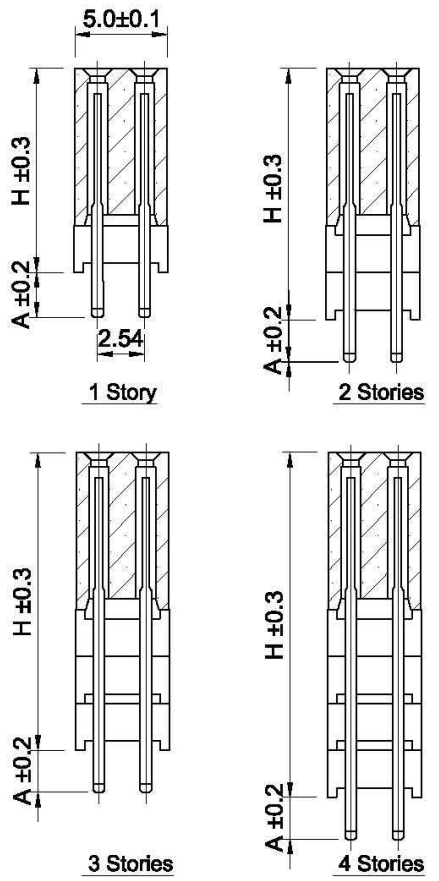
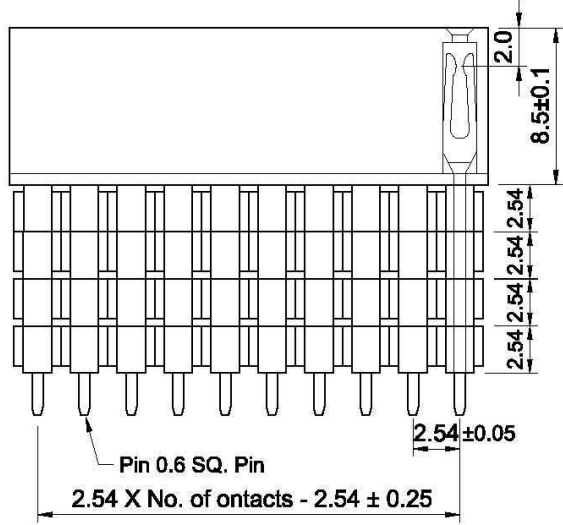
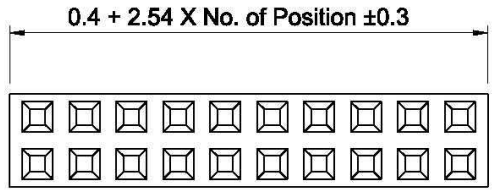


RoHS

Recommended P.C. Board Hole Layout

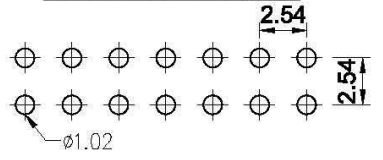

Rev	Modification	Date	Validate
-----	--------------	------	----------

Specifications
 Current Rating : 3 Amps
 Insulator Resistance : 1000 Megohms min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 600V
 Operating Temperature : -40°C ~ +105°C
 Contact Material : Brass
 Insulator Material : Polyester, UL 94V-0 P.B.T.
 Contact Plated : Standard:Full Gold Flash

Order Information

2 1 6 0 - A 6 - S 2 XX - XXX XX

- Serial Type
- Terminal Option
S : Straight Type
- Row Option
2 : Dual Row
- No. of Pin Per Row
- Elevated Story Option
- See Option
- Contact Plating
GA : Gold Flash

Option

Elevated Story Option	H	A	Elevated Story Option	H	A
1EA	11.04	7.38	3EA	16.12	2.30
1EB	11.04	12.20	3EB	16.12	7.10
1EC	11.04	2.30			
2EA	13.58	4.84	4EA	18.66	4.60
2EB	13.58	9.65			

GENERAL TOLERANCE		單位 (UNIT)	料號 (PART NO.)	圖號 (DWG NO.)		
X ± 0.50	X * ± 5 *	mm	2160-A6-S2xx-xxxGA	2160-A64		
X ± 0.20	X * ± 2 *	審核 (APPROVAL)	校對 (CHECKED)	製圖 (DRAWN)	比例 (SCALE)	張數 (SHEET)
.X X ± 0.10	.X X * ± 1 *	James	Huang	Fen-Fen	3:1	1/1
DATE	SCM1	09-07-16	01-07-15	02-12-10	圖號 (TITLE)	
						Female Header P2.54mm
						Elevated Story, Doul Row, Straight Type