



1 2 3 4 5 6 7

Specifications:


- \* Current Rating: 3A
- \* Insulation Resistance: 5000 Megohms min.  
500V DC for 1 minutes.
- \* Withstand Voltage: AC 500V for 1 minutes.  
-40°C+105°C
- \* Temperature Range: Phosphor Bronze.
- \* Contact Material: Polyester, UL94V-0
- \* Insulator Material: Standard: P.B.T.
- \* Tolerance±0.2




OPEN






CLOSE




B Type



A Type

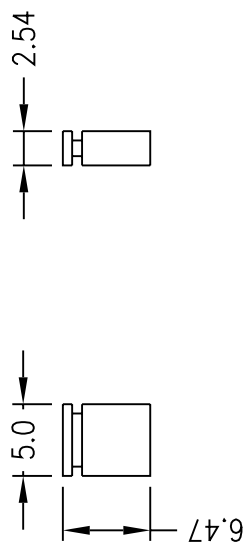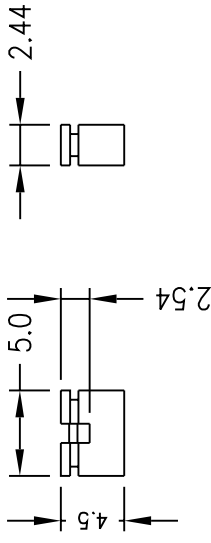

D Type

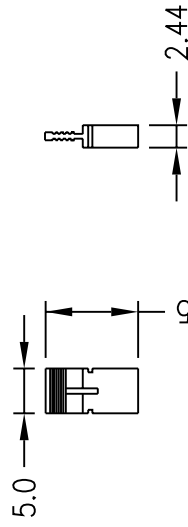

Application And Features:

- \* Easiest way of programming by simply connecting contact points together.
- \* Easy applied—No soldering.
- \* All side stackable.
- \* Low cost alternative to DIP switch.
- \* Mate with 2.54mm grid male header connectors.

PROJ		SCALE : F	MOLD NO	2180
APP		DO NOT SCALE DWG		
CHK	CCJ	91.11.04	MODEL	FILE NO
DGN	AMY	89.11.01	P:2.54mm	MINI JUMPER
DRW	SHIEH	89.11.01	UNIT	MM
				SHT 1 OF 1
				SIZE A4
				REV. X1

A

B

C

D

E

1 2 3 4 5 6 7