



1 2 3 4 5 6 7


A A

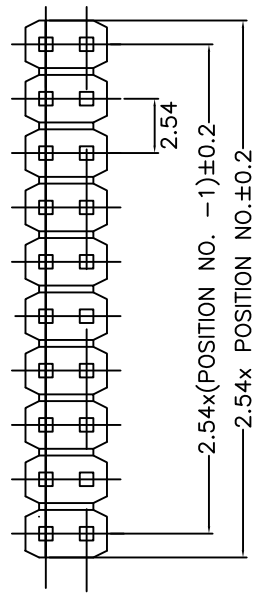

B B

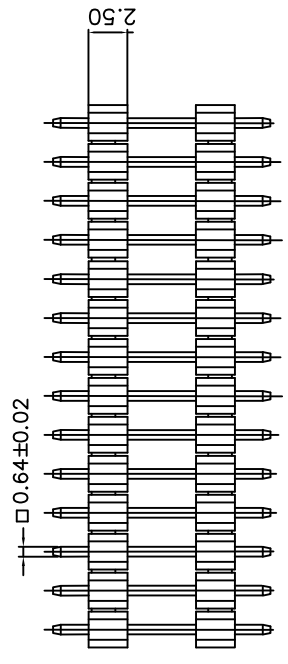

C C

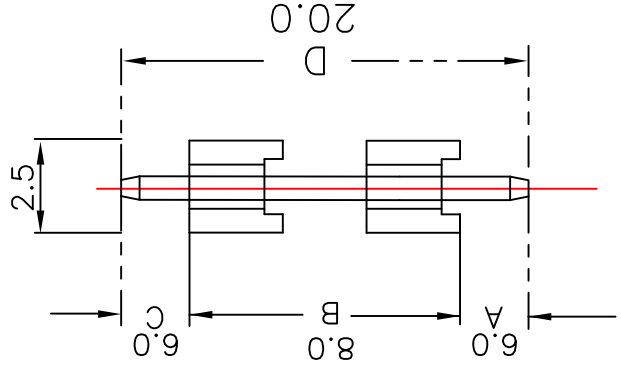

D D

Order Information

PART NO. 2131-2xxxSDE20 PIN TYPE  
 Pitch 2.54 Dual Row  
 No of Contacts 2~40  
 RoHS

Specifications:

Insulator Material: PBT & 30% Glass Fiber(UL 94V-0)  
 Contact Resistance: 20m ohms Max at DC 100mA  
 Insulator Resistance: 1000M ohms Min at DC 500 V  
 Current Rating: 1 Amps  
 Dielectric Withstanding Voltage: AC 500V For 1 minute  
 Temperature Rating: -40°C ~ + 85°C  
 Contact Material: Phosphor Brass  
 RoHS

E E

PROJ	SCALE : F DO NOT SCALE DWG	TITLE	
		James	Pitch 2.54 Dual Row Dual Housing Type
APP	15-10-14	DWG NO.2131-SDA	REV. X1
CHK	01-10-14	UNIT MM	SIZE A4
DRW	03-01-12	SHT 1 OF 1	

GENERAL TOLERANCE ± 0.20

1 2 3 4 5 6 7