

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://download.phoenixcontact.com)



Fuse terminal block for assembly on NS 35, for 5 x 20 cartridge fuse inserts

Why buy this product

- An extremely compact design
- ▼ Tested for railway applications



Key commercial data

Packing unit	50 pc	
GTIN	4 046356 056137	
Weight per Piece (excluding packing)	17.63 g	
Custom tariff number	85369085	
Country of origin	China	

Technical data

General

Note	The current is determined by the fuse used, the voltage by the light indicator.	
Number of levels	1	
Number of connections	2	
Color	black	
Insulating material	PA	
Inflammability class according to UL 94	V0	
Area of application	Railway industry	
	Mechanical engineering	
	Plant engineering	
Fuse	G / 5 x 20	
Fuse type	Glass	
Rated surge voltage	6 kV	



Technical data

General

Pollution degree	3		
Surge voltage category	III		
Insulating material group	I		
Connection in acc. with standard	IEC 60947-7-3		
Nominal current I _N	6.3 A		
Nominal voltage U _N	500 V		
Power loss	max. 1.6 W (With single arrangement of the fuse terminal block in the event of overload)		
	max. 1.6 W (With interconnected arrangement of several fuse termina blocks in the event of overload)		
	max. 4 W (With single arrangement of the fuse terminal block in the event of a short-circuit)		
	max. 2.5 W (With interconnected arrangement of several fuse terminal blocks in the event of a short-circuit)		
Open side panel	ja		

Dimensions

Width	6.2 mm
Length	82.5 mm
Height NS 35/7,5	64.9 mm
Height NS 35/15	72.4 mm

Connection data

Conductor cross section solid min.	0.5 mm²
Conductor cross section solid max.	2.5 mm²
Conductor cross section stranded min.	0.5 mm ²
Conductor cross section stranded max.	2.5 mm²
Conductor cross section AWG/kcmil min.	20
Conductor cross section AWG/kcmil max	14
Connection method	Quick connection
Max. wire diameter incl. insulation	3.8 mm

Classifications

eCl@ss

eCl@ss 4.0	27141116
eCl@ss 4.1	27141116
eCl@ss 5.0	27141116
eCl@ss 5.1	27141116
eCl@ss 6.0	27141116
eCl@ss 7.0	27141116
eCl@ss 8.0	27141116



Classifications

ETIM

ETIM 2.0	EC000897
ETIM 3.0	EC000899
ETIM 4.0	EC000899
ETIM 5.0	EC000899

UNSPSC

UNSPSC 6.01	30211811
UNSPSC 7.0901	39121410
UNSPSC 11	39121410
UNSPSC 12.01	39121410
UNSPSC 13.2	39121410

Approvals

Approvals


Approvals

 ${\tt CSA/UL\ Recognized/KEMA-KEUR/cUL\ Recognized/GL/BV/DNV/ABS/NK/IECEE\ CB\ Scheme/cULus\ Recognized/BV/DNV/ABS/NK/IECEE\ CB\ Scheme/CULus\ Recognized/BV/DNV/ABS/NK/ABS/$

Ex Approvals

Approvals submitted

Approval details

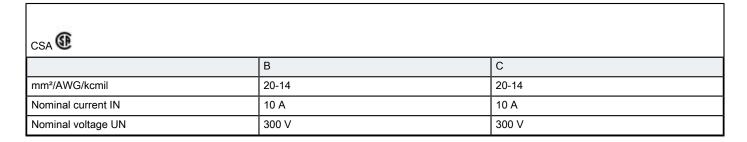

UL Recognized 9				
		В	С	D
mm²/AWG/kcmil	20-14	20-14	20-14	20-14
Nominal current IN	15 A	15 A	15 A	10 A



Approvals

		В	С	D
Nominal voltage UN	300 V	300 V	150 V	300 V

KEMA-KEUR KETA	
mm²/AWG/kcmil	0.5-2.5
Nominal current IN	6.3 A
Nominal voltage UN	250 V

cUL Recognized				
		В	С	D
mm²/AWG/kcmil	20-14	20-14	20-14	20-14
Nominal current IN	15 A	15 A	15 A	10 A
Nominal voltage UN	300 V	300 V	150 V	300 V

l GL		

	_
	ı
BV	1
<u>-</u>	ı

DNV	
LDINV	

		_
_	BS	ı
I A		L

NK NK

ECEE CB Scheme CB	
mm²/AWG/kcmil	0.5-2.5
Nominal current IN	6.3 A
Nominal voltage UN	250 V

	ĺ
	ĺ
cULus Recognized • Sus	ĺ
COLUS Recognized	ĺ



Accessories

Accessories

Bridge

Connection pin - VS - 3004207



Connection pin, Length: 1000 mm, Color: gray

Plug-in bridge - FBS 2-6 - 3030336



Plug-in bridge, Number of positions: 2, Color: red

Plug-in bridge - FBS 3-6 - 3030242



Plug-in bridge, Number of positions: 3, Color: red

Plug-in bridge - FBS 4-6 - 3030255



Plug-in bridge, Number of positions: 4, Color: red

Plug-in bridge - FBS 5-6 - 3030349



Plug-in bridge, Number of positions: 5, Color: red



Accessories

Plug-in bridge - FBS 10-6 - 3030271



Plug-in bridge, Number of positions: 10, Color: red

Plug-in bridge - FBS 20-6 - 3030365



Plug-in bridge, Number of positions: 20, Color: red

Plug-in bridge - FBS 50-6 - 3032224



Plug-in bridge, Number of positions: 50, Color: red

Documentation

Mounting material - QTC-IL - 3039926

Operating decal for the QTS terminal block



End block

End clamp - CLIPFIX 35 - 3022218



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray



Accessories

End clamp - CLIPFIX 35-5 - 3022276



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

End clamp - E/NS 35 N - 0800886



End clamp, width: 9.5 mm, color: gray

End cover

End cover - D-QTC 2,5-TWIN - 3206571



End cover, Length: 82.5 mm, Width: 2.2 mm, Color: gray

Spacer plate - DP PS-6 - 3036738



Spacer plate, Color: red

Labeled terminal marker

Zack marker strip - ZB 5 CUS - 0824962



Zack marker strip, Can be ordered: Strip, white, Labeled according to customer specifications, Mounting type: Snap into tall marker groove, For terminal block width: 5.2 mm, Lettering field: 5.15 x 10.5 mm



Accessories

Marker for terminal blocks - UC-TM 5 CUS - 0824581



Marker for terminal blocks, Can be ordered: By sheet, white, Labeled according to customer specifications, Mounting type: Snap into tall marker groove, For terminal block width: 5.2 mm, Lettering field: 10.5 x 4.6 mm

Marker for terminal blocks - UCT-TM 5 CUS - 0829595



Marker for terminal blocks, Can be ordered: By sheet, white, Labeled according to customer specifications, Mounting type: Snap into tall marker groove, Lettering field: 4.6 x 10.5 mm

Zack Marker strip, flat - ZBF 6 CUS - 0825027



Zack Marker strip, flat, Can be ordered: Strip, white, Labeled according to customer specifications, Mounting type: Snap into flat marker groove, For terminal block width: 6.2 mm, Lettering field: 5.15 x 6.15 mm

Marker for terminal blocks - UC-TMF 6 CUS - 0824646



Marker for terminal blocks, Can be ordered: By sheet, white, Labeled according to customer specifications, Mounting type: Snap into flat marker groove, For terminal block width: 6.2 mm, Lettering field: 5.6 x 5.1 mm

Marker for terminal blocks - UCT-TMF 6 CUS - 0829665



Marker for terminal blocks, Can be ordered: By sheet, white, Labeled according to customer specifications, Mounting type: Snap into flat marker groove, For terminal block width: 6.2 mm, Lettering field: 5.4 x 4.7 mm

Mounting rail



Accessories

DIN rail perforated - NS 35/7,5 PERF 2000MM - 0801733



DIN rail, material: steel galvanized and passivated with a thick layer, perforated, height 7.5 mm, width 35 mm, length: 2000 mm

DIN rail, unperforated - NS 35/7,5 UNPERF 2000MM - 0801681



DIN rail, material: Steel, unperforated, height 7.5 mm, width 35 mm, length: 2 m

DIN rail perforated - NS 35/7,5 WH PERF 2000MM - 1204119



DIN rail 35 mm (NS 35)

DIN rail - NS 35/7,5 WH UNPERF 2000MM - 1204122



DIN rail 35 mm (NS 35)

DIN rail, unperforated - NS 35/7,5 AL UNPERF 2000MM - 0801704



DIN rail, unperforated, Width: 35 mm, Height: 7.5 mm, Length: 2000 mm, Color: silver



Accessories

DIN rail perforated - NS 35/7,5 ZN PERF 2000MM - 1206421



DIN rail, material: Galvanized, perforated, height 7.5 mm, width 35 mm, length: 2 m

DIN rail, unperforated - NS 35/7,5 ZN UNPERF 2000MM - 1206434




DIN rail, material: Galvanized, unperforated, height 7.5 mm, width 35 mm, length: 2 m

DIN rail, unperforated - NS 35/7,5 CU UNPERF 2000MM - 0801762



DIN rail, material: Copper, unperforated, height 7.5 mm, width 35 mm, length: 2 m

End cap - NS 35/7,5 CAP - 1206560





Screwdriver tools

Screwdriver - SZF 1-0,6X3,5 - 1204517



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

Terminal marking



Accessories

Zack marker strip - ZB 5 :UNBEDRUCKT - 1050004



Zack marker strip, Strip, white, Unlabeled, Can be labeled with: Plotter, Mounting type: Snap into tall marker groove, For terminal block width: 5.2 mm, Lettering field: 5.1 x 10.5 mm

Marker for terminal blocks - UC-TM 5 - 0818108



Marker for terminal blocks, Sheet, white, Unlabeled, Can be labeled with: BLUEMARK CLED, BLUEMARK LED, Plotter, Mounting type: Snap into tall marker groove, For terminal block width: 5.2 mm, Lettering field: 10.5 x 4.6 mm

Marker for terminal blocks - UCT-TM 5 - 0828734



Marker for terminal blocks, Sheet, white, Unlabeled, Can be labeled with: THERMOMARK CARD PLUS, THERMOMARK CARD, BLUEMARK CLED, BLUEMARK LED, Mounting type: Snap into tall marker groove, For terminal block width: 5.2 mm, Lettering field: 4.6 x 10.5 mm

Zack Marker strip, flat - ZBF 6:UNBEDRUCKT - 0808710



Zack Marker strip, flat, Strip, white, Unlabeled, Can be labeled with: Plotter, Mounting type: Snap into flat marker groove, For terminal block width: 6.2 mm, Lettering field: 5.15 x 6.15 mm

Marker for terminal blocks - UC-TMF 6 - 0818140



Marker for terminal blocks, Sheet, white, Unlabeled, Can be labeled with: BLUEMARK CLED, BLUEMARK LED, Plotter, Mounting type: Snap into flat marker groove, For terminal block width: 6.2 mm, Lettering field: 5.6 x 5.1 mm



Accessories

Marker for terminal blocks - UCT-TMF 6 - 0828746



Marker for terminal blocks, Sheet, white, Unlabeled, Can be labeled with: THERMOMARK CARD PLUS, THERMOMARK CARD, BLUEMARK CLED, BLUEMARK LED, Mounting type: Snap into flat marker groove, For terminal block width: 6.2 mm, Lettering field: 5.4 x 4.7 mm

Test plug terminal block

Test plugs - PS-4/E - 3036709



Test plugs, Color: red

Test plugs - PAI-4-N GY - 3032871



Test plugs, Color: gray

Test plugs - PS-6 - 3030996



Test plugs, Color: red


Test plugs - PS-6/2,3MM RD - 3038736



Test plugs, Color: red


Drawings



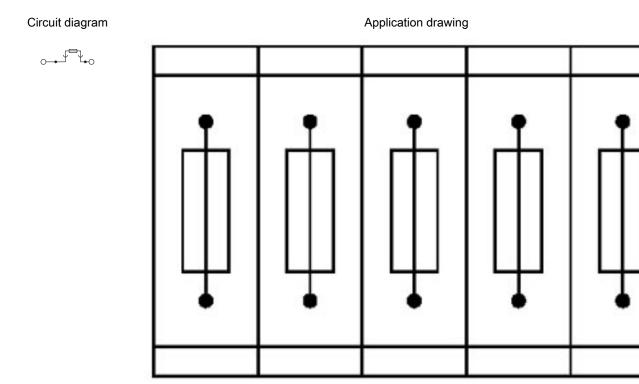

Fuse terminal blocks in interconnected arrangement, block consisting of 5 fuse terminal blocks

Application drawing

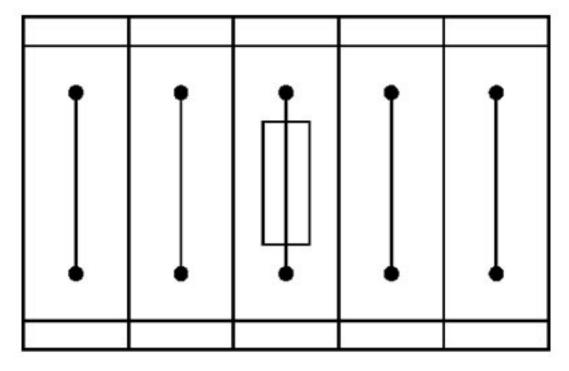

Fuse terminal block in single arrangement,



block consisting of one fuse terminal block and 4 feed-through terminal blocks

Phoenix Contact 2014 © - all rights reserved http://www.phoenixcontact.com