


CIRCUIT

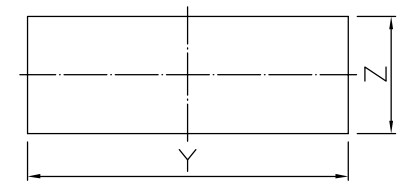

X	Y	Z
0.75~1.25	30.1 +0.1	11.0 +0.1
1.25~2.0	30.2 +0.1	11.0 +0.1
2.0~3.0	30.6 +0.2	11.0 +0.1

X= PANEL THICK

MOUNTING HOLE  
(FOR REFERENCE)

RATING : 16A 125VAC 1/3HP, 16A 250VAC 1/2HP (UL, C-UL)  
 16(6)A 250V~ T125/55 (VDE)

CIRCUIT : ON-OFF (SPST)

INSULATION RESISTANCE: DC 500V 100MΩ OR MORE

DIELECTRIC STRENGTH : Between terminals of open contacts and  
 between terminals of opposite polarity.  
 AC 1500V 1 Min.  
 Between terminals and ground.  
 AC 3000V 1 Min.

CONTACT RESISTANCE : DC 2-4V 1A 20mΩ OR LESS

COLOR : ROCKER- BLACK  
 BODY- BLACK

UL NO: E68037 ENEC/VDE NO: 40028875  
 C-UL NO: E68037 CB NO: DE1-42007

NO. 項目	PART NAME 零件名稱	QTY 數量	MATERIAL 材料	REMARK 備註
材料		無計入尺寸公差	單位 比例	第三共1張
處理		長度±0.5% 角度± 度	m/m 2:1	角法 第1張
描圖		年月日	ROCKER SWITCH	
繪圖	LIN.	140415	品名	
設計			圖	
校對			3073-K5P2C01T1B01C-BA	
核准	李廷杰	140415	名	