


ELECTRICAL CHARACTERISTICS:
 CONTACT CURRENT RATING:1 AMPERES.
 DIELECTRIC WITHSTANDING VOLTAGE:AC 500V R.M.S
 INSULATION RESISTANCE:500 MEGOHMS MINIMUM AT DC 500V
 CONTACT RESISTANCE:30 MILLIOHMS MAXIMUM
 OPERATING TEMPERATURE:-55°C TO 105°C

MECHANICAL CHARACTERISTICS:
 CONTACT INSERTION FORCE: KG MAXIMUM
 CONTACT SEPARATION FORCE: KG MINIMUM

MATERIALS:
 CONTACT:BRASS
 INSULATOR:P.B.T UL94-V0 RATED
 SHELL:COLD ROLLED STEEL

FINISHES:
 CONTACTS:GOLD PLATED 1u",3u",5u",10",15u",30u"
 SHELL:NICKEL PLATED

| | | | | | |
|------|-------|-------------------------------|-------|------------------------|------|
| PROJ | | SCALE : F DO NOT SCALE DWG | | MOLD NO 3211-MS | |
| APP | | | MODEL | FILE NO | REV. |
| CHK | CCJ | 92.05.12 | | USB A FEMALE SOLDER(M) | X1 |
| DGN | AMY | 92.05.12 | UNIT | SHT 1 OF 1 | SIZE |
| DRW | SHIEH | 92.05.12 | MM | | A4 |

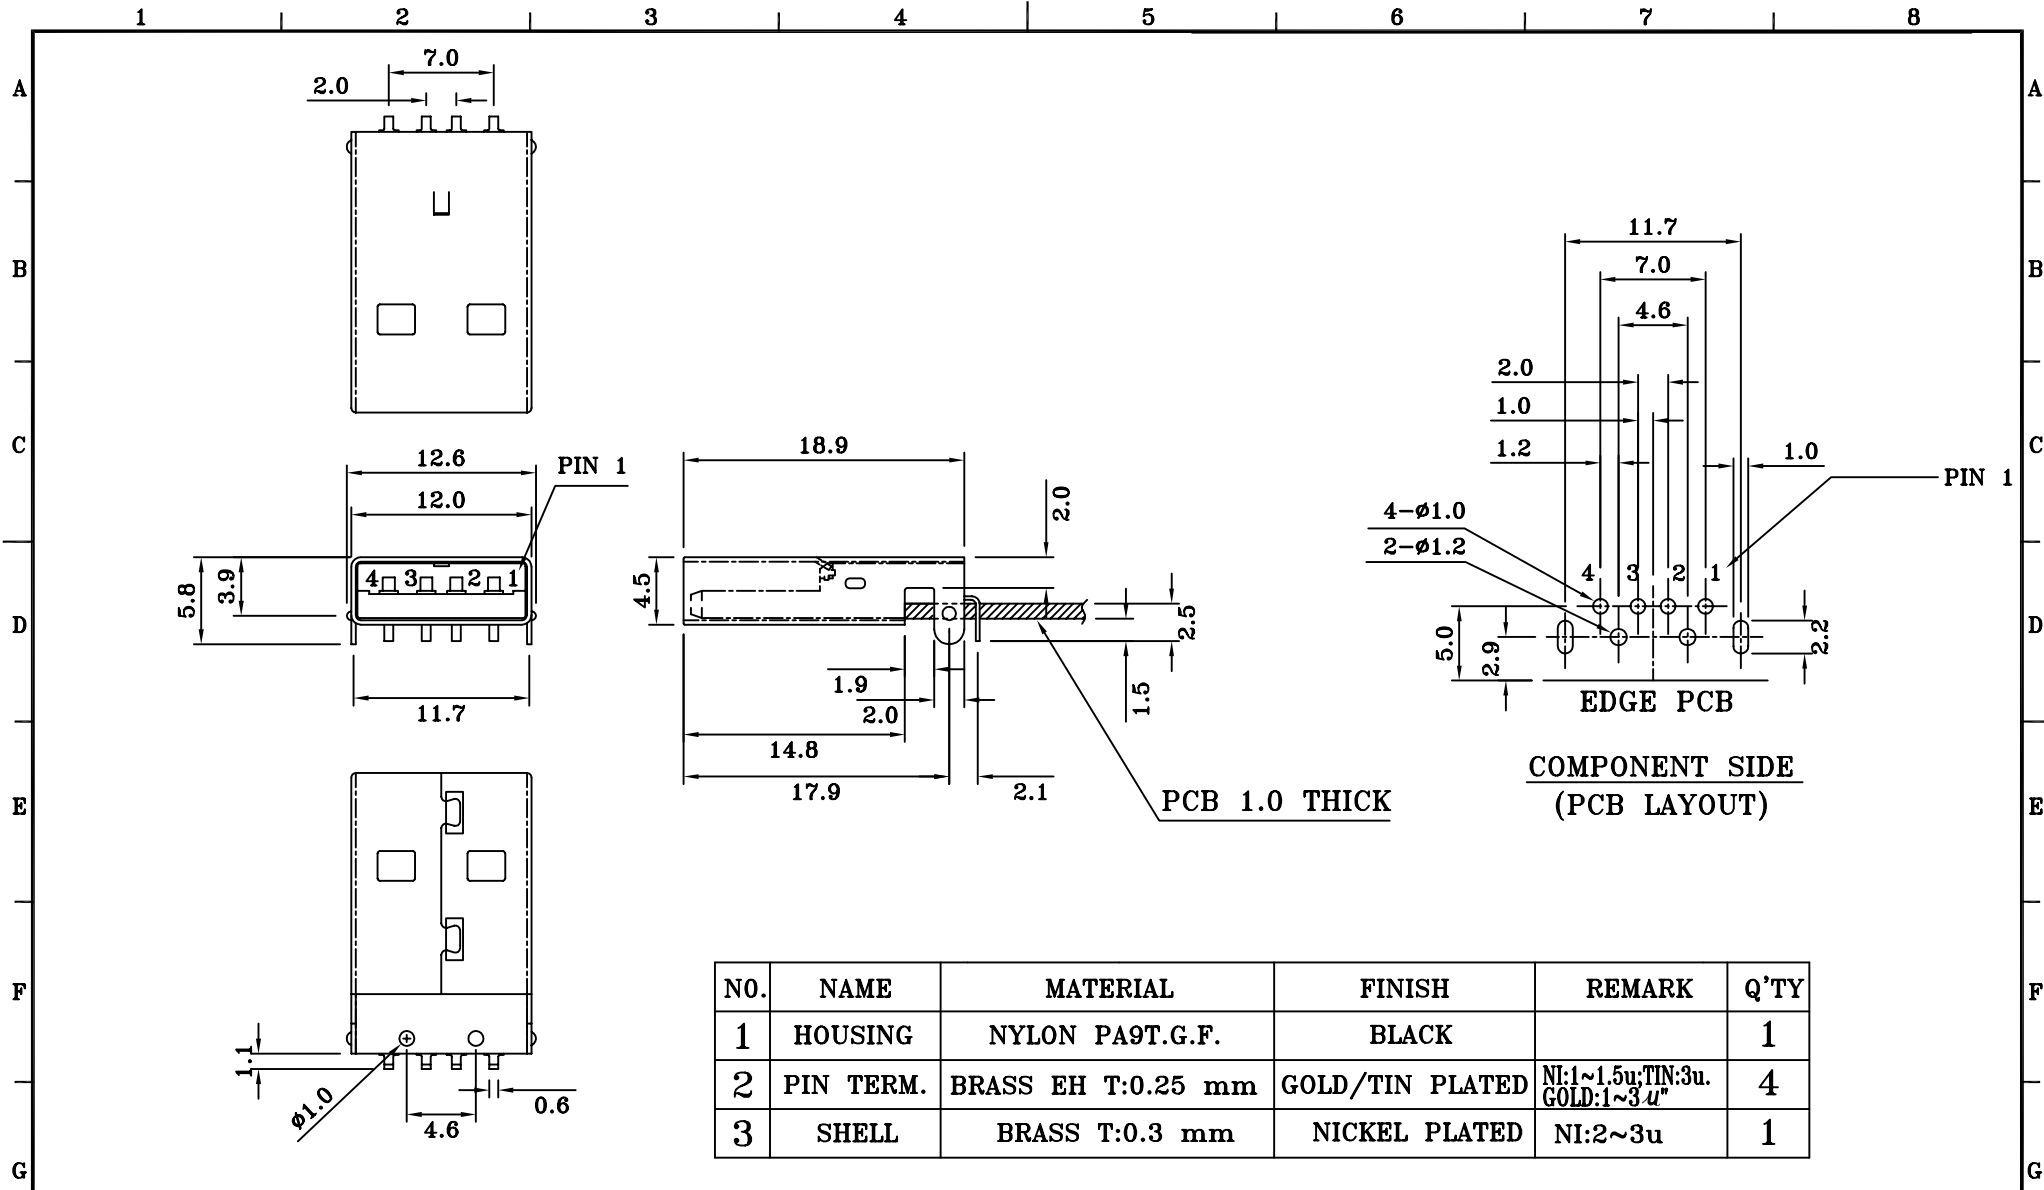

| | | | COMPUTER NO. | | UNIT | SCALE | PART NAME | | |
|-------|----------|-------------|--------------|------|------|----------|---------------------------------|----------|------|
| | | | 3211-APE | | mm | 2:1 | USB. TYPE A PLUG FLAT90° DIP | | |
| | | | APPD. | CKD. | DWG. | DATE | TOLERANCE | PART NO. | REV. |
| MODEL | 3211-APE | PAGE 1 OF 1 | | | AMY | 07-05-06 | ±0.3 | | A |