




LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	00		S1	REVISED PER ECO-11-004820	11MAR11	RK	HMR

D

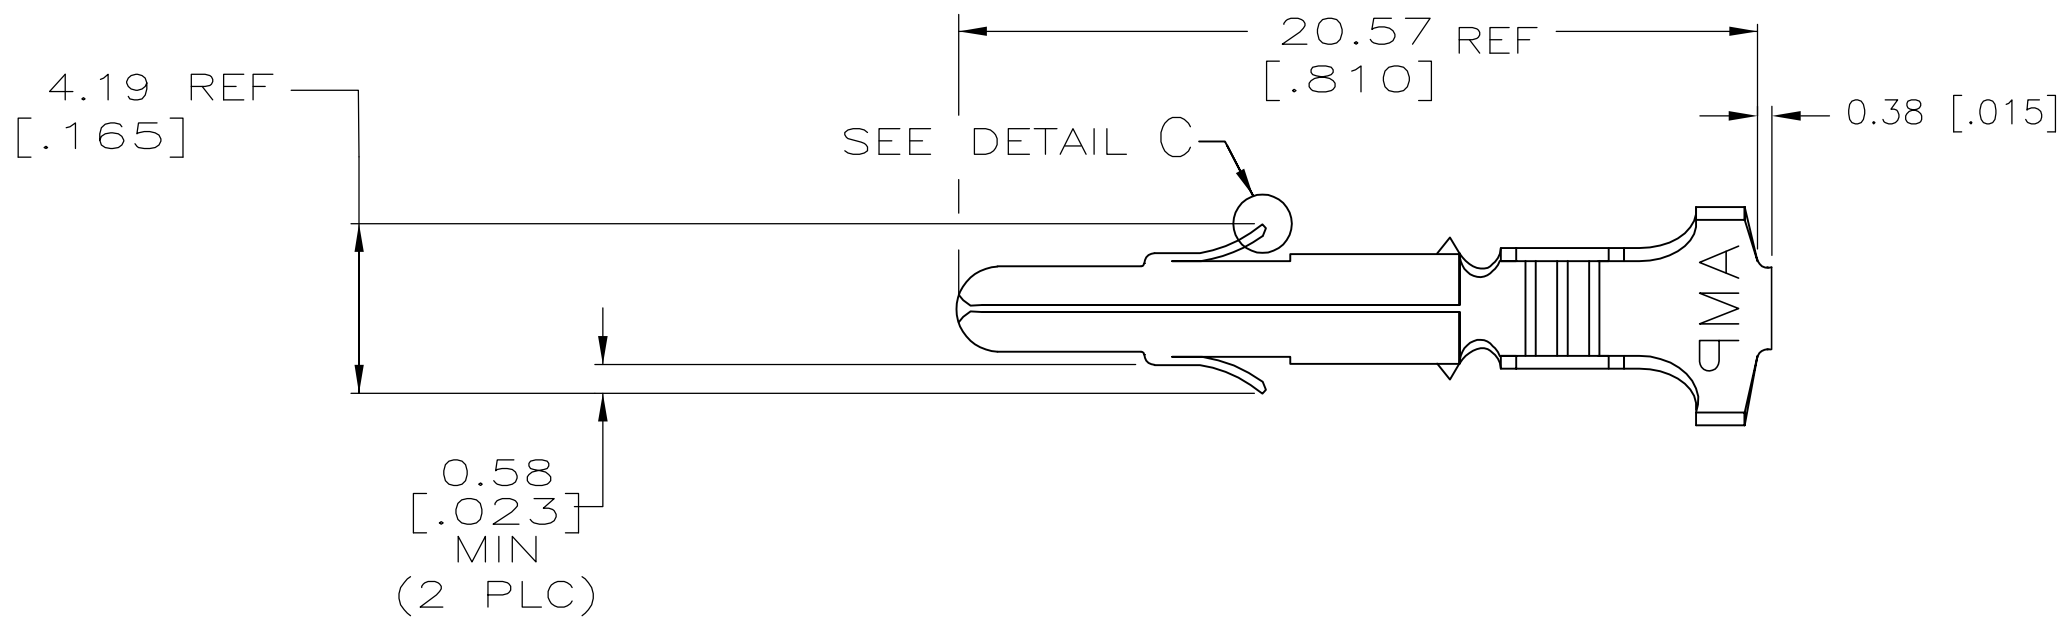


- 1 PLATED WITH 0.00076[.000030] GOLD OVER 0.00127[.000050] MIN THK NICKEL UNDERPLATE.
- 2 GOLD OVER NICKEL ON ENTIRE STAMPING; 0.00076[.000030] GOLD MINIMUM AT OINT OF MEASUREMENT IN CONTACT AREA, GOLD FLASH MINIMUM IN WIRE BARREL.
3. DIMENSIONS IN BRACKETS ARE IN INCHES.
4. WIRE RANGE: 20-14 AWG
INSULATION RANGE : Ø5.08 [.200] MAX

C

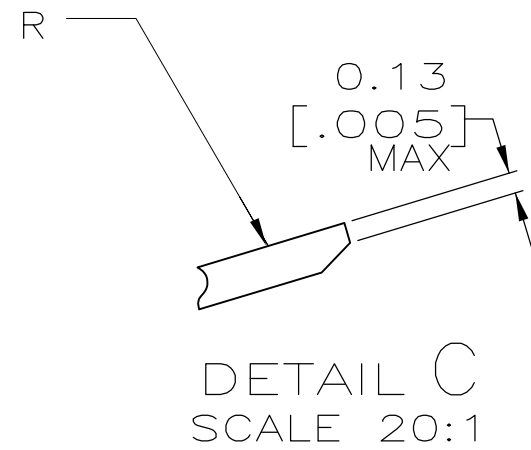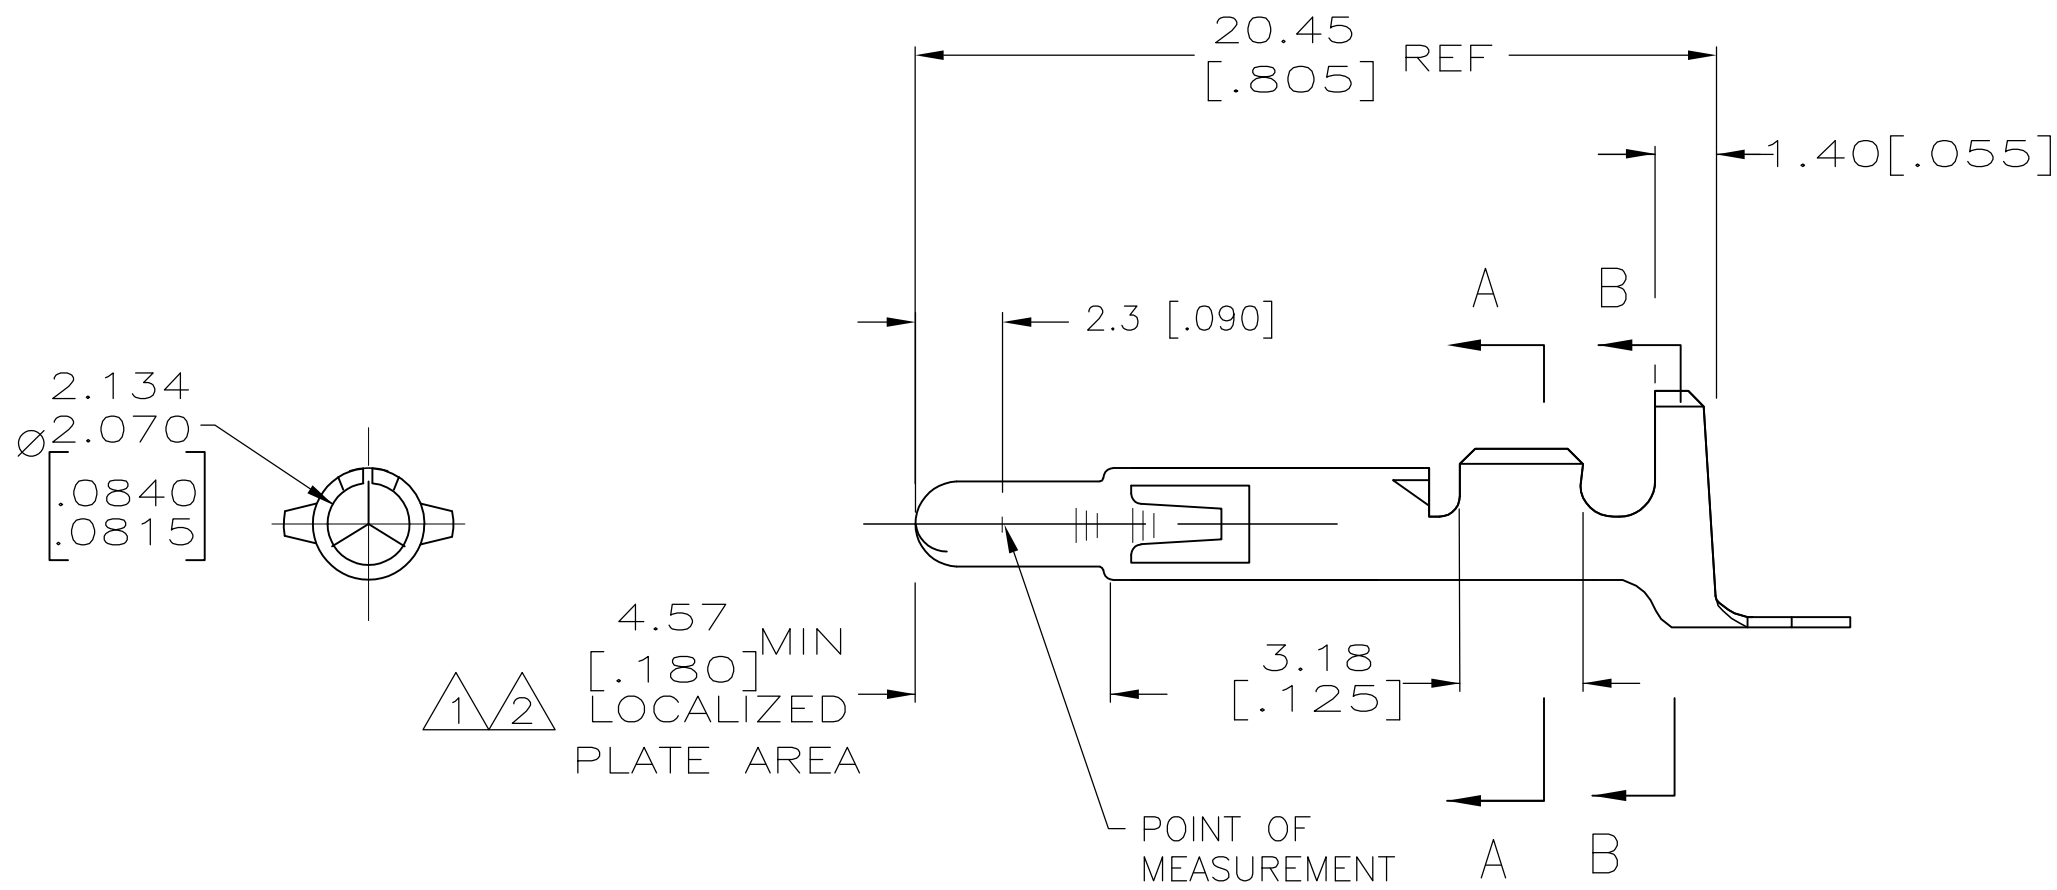

B

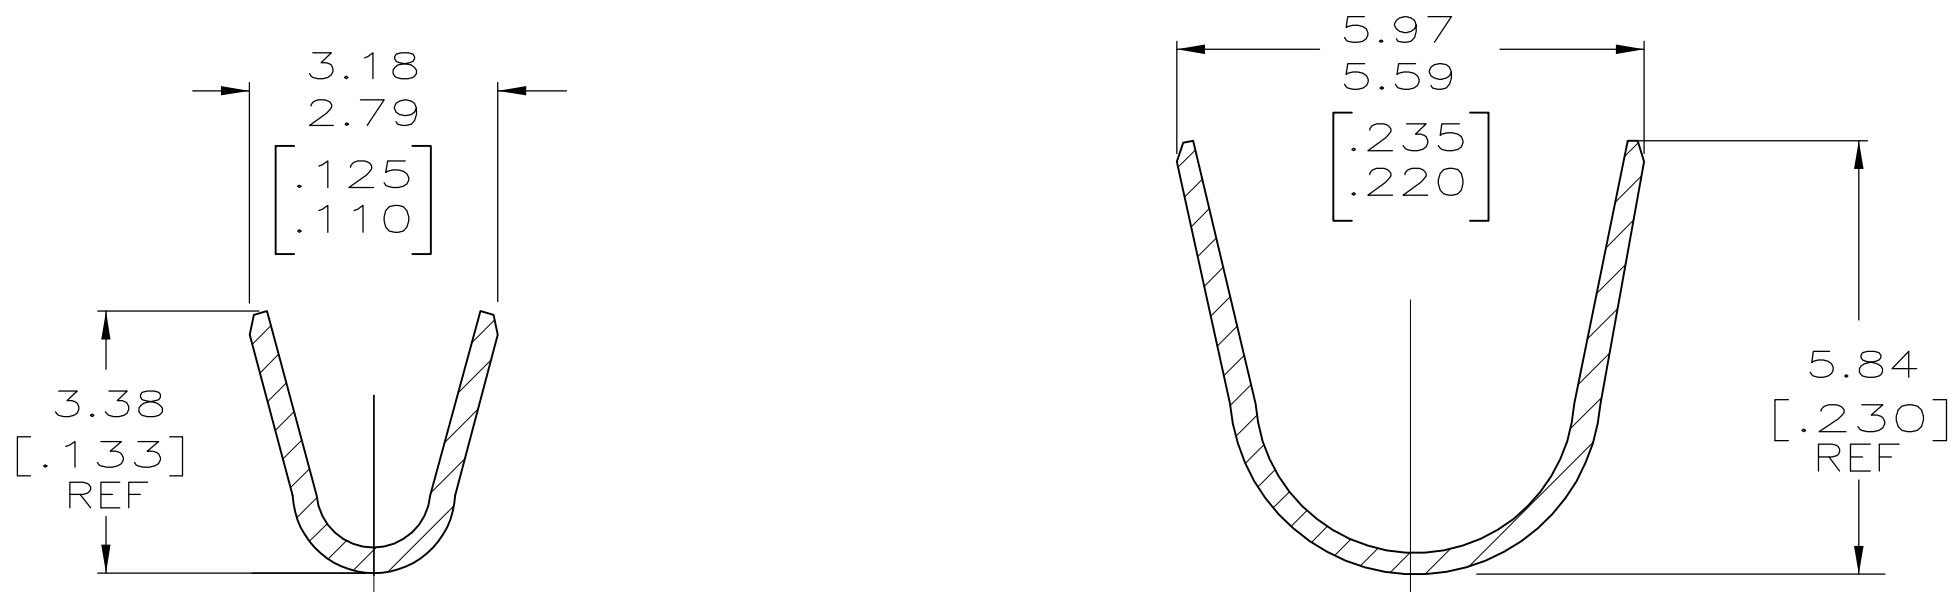

GOLD	2	0.30 [.012] BRASS	350552-7
GOLD	2	0.30 [.012] PH BZ	350552-6
TIN		0.30 [.012] PH BZ	350552-3
GOLD	1	0.30 [.012] BRASS	350552-2
TIN		0.30 [.012] BRASS	350552-1
FINISH	MATERIAL		PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 12NOV2004	 TE Connectivity		
		CHK S. RIDGILL 12NOV2004			
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD S. RIDGILL 12NOV2004	NAME PIN, (LOOSE PIECE), UNIVERSAL MATE-N-LOK™		
	0 PLC ± -	PRODUCT SPEC —			
	1 PLC ± -	APPLICATION SPEC —			
	2 PLC ± 0.13 [.005]	SIZE A2			
MATERIAL —	3 PLC ± -	CAGE CODE 00779			
	4 PLC ± -	DRAWING NO C-350552			
	ANGLES ± 0°30'	RESTRICTED TO —			
FINISH —	WEIGHT —	CUSTOMER DRAWING			
		SCALE 5:1	SHEET 1 OF 1	REV S1	

METRIC