

YXM SERIES


Load Life : 105°C 10000 hours. Miniaturized.

◆FEATURES

- Miniaturized Long Life.
- RoHS compliance.


◆SPECIFICATIONS

| Items | Characteristics | | | | | | | | | | | | | | | | | | |
|--|---|--------------------|------------------------------------|--------------------|--|-----------------|------------------------------------|---------------|-----|---------------|------------------|------|------|------|------|------|------|------|--|
| Category Temperature Range | -25~+105°C | | | | | | | | | | | | | | | | | | |
| Rated Voltage Range | 10~100V.DC | | | | | | | | | | | | | | | | | | |
| Capacitance Tolerance | ±20% (20°C, 120Hz) | | | | | | | | | | | | | | | | | | |
| Leakage Current(MAX) | I=0.01CV or 3 μA whichever is greater. (After 2 minutes) I=Leakage Current(μA) C=Rated Capacitance(μF) V=Rated Voltage(V) | | | | | | | | | | | | | | | | | | |
| (tanδ) Dissipation Factor(MAX) | <table border="1"> <thead> <tr> <th>Rated Voltage (V)</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> <th>(20°C, 120Hz)</th> </tr> </thead> <tbody> <tr> <td>tanδ</td> <td>0.45</td> <td>0.35</td> <td>0.30</td> <td>0.22</td> <td>0.19</td> <td>0.17</td> <td>0.15</td> <td></td> </tr> </tbody> </table> | Rated Voltage (V) | 10 | 16 | 25 | 35 | 50 | 63 | 100 | (20°C, 120Hz) | tanδ | 0.45 | 0.35 | 0.30 | 0.22 | 0.19 | 0.17 | 0.15 | |
| Rated Voltage (V) | 10 | 16 | 25 | 35 | 50 | 63 | 100 | (20°C, 120Hz) | | | | | | | | | | | |
| tanδ | 0.45 | 0.35 | 0.30 | 0.22 | 0.19 | 0.17 | 0.15 | | | | | | | | | | | | |
| Endurance | After applying rated voltage with rated ripple current for 10000 hrs at 105°C, the capacitors shall meet the following requirements. <table border="1"> <tbody> <tr> <td>Capacitance Change</td> <td>Within ± 25% of the initial value.</td> </tr> <tr> <td>Dissipation Factor</td> <td>Not more than 300% of the specified value.</td> </tr> <tr> <td>Leakage Current</td> <td>Not more than the specified value.</td> </tr> </tbody> </table> | Capacitance Change | Within ± 25% of the initial value. | Dissipation Factor | Not more than 300% of the specified value. | Leakage Current | Not more than the specified value. | | | | | | | | | | | | |
| Capacitance Change | Within ± 25% of the initial value. | | | | | | | | | | | | | | | | | | |
| Dissipation Factor | Not more than 300% of the specified value. | | | | | | | | | | | | | | | | | | |
| Leakage Current | Not more than the specified value. | | | | | | | | | | | | | | | | | | |
| Low Temperature Stability Impedance Ratio(MAX) | <table border="1"> <thead> <tr> <th>Rated Voltage (V)</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> <th>(120Hz)</th> </tr> </thead> <tbody> <tr> <td>Z(-25°C)/Z(20°C)</td> <td>8</td> <td>6</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td></td> </tr> </tbody> </table> | Rated Voltage (V) | 10 | 16 | 25 | 35 | 50 | 63 | 100 | (120Hz) | Z(-25°C)/Z(20°C) | 8 | 6 | 4 | 4 | 3 | 3 | 3 | |
| Rated Voltage (V) | 10 | 16 | 25 | 35 | 50 | 63 | 100 | (120Hz) | | | | | | | | | | | |
| Z(-25°C)/Z(20°C) | 8 | 6 | 4 | 4 | 3 | 3 | 3 | | | | | | | | | | | | |

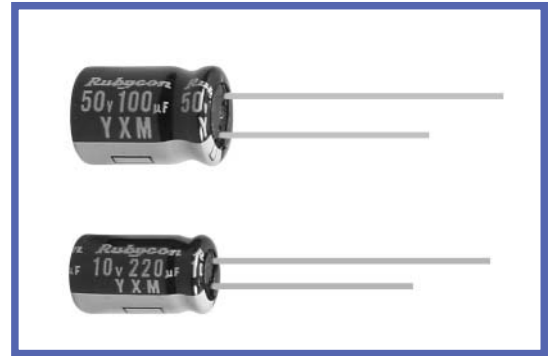

◆DIMENSIONS

(mm)

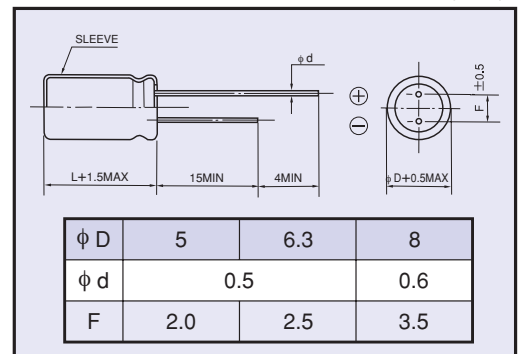

◆MULTIPLIER FOR RIPPLE CURRENT
Frequency coefficient

| Frequency (Hz) | 120 | 1k | 10k | 100k ≤ |
|----------------|------|------|------|--------|
| 0.47~10 μF | 0.42 | 0.60 | 0.80 | 1.00 |
| 22~33 μF | 0.55 | 0.75 | 0.90 | 1.00 |
| 47~330 μF | 0.70 | 0.85 | 0.95 | 1.00 |

◆STANDARD SIZE

Size φ D×L(mm), Ripple Current (mA r.m.s./105°C, 100kHz)

| WV (V.DC) | Cap (μF) | Size | Rated Ripple Current |
|-----------|----------|--------|----------------------|
| 10 (1A) | 100 | 5×11 | 130 |
| | 220 | 6.3×11 | 210 |
| | 330 | 8×11.5 | 330 |
| 16 (1C) | 47 | 5×11 | 130 |
| | 100 | 6.3×11 | 210 |
| | 220 | 8×11.5 | 330 |
| 25 (1E) | 33 | 5×11 | 130 |
| | 47 | 5×11 | 130 |
| | 100 | 6.3×11 | 210 |

| WV (V.DC) | Cap (μF) | Size | Rated Ripple Current |
|-----------|----------|--------|----------------------|
| 35 (1V) | 33 | 5×11 | 130 |
| | 47 | 6.3×11 | 210 |
| | 100 | 8×11.5 | 330 |
| 50 (1H) | 0.47 | 5×11 | 12 |
| | 1 | 5×11 | 25 |
| | 2.2 | 5×11 | 35 |
| | 3.3 | 5×11 | 70 |
| | 4.7 | 5×11 | 80 |
| | 10 | 5×11 | 90 |
| | 22 | 5×11 | 110 |
| | 33 | 6.3×11 | 190 |
| | 47 | 6.3×11 | 190 |
| | 100 | 8×11.5 | 270 |

| WV (V.DC) | Cap (μF) | Size | Rated Ripple Current |
|-----------|----------|--------|----------------------|
| 63 (1J) | 10 | 5×11 | 80 |
| | 22 | 6.3×11 | 170 |
| | 33 | 6.3×11 | 170 |
| | 47 | 8×11.5 | 240 |
| | 0.47 | 5×11 | 20 |
| 100 (2A) | 1 | 5×11 | 40 |
| | 2.2 | 5×11 | 50 |
| | 3.3 | 5×11 | 60 |
| | 4.7 | 5×11 | 70 |
| | 10 | 6.3×11 | 150 |
| | 22 | 8×11.5 | 230 |

◆PART NUMBER

 YXM D×L
 Rated Voltage Series Rated Capacitance Capacitance Tolerance Option Lead Forming Case Size