


JIS C 2805

■R形

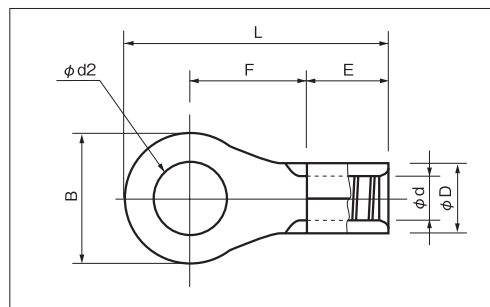

品番	各 部 の 寸 法 mm							電線抱合範囲			適 用 工 具		包装個数		
	φd2	B	L	F	E	φD	φd	単線mm	撚線mm ²	AWG	手 動 工 具				
											本 体	ヘッド			
R 3.5-4S ※	4.3	7.0	17.5	8.0	6.0	5.1	3.0	1.82 ∫ 2.4	2.63 ∫ 4.6	12	NH 1 NH 9		1,000 (100×10)		
R 3.5-4 ○		8.0	18.0												
R 3.5-5N ※ ○	5.3	9.6	20.0	9.2											
R 3.5-5S ○		12.0	21.4	9.4											
R 3.5-5L ○	6.4	9.6	20.0	9.2											
R 3.5-6 ○		12.0	21.4	9.4											
R 3.5-6L ○	8.4	13.5	25.5	12.75										NA 10 NA 3	N10 03 N3 7
R 3.5-8 ○															
R 5.5-3M ○	3.2	6.5	16.95	7.2	6.5	5.6	3.4	1.82 ∫ 2.89	2.63 ∫ 6.64	12-10	NH 1 NH 9		1,000 (100×10)		
R 5.5-3N ○		7.0	17.2												
R 5.5-3S ○	3.7	9.0	18.2												
R 5.5-3.5N ○		7.0	17.2												
R 5.5-3.5S ○	5.3	9.0	18.2	8.25											
R 5.5-3.5 ○		9.5	19.5	8.25											
R 5.5-4N ○	4.3	7.0	17.2	7.2											
R 5.5-4S ○		9.0	18.2												
R 5.5-4 ●	5.3	9.5	19.5	8.25											
R 5.5-5N ○		8.0	17.7	7.2											
R 5.5-5S ○	6.4	9.0	18.2												
R 5.5-5 ●		9.5	19.5	8.25											
R 5.5-6S ※	8.4	9.0	23.0	12.0											
R 5.5-6 ●		12.0		10.5											
R 5.5-8 ●	10.5	15.0	28.0	14.0											
R 5.5-10 ●	13.0	19.2	32.5	16.4											
R 5.5-12 ○	15.0														
R 5.5-14 ○															
R 8-4S ○	4.3	8.0	21.5	9.1	8.4	7.1	4.5	2.89 ∫ 3.65	6.64 ∫ 10.52	8	NH 1 NH 9 NOP 60 NOM 60		1,000 (100×10)		
R 8-4 ○		12.0	23.5	9.1											
R 8-5N ※	5.3	9.0	22.0	9.1											
R 8-5S ○		10.0	22.5	9.1											
R 8-5 ●	6.4	12.0	23.5												
R 8-6S ○		10.0	22.5												
R 8-6 ●	12.0	23.5													
R 8-8 ●	8.4	15.0	29.5	13.6											
R 8-10 ●	10.5														
R 8-12 ○	13.0	20.0	33.5	15.1											
R 8-14 ○	15.0	22.0	37.0	17.6											

※定格電流、引張り強さ等、他の端子と一部仕様が異なります。

注1) ● : JIS規格品. UL・CSA登録品 ○ : UL・CSA登録品

2) [UL・CSA登録品] [電線被覆ムキ寸法] についてはP12をご覧ください。