


ENGLISH

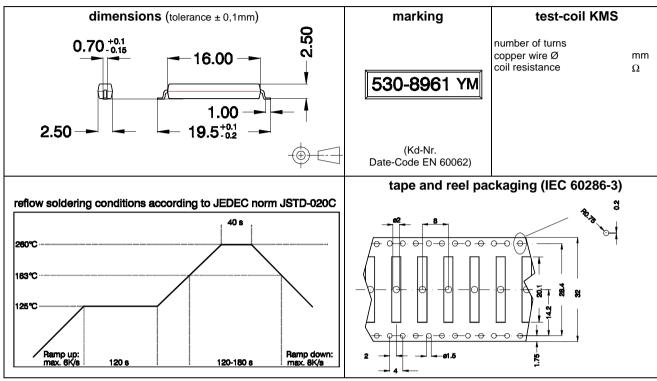

contact data (Form A/Dry)	condition	Min.	Тур.	Max.	Unit
pull-in energization contact modified	measuring ramp 10 mA/s	1,25		2,04	mT
contact material		Ruthenium			
rated power	each combination of the switching voltage and current must not exceed the given rated power			10	W
switching voltage				180	VDC
switching current				0,5	Α
carry current				1,0	Α
static contact resistance	measured with mit 1,4 x AT _{pull-in}			150	mΩ
insulation resistance	RH Ω 45%	10 ¹⁰			Ω
breakdown voltage		210			VDC
resonant frequency			6700		Hz
operate time incl. bounce	measured with 1,4 x AT _{pull-in}		0,5		ms
release time			0,1		ms
capacitance	without test coil			0,3	pF
shock	½ sine wave, duration 11ms			150	g
vibration	10 – 2000Hz			10	g
operating temperature		-40		130	°C
storing temperature		-50		130	°C
general data					
soldering temperature	4 sec. at			360	°C
cleaning		fully sealed			
material of case		mineral-filled epoxy			
reel dimensions					
outer diameter			330		mm
outer width			38		mm
shaft diameter			12		mm