


Datasheet

LC Adaptors

RS Stock number [536-7623](#)

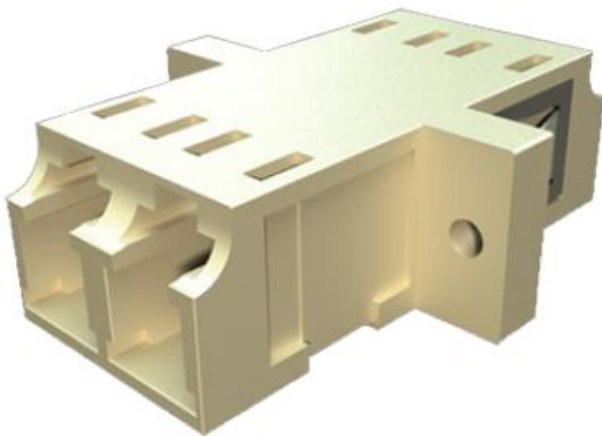

Description:

Our range of LC adaptors have high precision alignment sleeves for improved reliability and better reconnectability. The LC adaptors come with ceramic sleeves for both singlemode and multimode. The housing is available in different colours with options for flange or flangeless body and metal or inbuilt clips.

Specifications:

	Ceramic	Conformance
Insertion Loss (typ)	0.1dB	IEC 61300-3-4
Mating Durability	500	IEC 61300-2-2
Receptacle Retention Force	1N-2.5N	IEC 61754-20
Operating temperature	-25 to +70, 12 cycles	IEC 61300-2-22



Features:

- Complies with IEC 61754-20
- High precision alignment sleeve
- Low insertion loss and high reconnectability
- REACH SvHC compliant
- Materials compliant to RoHS2
- Available in simplex, duplex and quad adaptors

Applications:

- Data processing networks
- Premises distribution
- Telecommunications networks
- CATV, LAN, MAN, WAN application
- Cable television
- Fibre-To-The-Home