


NO	DESCRIPTION	DATE
⚠	ADD MIS PART NO.	04.01.04'
⚠	ADD DESCRIPTION ADD 6.2±0.38 33.32±0.13 → 33.33±0.25 24.66±0.13 → 24.67±0.25 ø3.05 → ø3.05±0.25 7.9 → 7.9±0.25 12.55 REF. → 12.55±0.38 2.77 → 2.77±0.38 27.51 REF. → 27.5±0.38 1 → 0.76±0.25 10.72 REF. → 10.72±0.38 11 REF. → 10.85±0.38 3.3 REF. → 2.4±0.5 2.84 → 2.84±0.38 TIN → GOLD MIS PART NO. → P/N	10.02.07'
⚠	CORRECT DIMENSION LINE POSITION	12.02.11'
⚠	GOLD	05.16.13

CONTACT TYPE
COLOR OF INSULATION
PLATING OF CONTACT
SOLDER TERMINATIONS
WORKING VOLTAGE
CONTACT RESISTANCE
MATING CYCLES

MACHINED CONTACT
BLACK PBT GLASSFIBRE REINFORCED
⚠ GOLD
⚠ GOLD
500V AC AT SEA LEVEL
10m OHM MAX.
150 TIMES

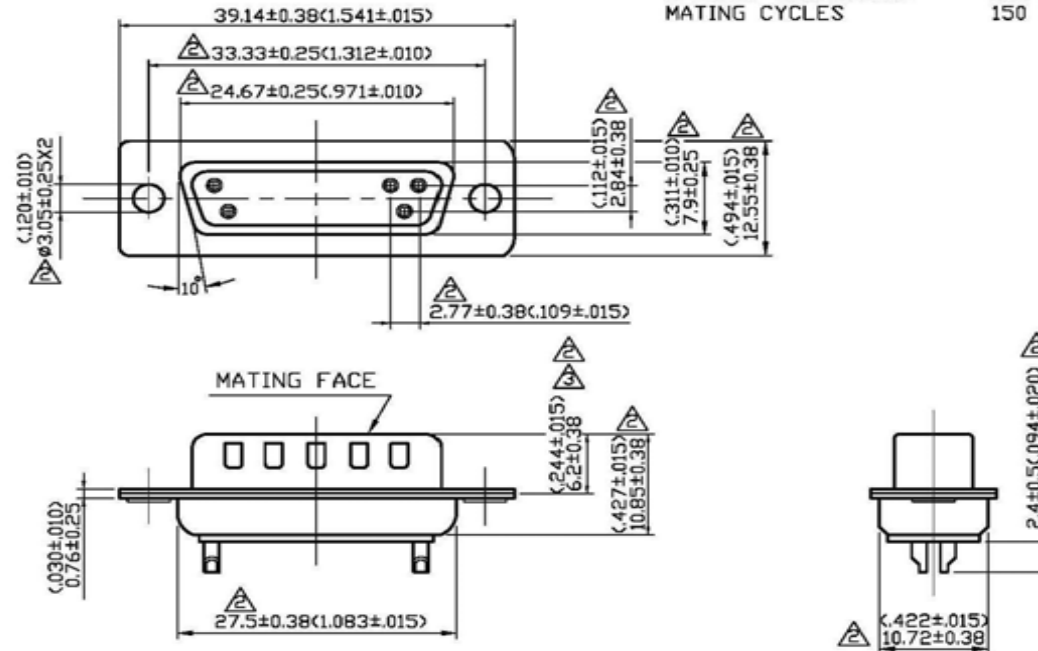

⚠ ⚠ P/N: 544-3799

APPROVED

by

DATE:



DESCRIPTION		D-SUB WITH 15-PIN FEMALE CONNECTOR BY MACHINING	
製圖	DRAWN Yoko	TOLERANCE .X ±0.2	品名 □50-0015S-M
檢圖	CHECK Ivan	.XX ±0.1	TITLE ROHS COMPLIANT
認定	APPROVAL Angela	.XXX ±0.05	單位 mm(in)
		ANGLE ±5°	DWG. NO. 55-0049
		比例 2:1	DATE 02.23.95
			版次 A-4