

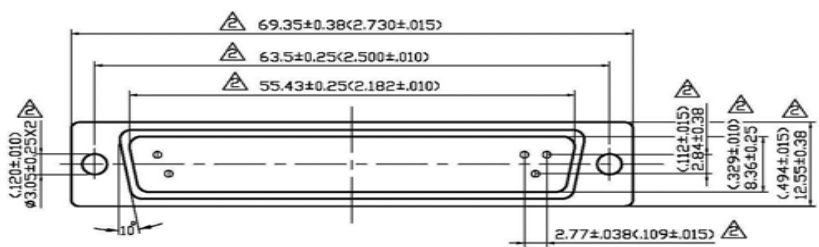


NO	DESCRIPTION	DATE
△	ADD MIS PART NO.	04.01.04
	ADD DESCRIPTION	
	69.32±0.38 → 69.35±0.38	
	63.5±0.13 → 63.5±0.25	
	55.42±0.13 → 55.43±0.25	
	φ3.05 → φ3.05±0.25	
	9.36 → 9.36±0.25	
△	12.55 REF. → 12.55±0.38	03.14.08
	2.77 → 2.77±0.38	
	57.71 REF. → 57.7±0.38	
	1 → 1±0.25	
	(5.84) → 5.83±0.38	
	10.72 REF. → 10.72±0.38	
	11 REF. → 10.82±0.38	
	3.3 REF. → 2.7±0.5	
	2.84 → 2.84±0.38	
	TIN → GOLD	
	MIS PART NO. → P/N	
△	GOLD	05.16.13



CONTACT TYPE
COLOR OF INSULATION
MACHINED CONTACT
BLACK PBT
GLASSFIBRE REINFORCED
GOLD
500V AC AT SEA LEVEL
10m OHM MAX.
150 TIMES
DIMPLED

PLATING OF CONTACT
SOLDER TERMINATIONS
WORKING VOLTAGE
CONTACT RESISTANCE
MATING CYCLES
PLUG

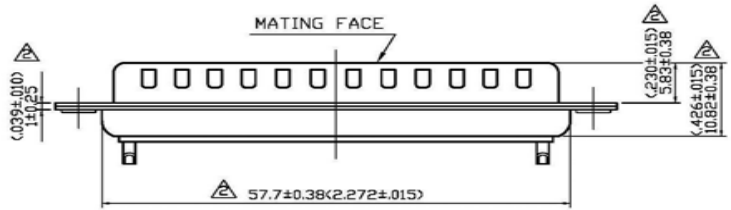

△△ P/N: 544-3856

APPROVED by _____ DATE: _____



DESCRIPTION D-SUB WITH 37-PIN MALE CONNECTOR BY MACHINING									
製圖	DRAWN	TOLERANCE	品名	050-0037P-M		日期	DATE	版次	REV.
檢圖	CHECK	X ±0.2	TITLE	\RDHS COMPLIANT		02.23.95			A-3
檢圖	Ivan	.XX ±0.1	單位	mm(in)		DWG.NO. 55-0055			
認定	APPROVAL	.XXX ±0.05	比例	SCALE					
	Angela	ANGLE ±5°	比例	2:1					