


NO	DESCRIPTION	DATE
△	ADD VSWR	02.18.12'
△	DEL. PROOF VOLTAGE WORKING VOLTAGE → VOLTAGE RATING	04.18.13'
△	MODIFICATION PARTS ① ②	06.25.14'

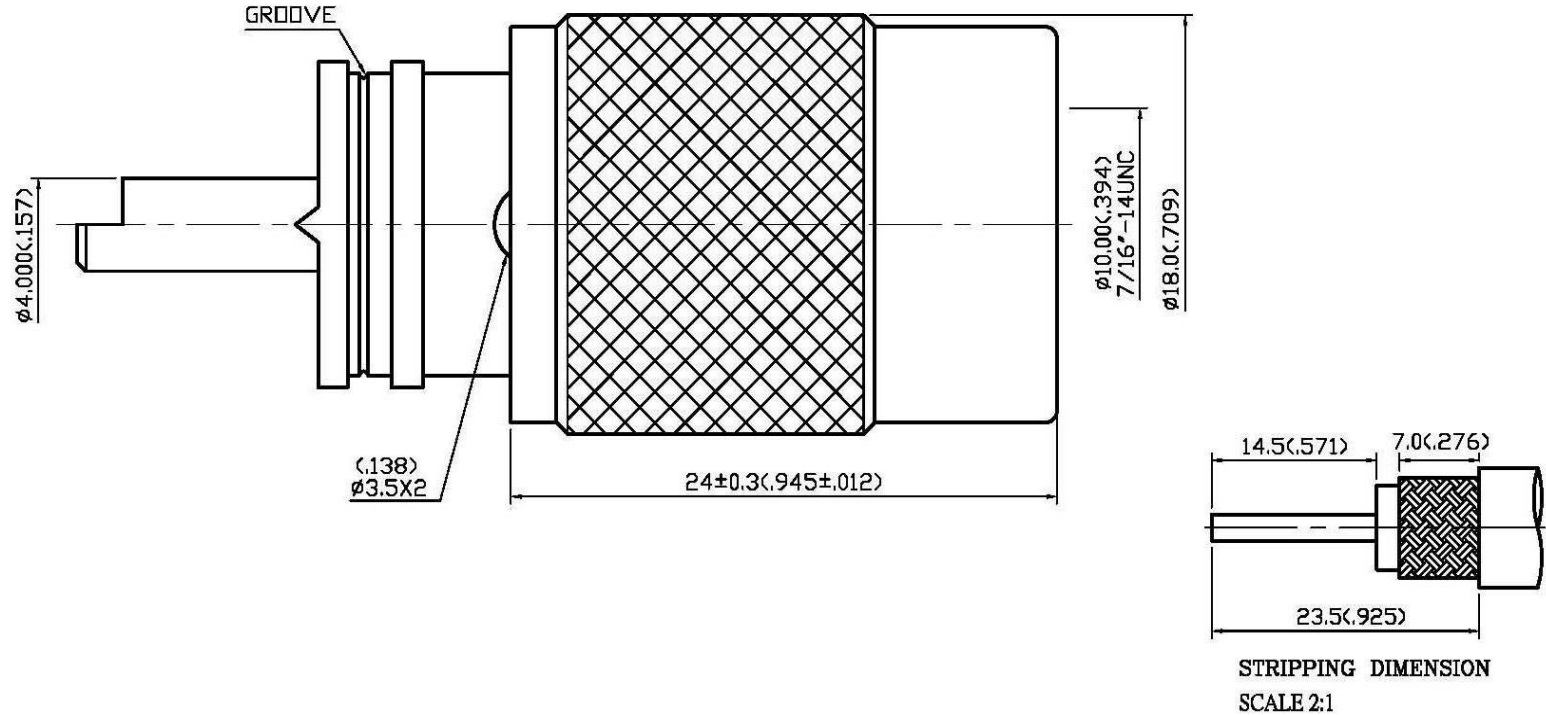

1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-300 MHz
 1.2 NOMINAL IMPEDANCE: 50 OHMS
 1.3 VOLTAGE RATING: 500 VOLTS MAX. △
 1.4 VSWR: 1.3 MAX. △

2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604
 2.2 CENTER CONTACT: BRASS PER JIS-C3604
 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

3.0 FINISHES AND OTHERS

- 3.1 SEE BELOW TABLE FOR DETAILS.

4.0 MECHANICAL

- 4.1 FOR USE WITH RG213 OR SIMILAR STYLE CABLE
 4.2 CABLE ATTACHMENT: OUTER: TWIST ON AND SOLDER, INNER: SOLDER

5.0 ENVIRONMENTAL

- 5.1 OPERATING TEMPERATURE RANGE: -55° C TO +85° C

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
5	SHELL	BRASS	1	SILVER 70 μ" MIN.
4	BODY	BRASS	1	SILVER 70 μ" MIN.
3	INSULATION	TEFLON	1	NONE
2	INSULATION	TEFLON	1	NONE
1	CENTER CONTACT	BRASS	1	SILVER 70 μ" MIN.



APPROVED

by _____ DATE: _____

DESCRIPTION		UHF STRAIGHT PLUG TWIST-ON									
製圖	DRAWN	TOLERANCE		品名	17-06	T.S.S	213U	日期	DATE	版次	REV.
	Yoko	.X	±0.2	TITLE	\ROHS COMPLIANT		(50Ω)	01.28.93'		B-3	
檢圖	CHECK	.XX	±0.1	單位	UNIT		DWG.NO. 17-0045				
	Arc	.XXX	±0.05	比例	SCALE						
認定	APPROVAL	ANGLE	±5°	比例	SCALE						
	Angela			4:1							