
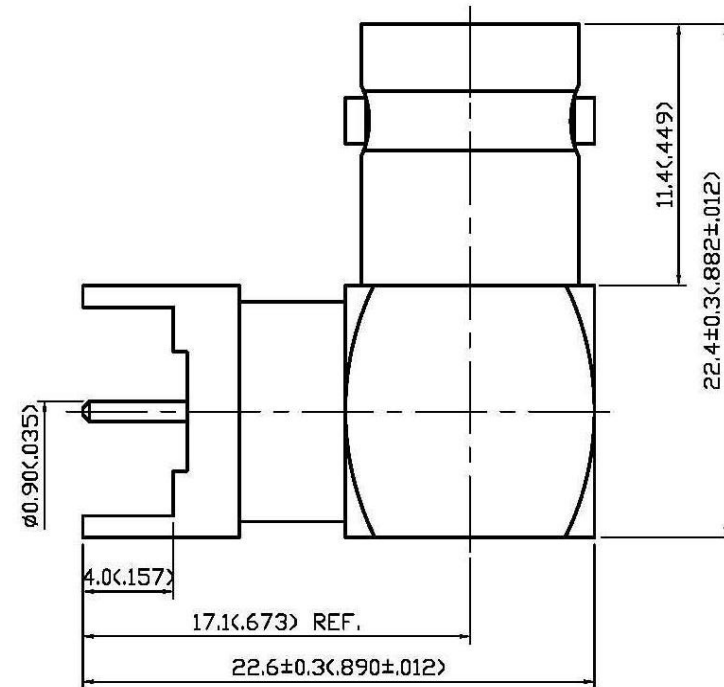


NO	DESCRIPTION	DATE
①	BACKGROUND FORMAT UPDATED	03.22.04'
②	BACKGROUND FORMAT UPDATED Ø1.5<.059> MIN. → Ø1.7<.067> MIN.	11.05.08'
③	ADD VSWR	09.10.12'
④	DEL PROOF VOLTAGE WORKING VOLTAGE → VOLTAGE RATING	04.29.13'

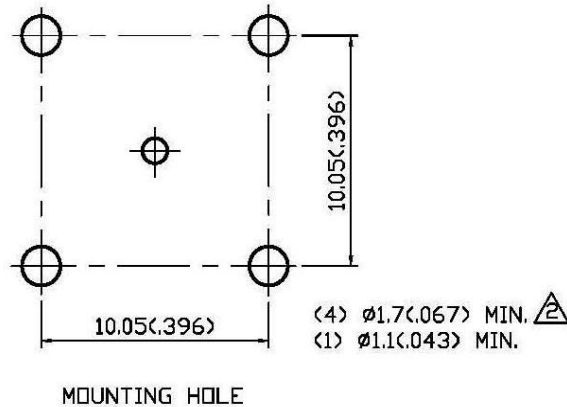

### 1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-4 GHz
- 1.2 NOMINAL IMPEDANCE: 50 OHMS
- 1.3 VOLTAGE RATING: 500 VOLTS MAX. ④
- 1.4 VSWR: 1.5 MAX. ③

### 2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BRASS PER JIS-C3604
- 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

### 3.0 FINISHES AND OTHERS

- 3.1 SEE BELOW TABLE FOR DETAILS.

### 4.0 MECHANICAL

- 4.1 INTERFACE IN ACCORDANCE WITH: MIL-STD-348A

### 5.0 ENVIRONMENTAL

- 5.1 OPERATING TEMPERATURE RANGE: -65° C TO +165° C

7	CAP	BRASS	1	NICKEL
8	BODY II	BRASS	1	NICKEL 100μ" MIN.
5	INSULATION	TEFLON	1	NONE
4	CENTER CONTACT II	BRASS	1	GOLD
3	BODY I	BRASS	1	NICKEL 100μ" MIN.
2	CENTER CONTACT I	BRASS	1	GOLD
1	INSULATION	TEFLON	1	NONE
NO	DESCRIPTION	MATERIAL	Q' TY	FINISH



APPROVED

by \_\_\_\_\_ DATE: \_\_\_\_\_

DESCRIPTION		BNC RIGHT ANGLE PCB MOUNT JACK RECEPTACLE							
製圖	DRAWN	TOLERANCE	品名	13-53 T.G.N	日期	DATE	版次	REV.	
	<i>Kristina</i>								
檢圖	CHECK	UNIT	單位	DWG.NO.	13-0256				
	<i>Iavn</i>					.XX ±0.1	mm(in)		
認定	APPROVAL	SCALE	比例						
	<i>Angela</i>			.XXX ±0.05	4:1	ANGLE ±5°			