



NO	DESCRIPTION	DATE
1	BACKGROUND FORMAT UPDATED	03.22.04'
2	BACKGROUND FORMAT UPDATED Ø1.5<.059> MIN. → Ø1.7<.067> MIN.	11.05.08'
3	ADD VSWR	09.10.12'
4	DEL. PROOF VOLTAGE WORKING VOLTAGE → VOLTAGE RATING	04.29.13'

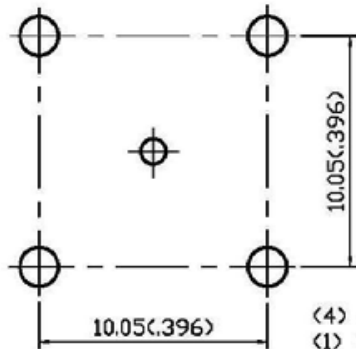

MOUNTING HOLE

(4) Ø1.7<.067> MIN. \triangle /15/201
(1) Ø1.1<.043> MIN.

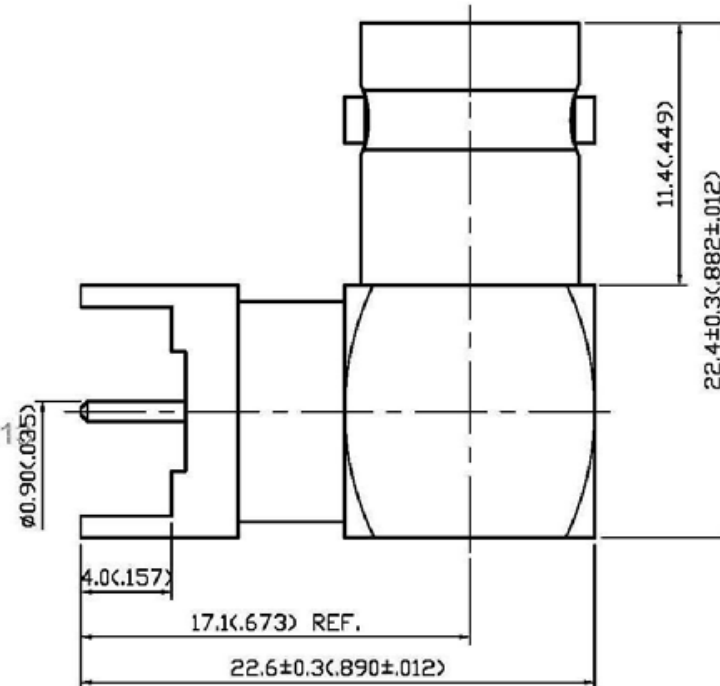

1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-4 GHz
- 1.2 NOMINAL IMPEDANCE: 50 OHMS
- 1.3 VOLTAGE RATING: 500 VOLTS MAX. \triangle 4
- 1.4 VSWR: 1.5 MAX. \triangle 3

2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BRASS PER JIS-C3604
- 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

3.0 FINISHES AND OTHERS

- 3.1 SEE BELOW TABLE FOR DETAILS.

4.0 MECHANICAL

- 4.1 INTERFACE IN ACCORDANCE WITH: MIL-STD-348A

5.0 ENVIRONMENTAL

- 5.1 OPERATING TEMPERATURE RANGE: -65° C TO +165° C

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
7	CAP	BRASS	1	SILVER 70 μ" MIN.
6	BODY II	BRASS	1	SILVER 70 μ" MIN.
5	INSULATION	TEFLON	1	NONE
4	CENTER CONTACT II	BRASS	1	SILVER 70 μ" MIN.
3	BODY I	BRASS	1	SILVER 70 μ" MIN.
2	CENTER CONTACT I	BRASS	1	SILVER 70 μ" MIN.
1	INSULATION	TEFLON	1	NONE



APPROVED by _____ DATE: _____

(P/N:5464516)

DESCRIPTION		BNC RIGHT ANGLE PCB MOUNT JACK RECEPTACLE								
製圖	DRAWN	TOLERANCE		品名	13-53	T.S.S	日期	DATE	版次	REV.
	Yoko	.X	±0.2	TITLE	\ROHS COMPLIANT (50Ω)		11.27.92'		A-4	
檢圖	CHECK	.XX	±0.1	單位	mm(in)	DWG.NO.	13-0256			
	Ivan	.XXX	±0.05	比例	SCALE					
認定	APPROVAL	ANGLE	±5°							
	Angela									