


NO	DESCRIPTION	DATE
△	REDUCE SPRING WASHER FROM 2 PCS TO 1 PC	06.06.97
△	BACKGROUND FORMAT UPDATED	11.20.03'
△	BACKGROUND FORMAT UPDATED	10.15.09'
△	ADD VSWR	02.29.12'
△	DEL PROOF VOLTAGE WORKING VOLTAGE VOLTAGE RATING 1 GHz → 2 GHz	11.28.14'

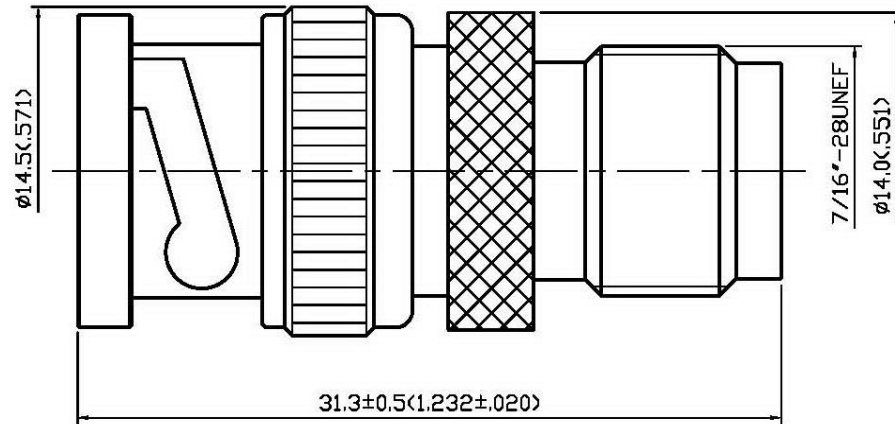

1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-4 GHz
- 1.2 NOMINAL IMPEDANCE: 50 OHMS
- 1.3 VOLTAGE RATING: 500 VOLTS MAX. △
- 1.4 VSWR: 1.3 MAX. @2 GHz △ △

2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BRASS PER JIS-C3604

3.0 FINISHES AND OTHERS

- 3.1 SEE BELOW TABLE FOR DETAILS.

4.0 ENVIRONMENTAL

- 4.1 OPERATING TEMPERATURE RANGE: -20° C TO +80° C

9	INSULATION	POM	1	NONE
8	BODY	BRASS	1	NICKEL 100μ" MIN.
7	CENTER CONTACT	BRASS	1	GOLD
6	WASHER	BRASS	1	NICKEL
5	SPRING WASHER	SK-5	1	NICKEL
4	WASHER	BRASS	1	NICKEL
3	GASKET	RUBBER	1	RED
2	INSULATION	POM	1	NONE
1	SHELL	ZINC	1	NICKEL
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH

△



APPROVED by _____ DATE: _____

DESCRIPTION		STRAIGHT BNC PLUG - TNC JACK ADAPTER							
製圖	DRAWN	TOLERANCE	品名	13-45	D.G.Z	日期	DATE	版次	REV.
	Kristina	X ±0.2	TITLE	\ROHS COMPLIANT (50Ω)		11.20.92'		A-5	
檢圖	CHECK	XX ±0.1	單位	DWG.NO. 13-0236					
	Arc	XXX ±0.05	mm(in)						
認定	APPROVAL	ANGLE ±5°	比例	SCALE 4:1					
	Angela								