

Specification for Approval

Customer : **Linkman Co.,Ltd.**

Part Name : **AC ADAPTER**

Description : **9Volts / 2.5Amps**

Model No. : **STD-09025U (USA / Level V)**

Customer P / N :

Product P / N : **RXTD09025U415204**

Issued Date : **27 - Jan. - 2015**

Version : **A1**

Issued Stamp :

Customer's Approval Signature

ADAPTER TECHNOLOGY CO.,LTD.

Office (Taiwan) : 6F-9,No.258, Liancheng Rd.,Zhonghe District,New Taipei City 235,Taiwan (R.O.C.)

TEL : +886-2-8226-2279

FAX : +886-2-8226-2238

E-mail : service_tw@ adaptertech.com.tw ; service@ adaptertech.com.tw

Factory (China) : BOAYANG ELECTRONICS CO., LTD.

**Di Feng Gong Ye Qu 2 Hao,Xiasha Liuwu Village, Shipai Town, Dong Guan City,
Guang Dong Province,China**

TEL : 86-0769-8136-9899 ; 86-0769-8136-0909 ; 86-0769-8136-9008

86-0769-8186-8338 ; 86-0769-8186-8900

FAX : 86-0769-8136-9009

22.5W

AC Adapter

SPECIFICATION

Model No. : STD-09025U (USA / Level V)

Description : 9Volts / 2.5Amps

Part No. : RXTD09025U415204

Version : A1

Date : 27 - Jan. - 2015

Approved	Reviewed	Checked	Prepared	Sales
				

1. Feature :

- ◆ **Input** : **Universal 100 ~ 240 Vac / 47 ~ 63 Hz Input, without any slide switch.**
- ◆ **Output** : **+9V / 0~2.5 A**
- ◆ **Case Dimension** : **72mm(L)*34mm(W)*69mm(H) (±0.5mm)**
- ◆ **Efficiency** : **Eff (av) ≥ 81.81 % Min.**
- ◆ **Safety** : **PSE**
- ◆ **EMI** : **Class B ; Conduction & Radiation Met.**
- ◆ **Protection** : **OVP (Over Voltage Protection) 、 SCP (Short Circuit Protection) 、 OCP (Over Current Protection)**
- ◆ **High frequency design , less power consumption.**
- ◆ **Suitable for usage at Telecommunication, Computer, Industrial Controller, & OA System.**
- ◆ **Meet Energy Star V / Erp (Stage 2) / MEPS V .**

2. Input :

2.1 Voltage	Universal 100~240Vac, single phase
2.2 Frequency	47 ~ 63 Hz
2.3 Current	0.58A Max.
2.4 Inrush Current	30A Max. / 100Vac ; 60A Max. / 230Vac (Cold Start At 25 °C , Full Load)
2.5 Efficiency	Eff (av) ≥ 81.81% Min. (At 115 Vac & 230 Vac)
2.6 Power Consumption	Pi ≤ 0.3 W (At 230Vac & No Load)

$$\text{※Eff (av)} = \frac{E_1 + E_2 + E_3 + E_4}{4}$$

E1=efficiency with 25% rated load ; E2= efficiency with 50% rated load
E3=efficiency with 75% rated load ; E4= efficiency with 100% rated load

3. Output :

3.1 DC Output	Voltage	+9V ± 5%
	Current	2.5A Max.
	Regulation	8.55Vmin. ~ 9.0Vtyp. ~ 9.45Vmax.
	Ripple & Noise	100 mV Max.
	Total Power	22.5W Max.

Remark : For ripple & noise measurement, use a 20MHz bandwidth frequency oscilloscope, and add a 0.1μF multilayer Cap. and a Low ESR Electrolytic Cap. (10 μF) at output connector terminals. (At nominal line voltage, Full Load)

4. Protection :

4.1 Over Voltage Protection (OVP)	11V (Max.)
4.2 Short Circuit Protection (SCP)	Automatic recovery after short-circuit fault being removed
4.3 Over Current Protection(OCP)	5A (MAX)

Remark : When Short Circuit Protection is activated,the power supply will shutdown automatically.

Once the abnormal condition resulting in the failure being removed, the power supply will restart accordingly. When

Over Voltage Protection is activated, the power supply will shutdown.

5. Safety 、 EMI and EMC Requirement :

5.1 Safety Requirement

a. Safety : PSE

b. Dielectric Strength : 10mA Max. Cut off current

(1)	Primary to Secondary	3000Vac for 1 Minute
-----	----------------------	----------------------

c. Insulation Resistance :

(1)	Primary to Secondary	10 M Ohm for 500Vdc
-----	----------------------	---------------------

5.2 EMI Requirement : Class B ; Conduction & Radiation Met.

5.3 Leakage Current : Less than 0.25mA

6. Operation and Environment Performance :

6.1 Temperature Range

Operating	+ 0°C ~ + 40°C
Storage	- 20 °C ~ + 80 °C

6.2 Humidity Range(Non-condensing)

Operating	20% ~ 80% RH
Storage	10% ~ 90% RH

6.3 Cooling : By natural air

7. M.T.B.F. : 300,000Hrs.(Calculated Hours at 25°C,By Telcordia SR-332)

8.Mechanical :

8.1 Weight : 165 g Typical

8.2 Cable Type : Black UL2468 AWG18
(Wire + Plug)

Plug : $\phi 5.5 * \phi 2.1 * 9.5 \text{mm}$ (Tuning Fork & Cannelure)

8.3 Cable Length : 1500mm




8.4 Case Dimension : 88mm(L)*50mm(W)*34mm(H) ($\pm 0.5 \text{mm}$)

8.5 Material Flammability : UL 94V-0

8.6 External Apperance : As drawing below (Scale - mm)




Output Cable Plug Pin Assignment

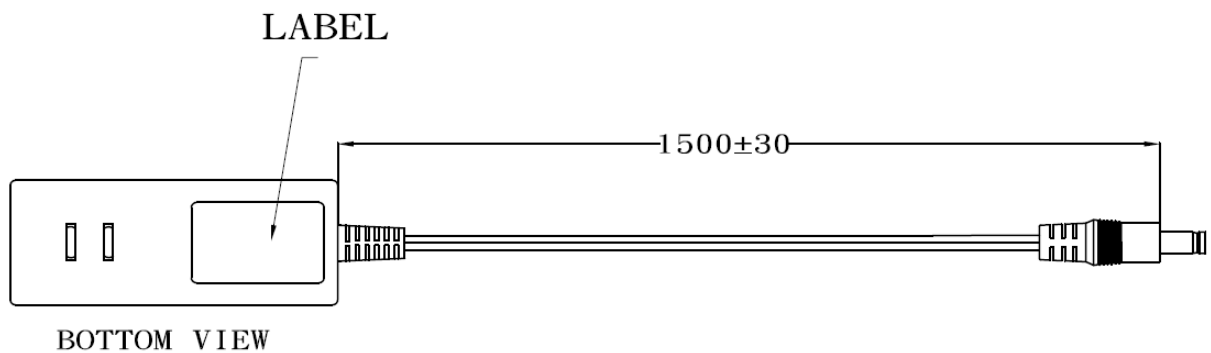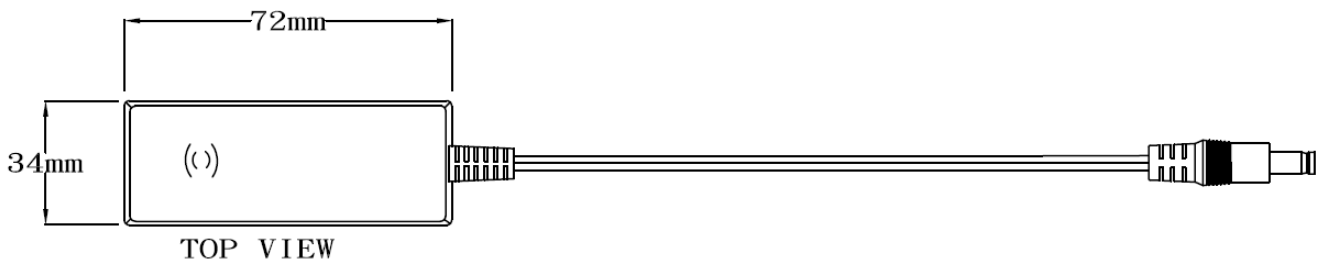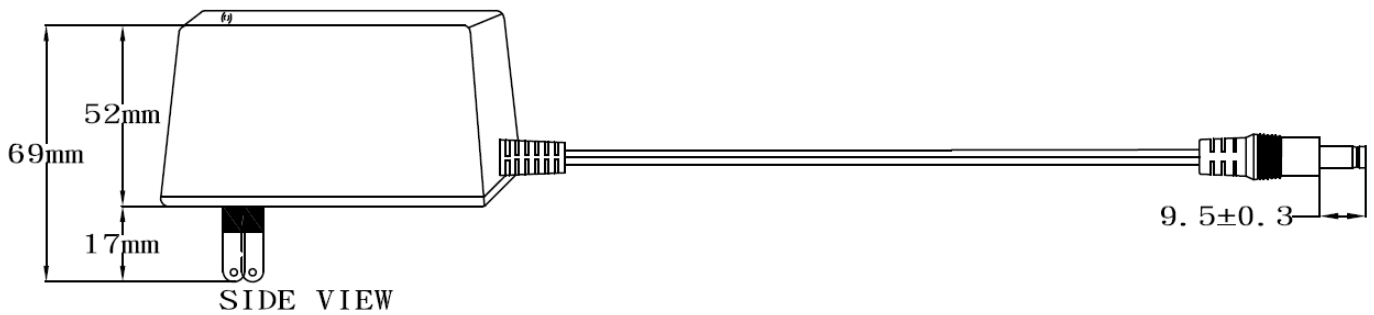

8.7 Spec. Label Materials : Metalized Polyester Label (Silver Gloss)
 Color : Black Background with Silver Printing
 Label Dimension : 34.5mm(L)*24.5mm(W)+/-0.1mm
 Label Thickness : #75

100%



"XXX"


Label supplier's code.
 It is accurate that the number
 of words depends on the real
 finished product.

ID NO. "X"

Manufacturer's code.
 It is accurate that the number
 of words depends on the real
 finished product.

Label Part No. : 9443052520

300%

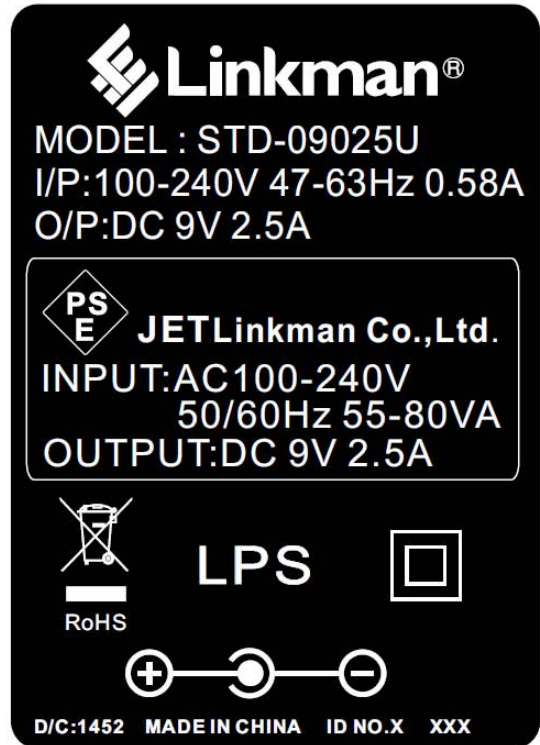

A. Line Regulation Test

Test Result :

Test condition	Spec.	Reading 1	Reading 2	Reading 3
90Vac / 50 % Load	8.55~9.45 V	9.098 V	9.056 V	9.014 V
115Vac / 50 % Load	8.55~9.45 V	9.098 V	9.055 V	9.014 V
132Vac / 50 % Load	8.55~9.45 V	9.098 V	9.055 V	9.015 V
180Vac / 50 % Load	8.55~9.45 V	9.097 V	9.056 V	9.014 V
230Vac / 50 % Load	8.55~9.45 V	9.098 V	9.055 V	9.014 V
264Vac / 50 % Load	8.55~9.45 V	9.097 V	9.055 V	9.015 V

B. Efficiency Test

Test Result :

Test condition	Spec.	Reading 1	Reading 2	Reading 3
115Vac	81.81 % Min.	82.70 %	82.11 %	82.98 %
230Vac	81.81 % Min.	81.92 %	81.93 %	81.98 %

$$\text{Eff (av)} = \frac{E_1 + E_2 + E_3 + E_4}{4}$$

E1=efficiency with 25% rated load ; E2= efficiency with 50% rated load
E3=efficiency with 75% rated load ; E4= efficiency with 100% rated load

C. Load Regulation Test

Test Result :

Test condition	Spec.	Reading 1	Reading 2	Reading 3
115Vac / 0 % Load	8.55~9.45 V	9.251 V	9.245 V	9.233 V
115Vac / 50 % Load	8.55~9.45 V	9.098 V	9.055 V	9.014 V
115Vac / 100 % Load	8.55~9.45 V	8.946 V	8.911 V	8.923 V
230Vac / 0 % Load	8.55~9.45 V	9.250 V	9.245 V	9.233 V
230Vac / 50 % Load	8.55~9.45 V	9.098 V	9.055 V	9.014 V
230Vac / 100 % Load	8.55~9.45 V	8.946 V	8.911 V	8.923 V

D. Ripple & Noise Test

Test Result :

Test condition	Spec.	Reading 1	Reading 2	Reading 3
115Vac / 100 % Load	100mVpp Max	56.7mVpp	60.4mVpp	57.1mVpp
230Vac / 100 % Load	100mVpp Max	57.5mVpp	58.8mVpp	56.7mVpp

E. Inrush Current

Test Result :

Test condition	Spec.	Reading 1	Reading 2	Reading 3
100Vac / 100 % Load	30A Max.	27.8 A	27.9A	27.5A
230Vac / 100 % Load	60A Max	42.6 A	43.2A	43.3A

F. Over Current Protection

Test Result :

Test condition	Spec.	Reading 1	Reading 2	Reading 3
115Vac / 100 % Load	5 A Max.	3.145 A	3.158 A	3.101A
230Vac / 100 % Load	5 A Max.	3.711 A	3.812 A	3.701A

G. Short Circuit Protection

Test Result :

Test condition	Spec.	Reading 1	Reading 2	Reading 3
115Vac / 100 % Load	Auto Recovery	OK	OK	OK
230Vac / 100 % Load	Auto Recovery	OK	OK	OK

H. Input Power Consumption(No Load)

Test Result :

Test condition	Spec.	Reading 1	Reading 2	Reading 3
230Vac / 0 % Load	≤ 0.3 W	0.20W	0.22W	0.21W

Efficiency Test Report





- A. **Model Number** : STD-09025Z (Z=A,B,C,E,K,T,U,V) (9.0V / 2.5A / 22.5W)
- B. **DC Power Cord** : UL2468 , 18AWG , 1.5M
- C. **Average Efficiency** :
- Energy Star V** (0.0626*Ln(Nameplate Output)+0.622) = 81.69 % Min.
- Erp (Stage 2)** (0.063*Ln(Nameplate Output)+0.622) = 81.81 % Min.
- MEPS V** (0.0626*Ln(Nameplate Output)+0.622) = 81.69 % Min.
- D. **NO Load Power Consumption** :
- Energy Star V** 0.3W Max.
- Erp (Stage 2)** 0.3W Max.
- MEPS V** 0.3W Max.
- E. **Testing Dequpment** :
- a. **AC Power Source** : " Zentech " 2700M-10
- b. **Electronic Load** : " PRODIGIT " 3311C
- c. **Power Meter** : " Zentech " 2100
- d. **Digital Meter** : " FLUKE " 45
- F. **AC Input Voltage** : 115Vac/60Hz

Load Conditions Reported Quantity	100%* I ₀	75%* I ₀	50%* I ₀	25%* I ₀	0%* I ₀
Rms Output Current(mA)	2500mA	1875mA	1250mA	625mA	0mA
Rms Output Voltage(V)	8.939V	8.994V	9.050V	9.106V	9.162V
Active Output Power(W)	22.35W	16.86W	11.31W	5.69W	0.00W
Rms Input Voltage(V)	115V	115V	115V	115V	115V
Rms Input Current(A)	0.444A	0.348A	0.252A	0.145A	0.011A
Rms Input Power(W)	27.54W	20.48W	13.53W	6.80W	0.11W
T.H.D. (Voltage)	0.17	0.17	0.16	0.13	0.11
True Power Factor	0.537	0.509	0.465	0.404	0.091
Power Consumed by UUT(W)	5.19W	3.62W	2.22W	1.11W	0.11W
Efficiency	81.15%	82.34%	83.61%	83.69%	*
Average Efficiency	82.70%				*

- G. **AC Input Voltage** : 230Vac/50Hz

Load Conditions Reported Quantity	100%* I ₀	75%* I ₀	50%* I ₀	25%* I ₀	0%* I ₀
Rms Output Current(mA)	2500mA	1875mA	1250mA	625mA	0mA
Rms Output Voltage(V)	8.939V	8.994V	9.050V	9.106V	9.162V
Active Output Power(W)	22.35W	16.86W	11.31W	5.69W	0.00W
Rms Input Voltage(V)	230V	230V	230V	230V	230V
Rms Input Current(A)	0.300A	0.234A	0.163A	0.090A	0.016A
Rms Input Power(W)	27.29W	20.44W	13.76W	7.02W	0.21W
T.H.D. (Voltage)	0.23	0.19	0.15	0.12	0.09
True Power Factor	0.393	0.379	0.365	0.336	0.057
Power Consumed by UUT(W)	4.94W	3.58W	2.45W	1.33W	0.21W
Efficiency	81.89%	82.50%	82.21%	81.07%	*
Average Efficiency	81.92%				*

Tester : Wei

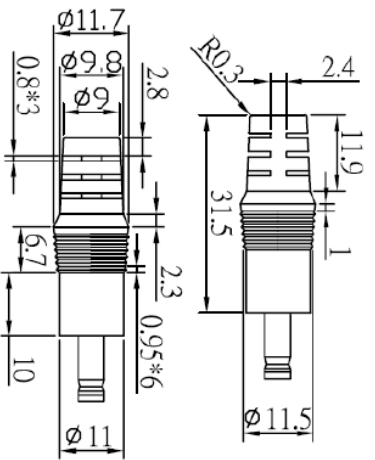
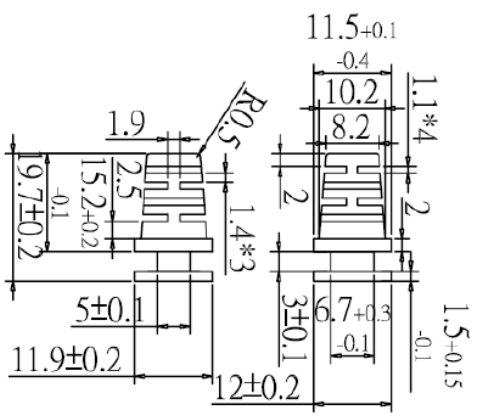
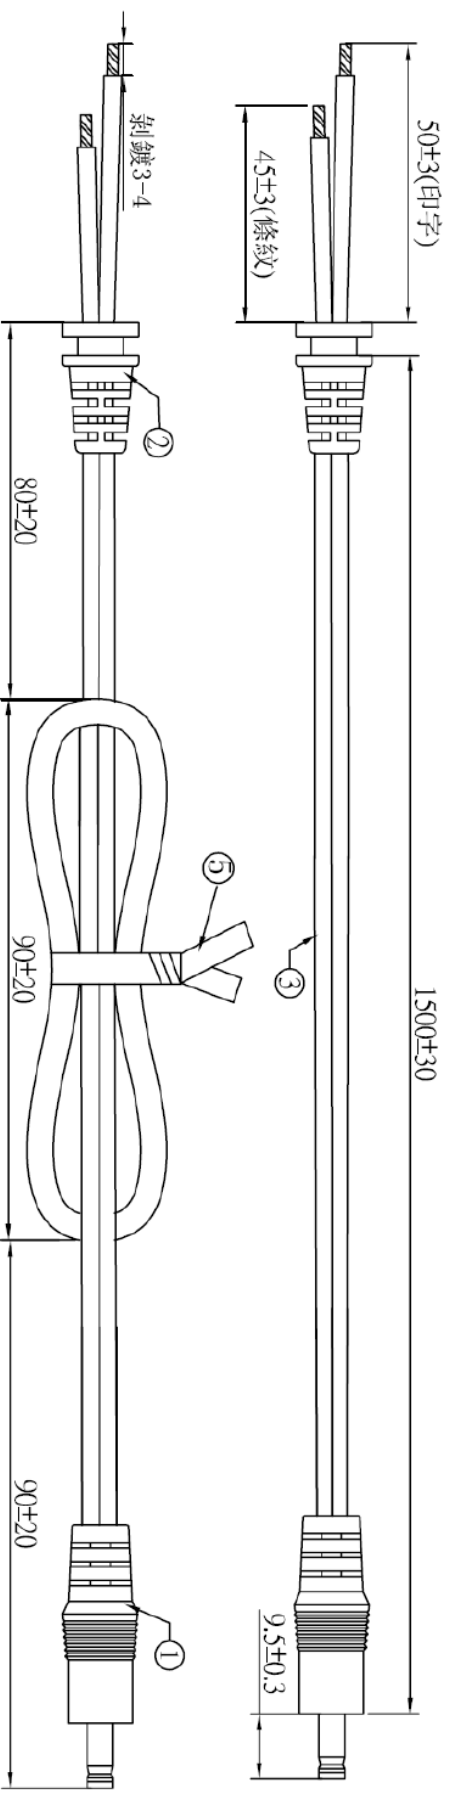


注意:此圖面所需材料符合"ROHS"標準

- ① 5.5*2.1*21 音叉車溝黑色半邊 (YY-PD-00023), 外模 P-184 號模 (二次成型), 用料外 PVC60P 黑色 (YY-PV-00009)
- ② SR-101 號模, 用料 PVC60P 黑色 (YY-PV-00009), 吊重: 1米/20磅/60秒
- ③ UL 2468 18AWG(0.16*41)*2C BK OD: 2.2*4.4 (YY-DC-00091) 裁線長度: 1560+10/-0
- ④ PE 有鐵芯 紫帶 12CM 黑色 (YY-ES-00001)
- ⑤ 絕緣阻抗: 20Ω, 導通阻抗: 1.5Ωmax
- ⑥ 單位: MM

料號	R44M1G1501D	
客戶	阿達特	制圖 劉錫鋒
版次	03	初審
頁數	01	審核
版次	03	批準
內容	變更線長	套序 零二 右 陽 八 三
圖號	AU1-0838	日期 2011/12/28

SHOW	REV	DESCRIPTION	DATE	APPROVED
	A	初版制作	13/08/12	

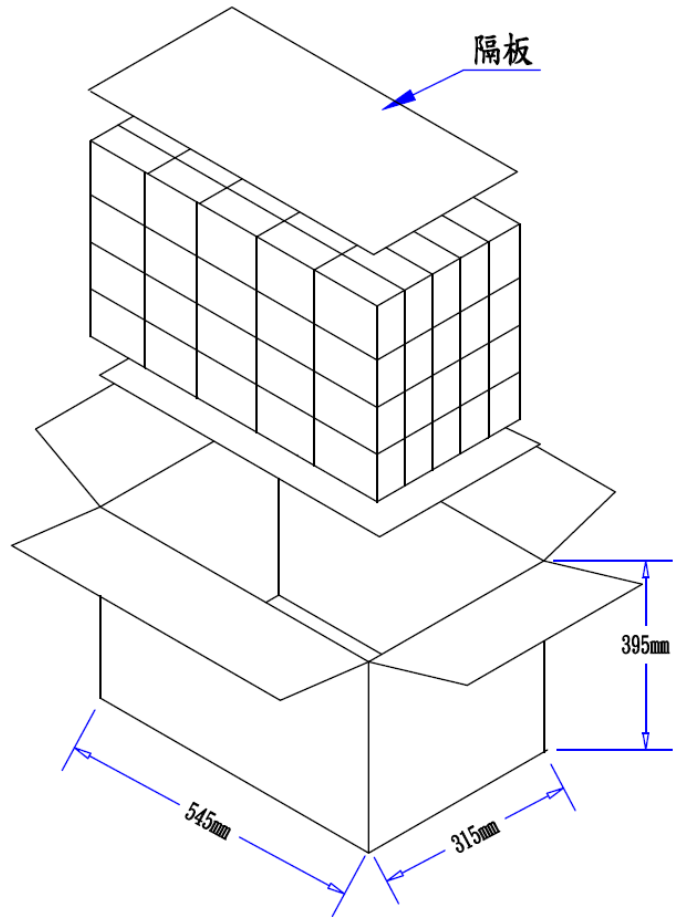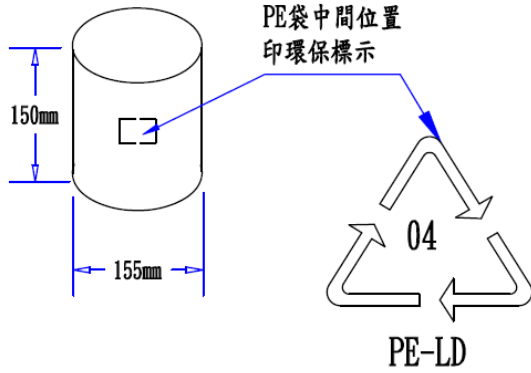

PIS18W00048 包裝(FOR 18W, 24W插牆式) 短環保PE泡袋厚0.09-白盒-100

9550006001 1. 隔板:530(L)*300(W)*6mm B=B 2/100

2. 數量:25*4=100PCS

9520006502 3. 外箱:545(L)*315(W)*395(H)mm K=K 1/100

9510003502 4. 白盒:105(L)*60(W)*90(H)mm 350P+CE(即C9紙加裱350磅白板紙) 1/1

9540008801 5. 環保PE袋:150(L)*155(W)*0.09mm 無色透明,單端開口,中間位置印環保標示. 1/1

6. 成品裝入PE袋后封好,再放入外箱,方向必須統一.

7. 外箱,白盒標注為外徑尺寸

8. 上述所有材料須符合環保ROHS標準.

DRAWING NO. PIS18W00048		APPROVAL 1 BY	
UNIT mm	MODEL NO. 18W, 24W(插牆式)	APPROVAL 2 BY	
	FILE NO. ADT-0211	CHECKED BY(ENGINEER)	
SCALE	REV. A	SHEET 1/1	DRAWN BY 李金朝 DATE: 2013/08/12