



RoHS

Specifications

Current Rating : 3 Amps
 Insulator Resistance : 1000 Megohms min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 600V
 Operating Temperature : -40°C ~ +105°C
 Contact Material : Brass
 Insulator Material : Polyester, UL 94V-0 P.B.T.
 Contact Plated : Standard:Full Gold Flash



Recommended P.C. Board Hole Layout



Order Information

2 1 6 0 - A 6 - S 1 XX - 0EX GA

Serial Type
 Terminal Option
 S : Straight Type
 Row Type
 1 : Single Row
 No. of Pin Per Row
 Elevated Story Option
 0EX : See Option
 Contact Plating
 GA : Gold Flash

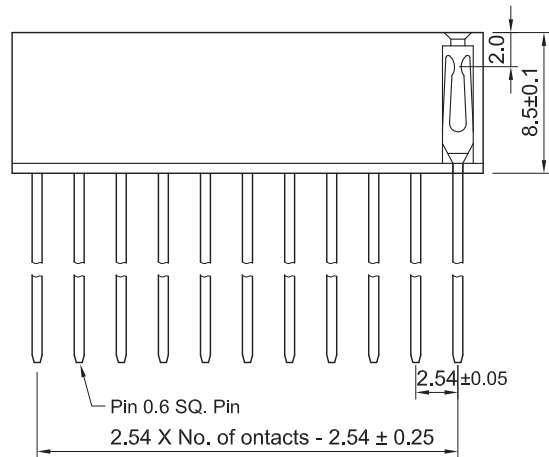

Option

Elevated Story Option	H	A
0EA	8.50	9.92
0EB	8.50	10.30
0EC	8.50	4.84

GENERAL TOLERANCE		單位 (UNIT)	料號 (PART NO.)		圖號 (DWG NO.)		名稱 (TITLE):	
X . ± 0.50	X . ° ± 5 °	mm	2160-A6-S1xx-0ExGA		2160-A63		Female Header P2.54mm	
. X ± 0.20	. X ° ± 2 °		審核 (APPROVAL)	核對 (CHECKED)	製圖 (DRAWN)	比例 SCALE 3:1	張數 SHEET 1/1	Elevated Story, Single Row, Straight Type
. X X ± 0.10	. X X ° ± 1 °	James	Huang	Fen-Fen	角法 PROJ.	更改 REV. A		
DATE	11-04-08		14-04-15	01-04-15	11-04-08			