
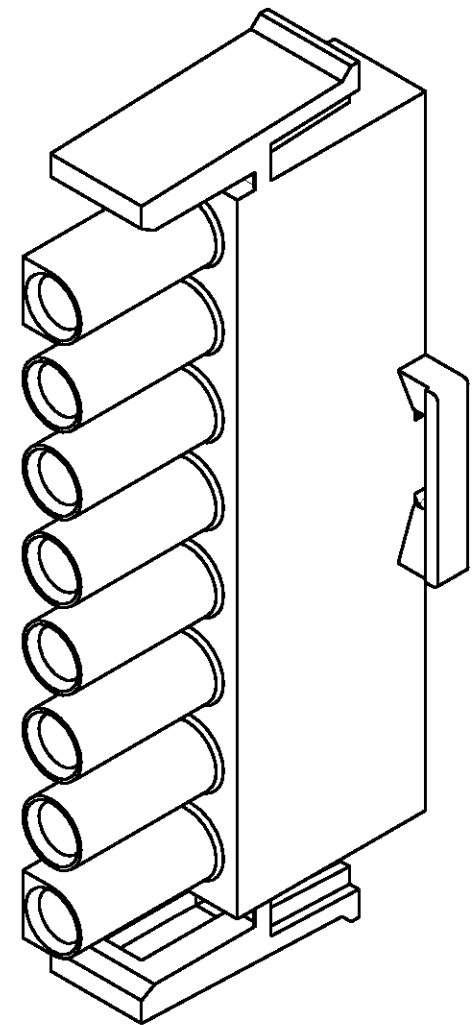
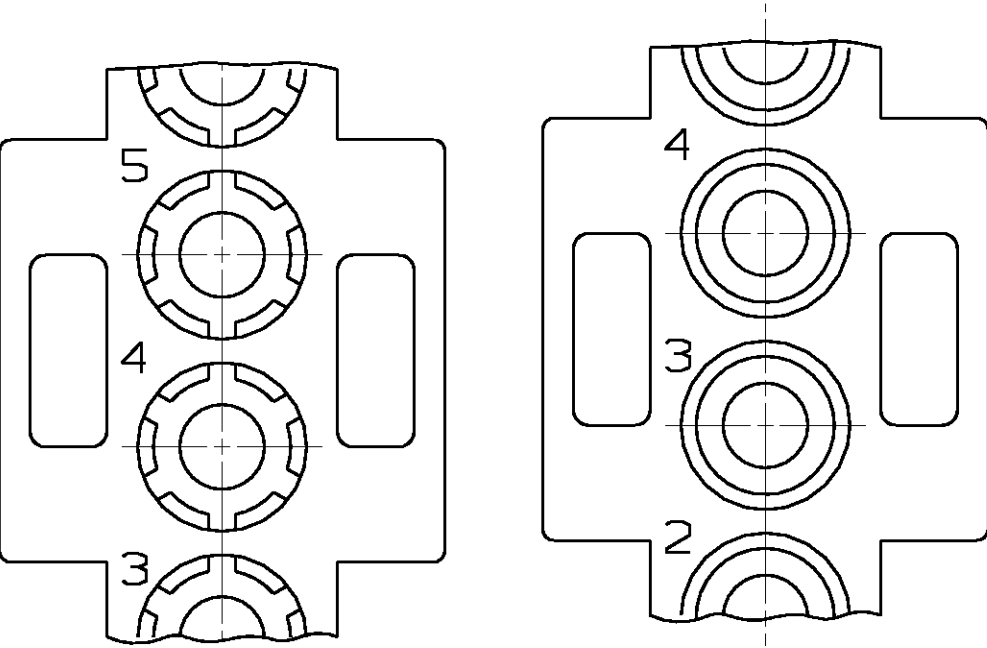
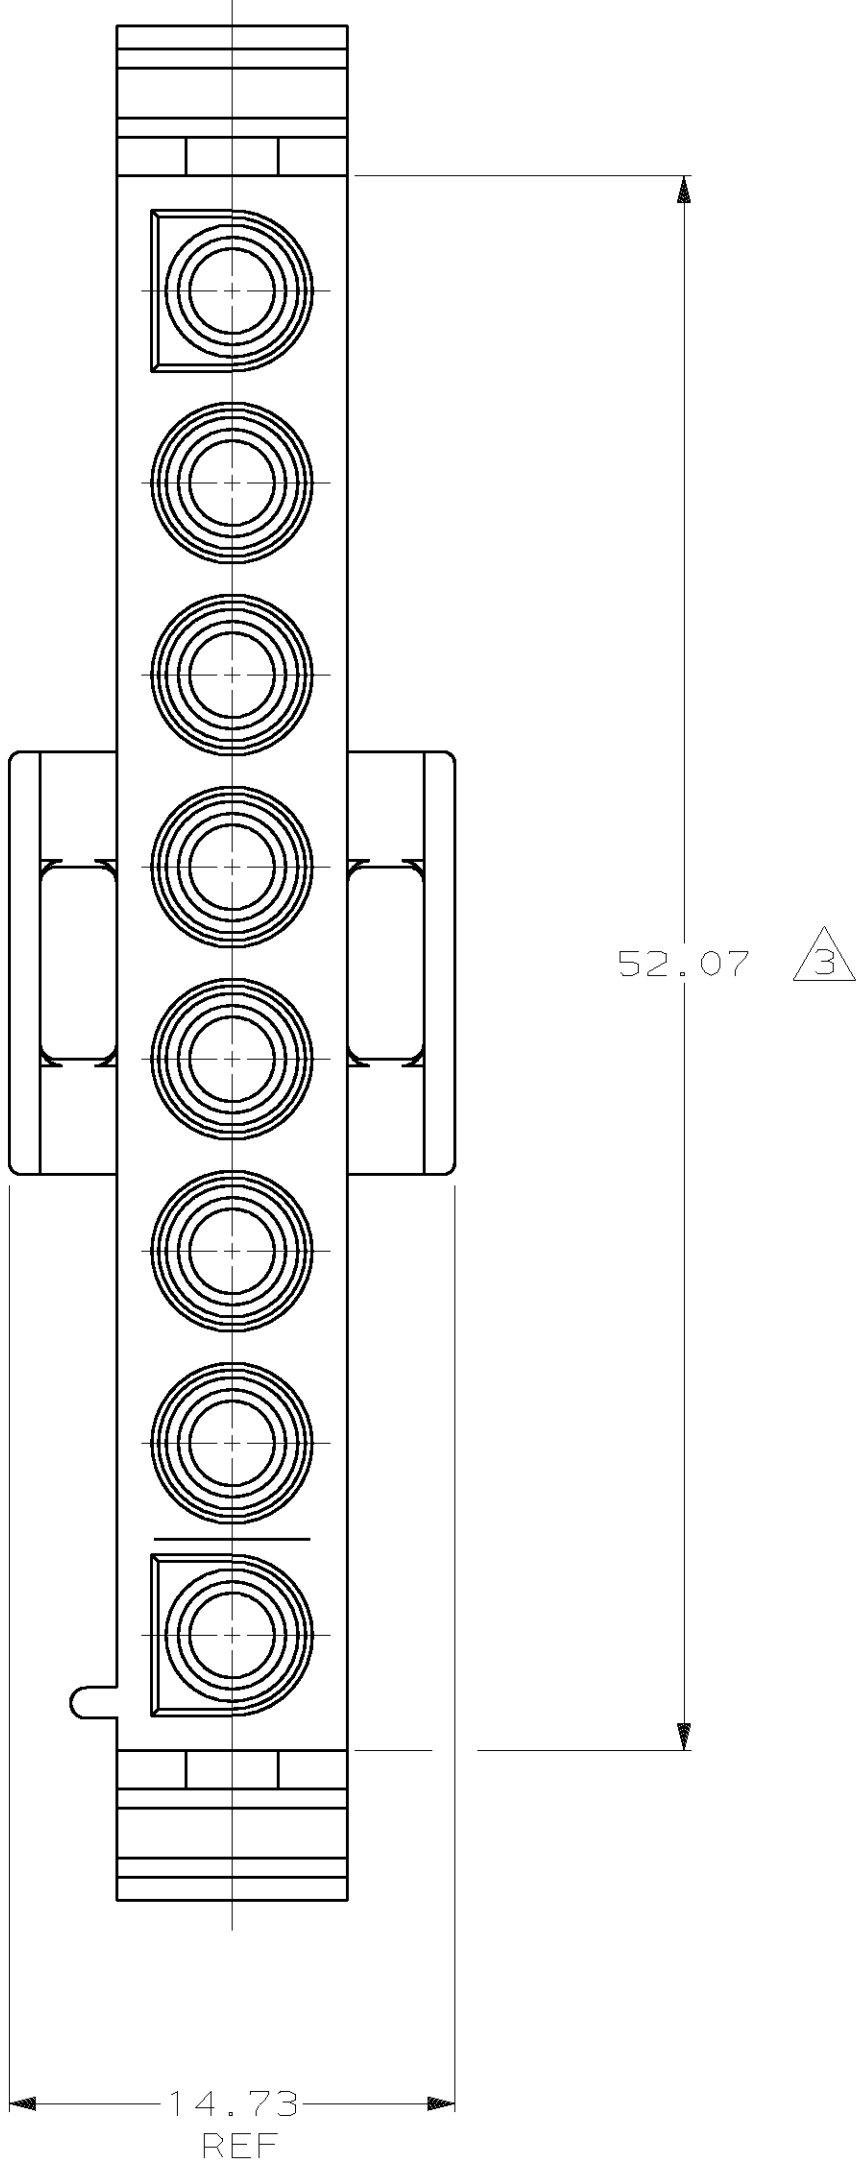
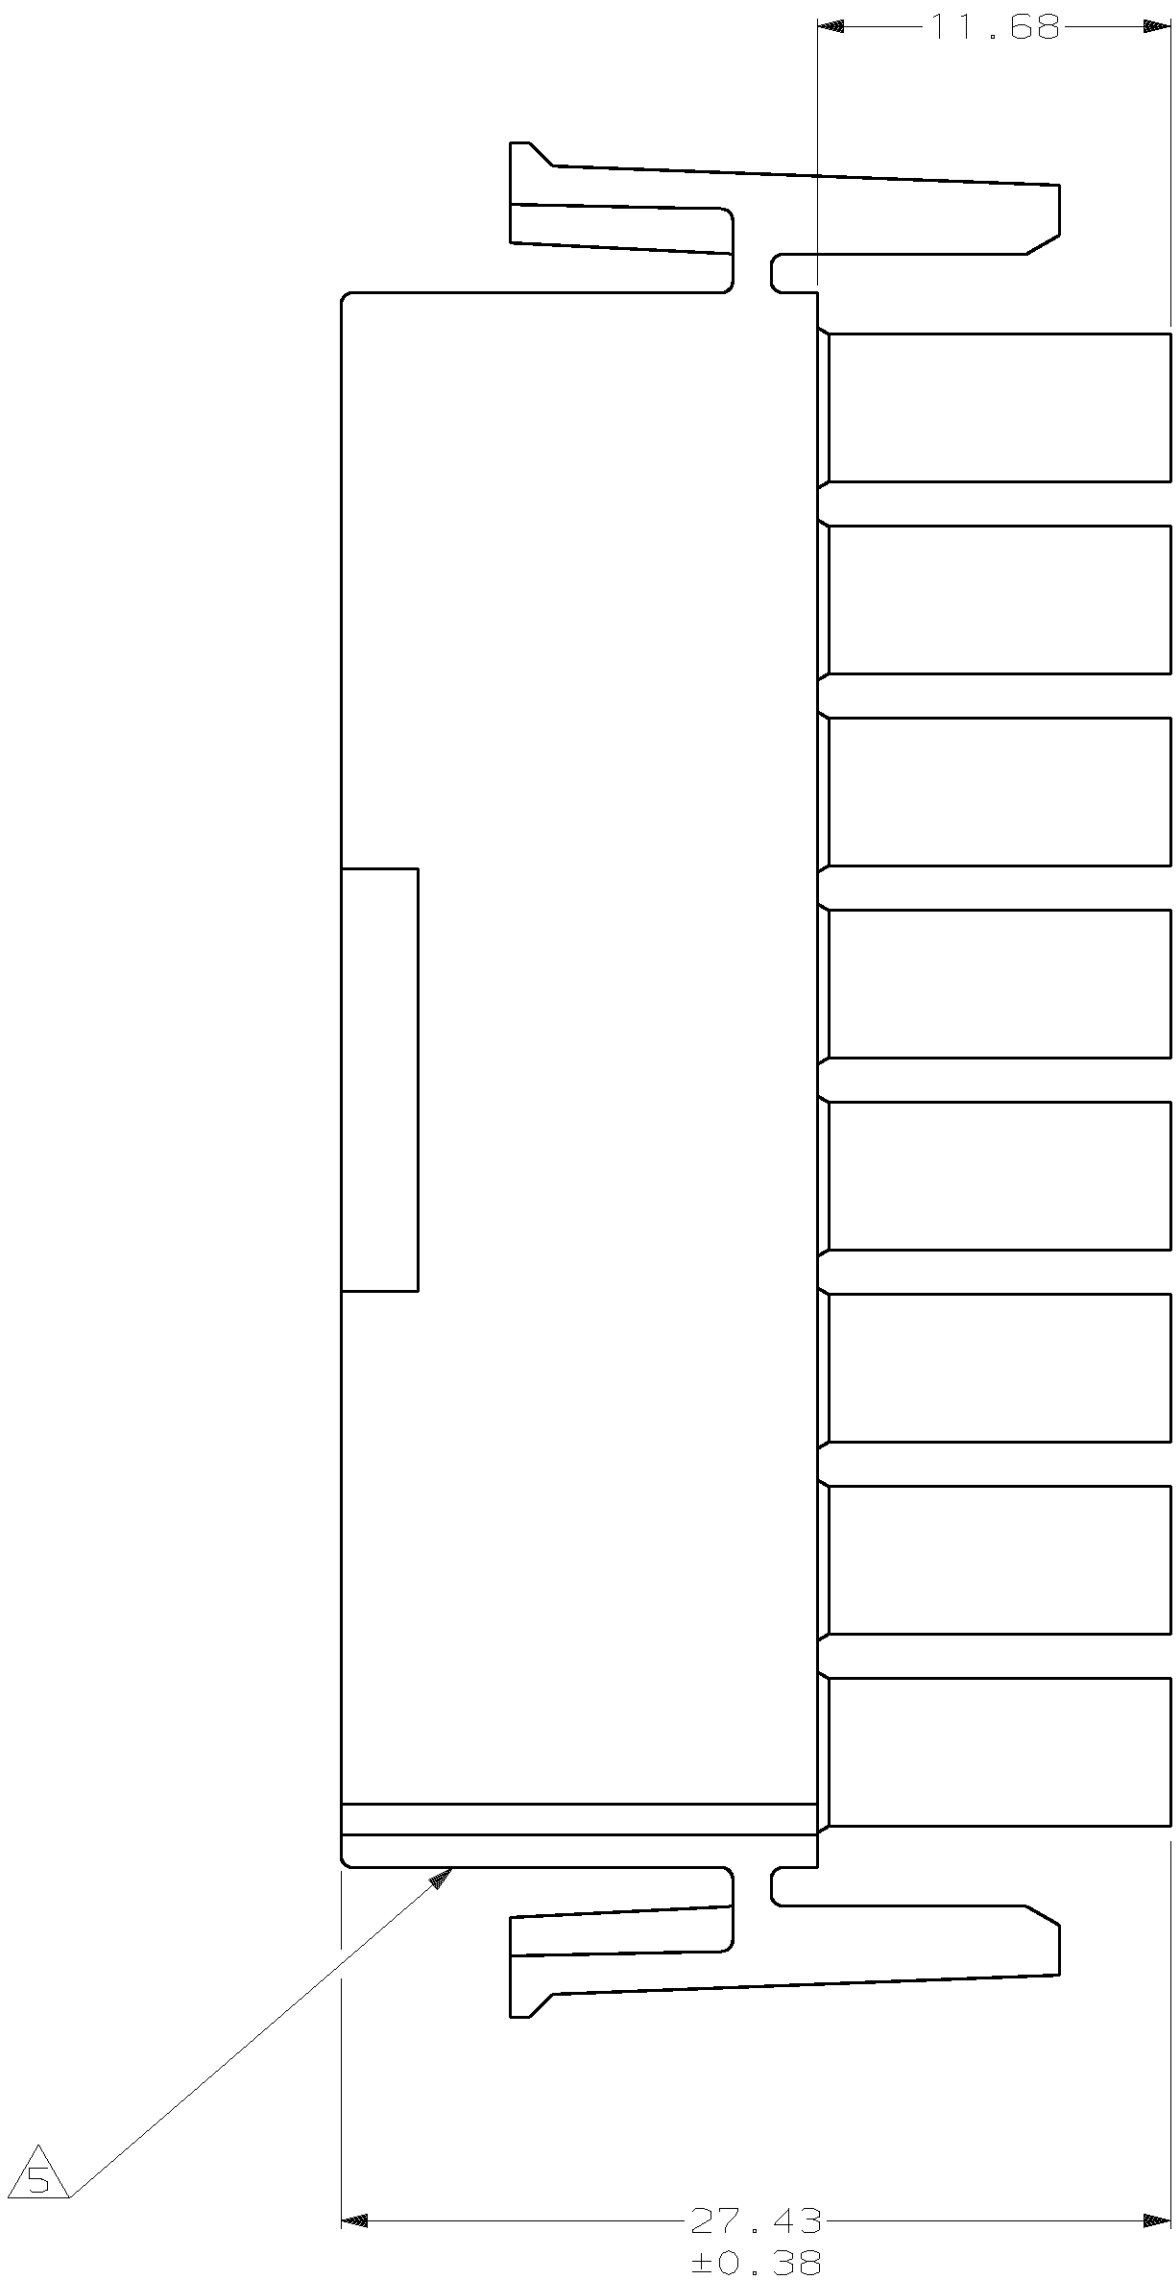


LOC		DIST				REV		REVISIONS			
CM	53	P	F	ZONE	LTR	DESCRIPTION		DATE	APPD		
				5		REV PER EC 061B-0229-98		18-FEB-99	JH	RS	

1. MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ CAP OR HEADER.
2. SMALL NICKS ARE PERMITTED ON THE CIRCUIT TOWERS WHICH COULD INCREASE THE INITIAL HOUSING MATING FORCE BY UP TO 4.4 NEWTONS [1.0 LBS]. NO INDIVIDUAL NICKED TOWER SHALL INCREASE THIS FORCE BY OVER 2.2 NEWTONS [.5 LBS].
3. DIMENSION INDICATED IS AS MOLDED. ADDITIONAL GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR.
4. FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. NO RIBS OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
5. UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.

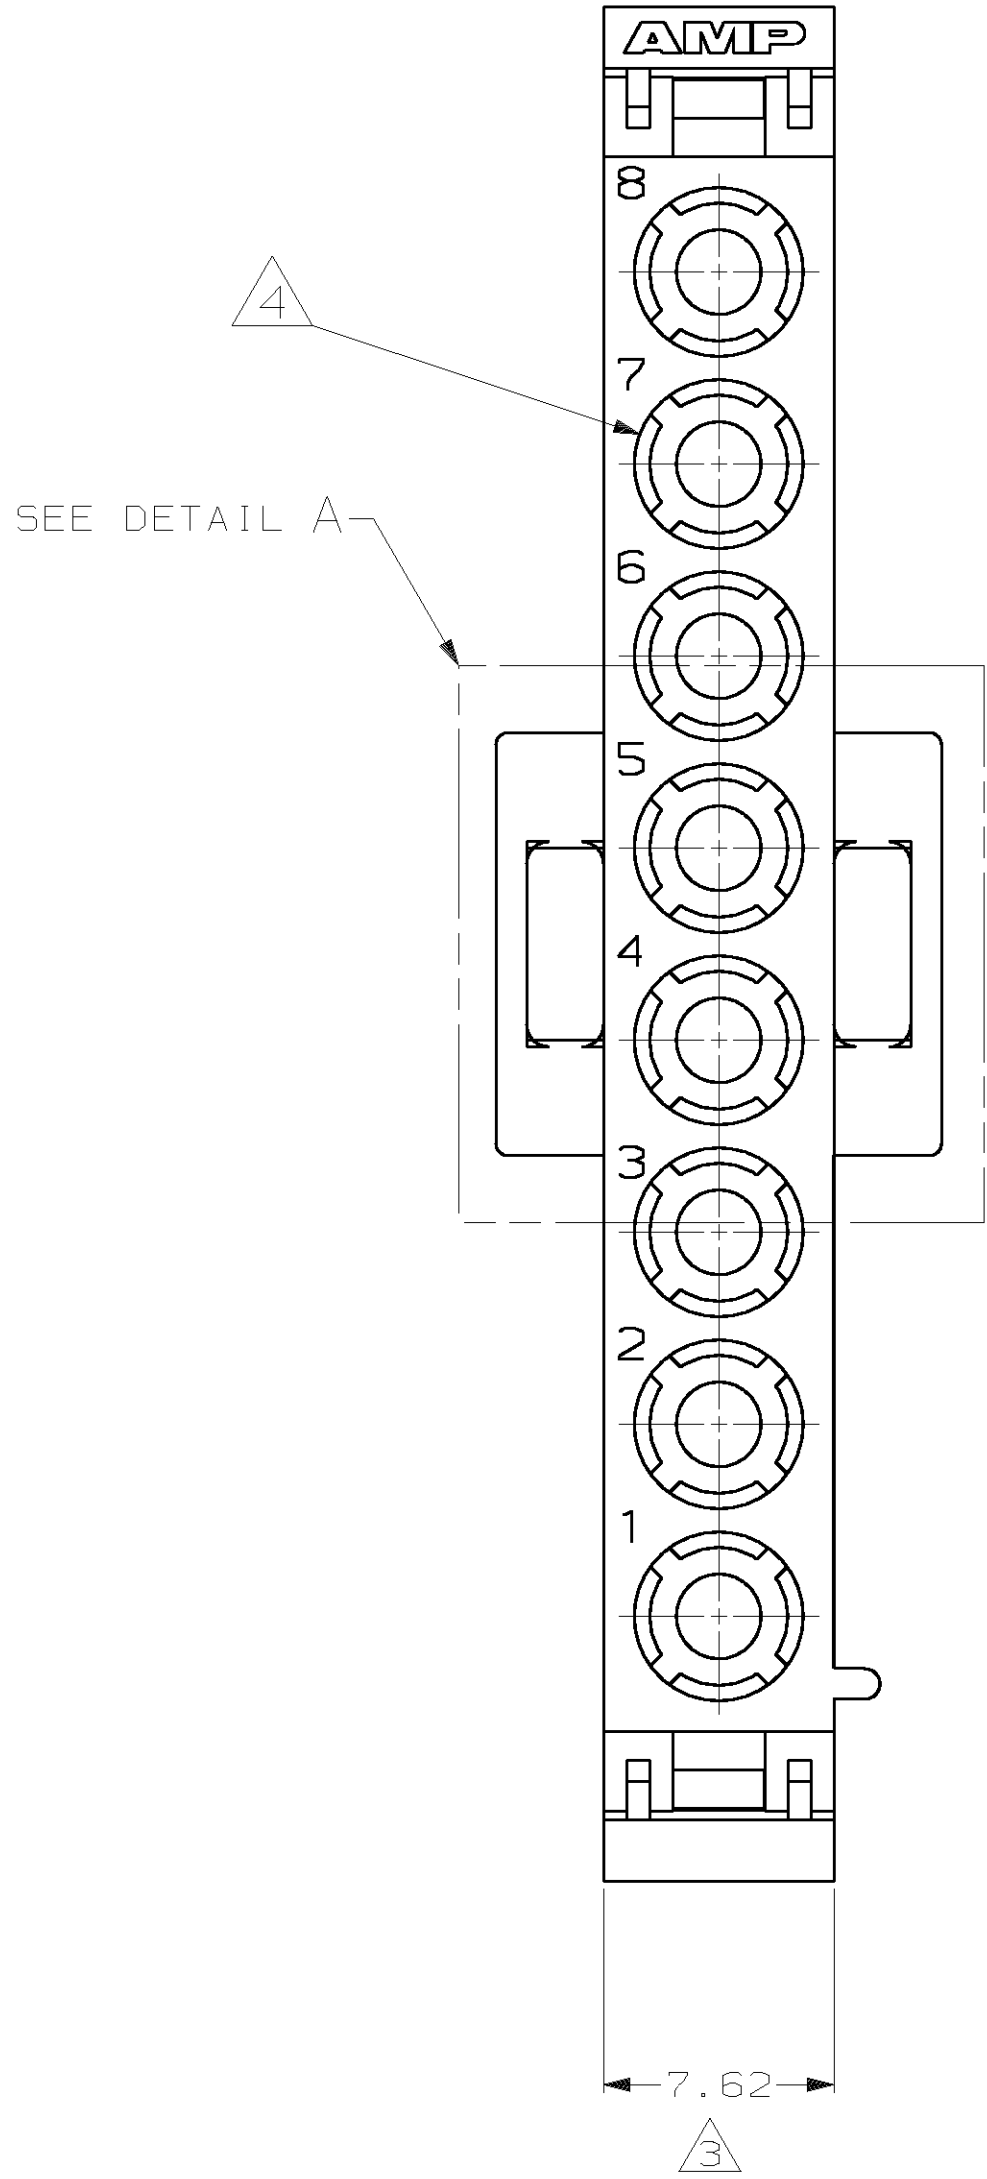

3-DIMENSIONAL MODEL
NTS

52.07	2.050
27.43	1.080
14.73	.580
11.68	.460
7.62	.300
0.38	.015
0.13	.005
MM	IN
CONVERSION TABLE	

METRIC

				PART NO			
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON : 2 PLC DEC ± 0.13 3 PLC DEC ± - ANGLES ± 0°30' MATERIAL NYLON,UL 94V-0 FINISH -		DR 2-28-92 K. WHITAKER		AMP AMP Incorporated Harrisburg, PA 17105-3608			
		CHK 2-28-92 R. SWING					
		APPD 3-5-92 D. SELF				NAME	
		APPD 3-5-92 D. SELF				PLUG, 8 CIRCUIT, UNIVERSAL MATE-N-LOK™	
PRODUCT SPEC -							
APPLICATION SPEC -		SIZE D	CAGE CODE 00779	DRAWING NO 640582			
WEIGHT -		SCALE 4:1	SHEET 1 OF 1				