

ENGLISH

Datasheet

2.77mm Pitch 37 Way IDC D-sub Connector, Socket, **Metal Shell**

RS Stock number 642-4929



SPECIFICATION MATERIAL Insulator: Polyester Resin And Glass Fiber Reinforced (UL94v-0) Contacts: Phosphor Bronze CONTACT FINISH: 30u" Selective Gold Over Nickel PART NO. $\frac{222}{1} \stackrel{A}{=} \frac{E}{3} \frac{XX}{4} \stackrel{F}{=} \frac{SM}{6} \stackrel{P}{=} \frac{4}{7} \stackrel{3}{=} \frac{Y}{10}$ 8.SHELL OPTION: 1.SERIES NO: 222=D-SUB 2.TYPE: A=Standard **3.GREEN OPTION** 9.CONTACT PLATING: E=RoHS 4.CONTACT NUMBER: 09.15.25.37 10.COLOR: 5.CONTACT TYPE: Y=Black F=Female 6.HOSING CONSTRUCTION TYPES SM=Metal Shell With Standard Thru Holes 7.STRAIN RELIEF:


P=Plastic Strain Relief

4=Tin Plated Shell Without Grounding Indents 3=30u" Gold (Selective) (1Pcs/Bag+Yellow Label) (100Pcs/Bag+White Label)



ENGLISH

Drawing (mm):

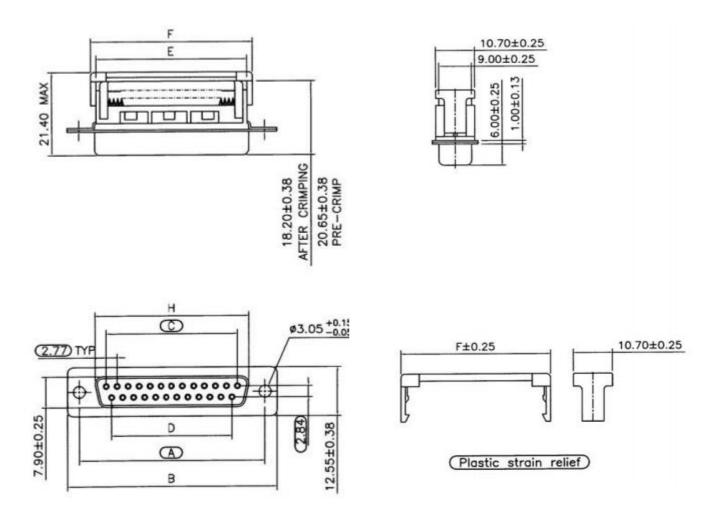

Dimensions (mm):

POSITION	A±0.13	B±0.25	C±0.25	D±0.13	F±0.25	H±0.25
09	24.99	30.80	11.08	8.31	18.60	16.33
15	33.32	39.10	19.39	16.62	26.60	24.66
25	47.04	53.09	33.24	30.47	40.90	38.38
37	63.50	69.40	49.86	47.09	57.10	54.84

RS, Professionally Approved Products, gives you professional quality parts across all products categories. Our range has been testified by engineers as giving comparable quality to that of the leading brands without paying a premium price.