
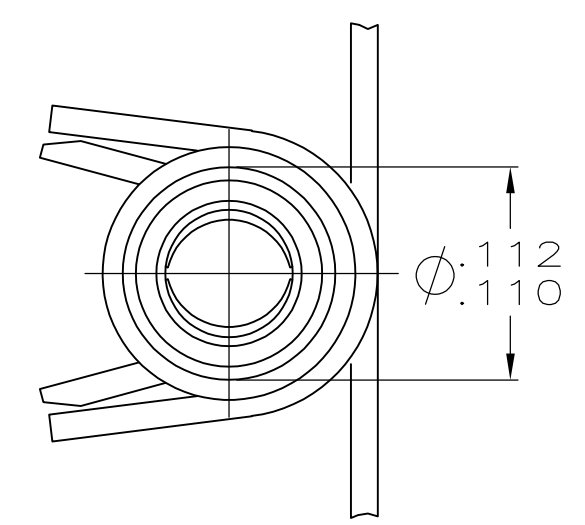


D

C

B

A

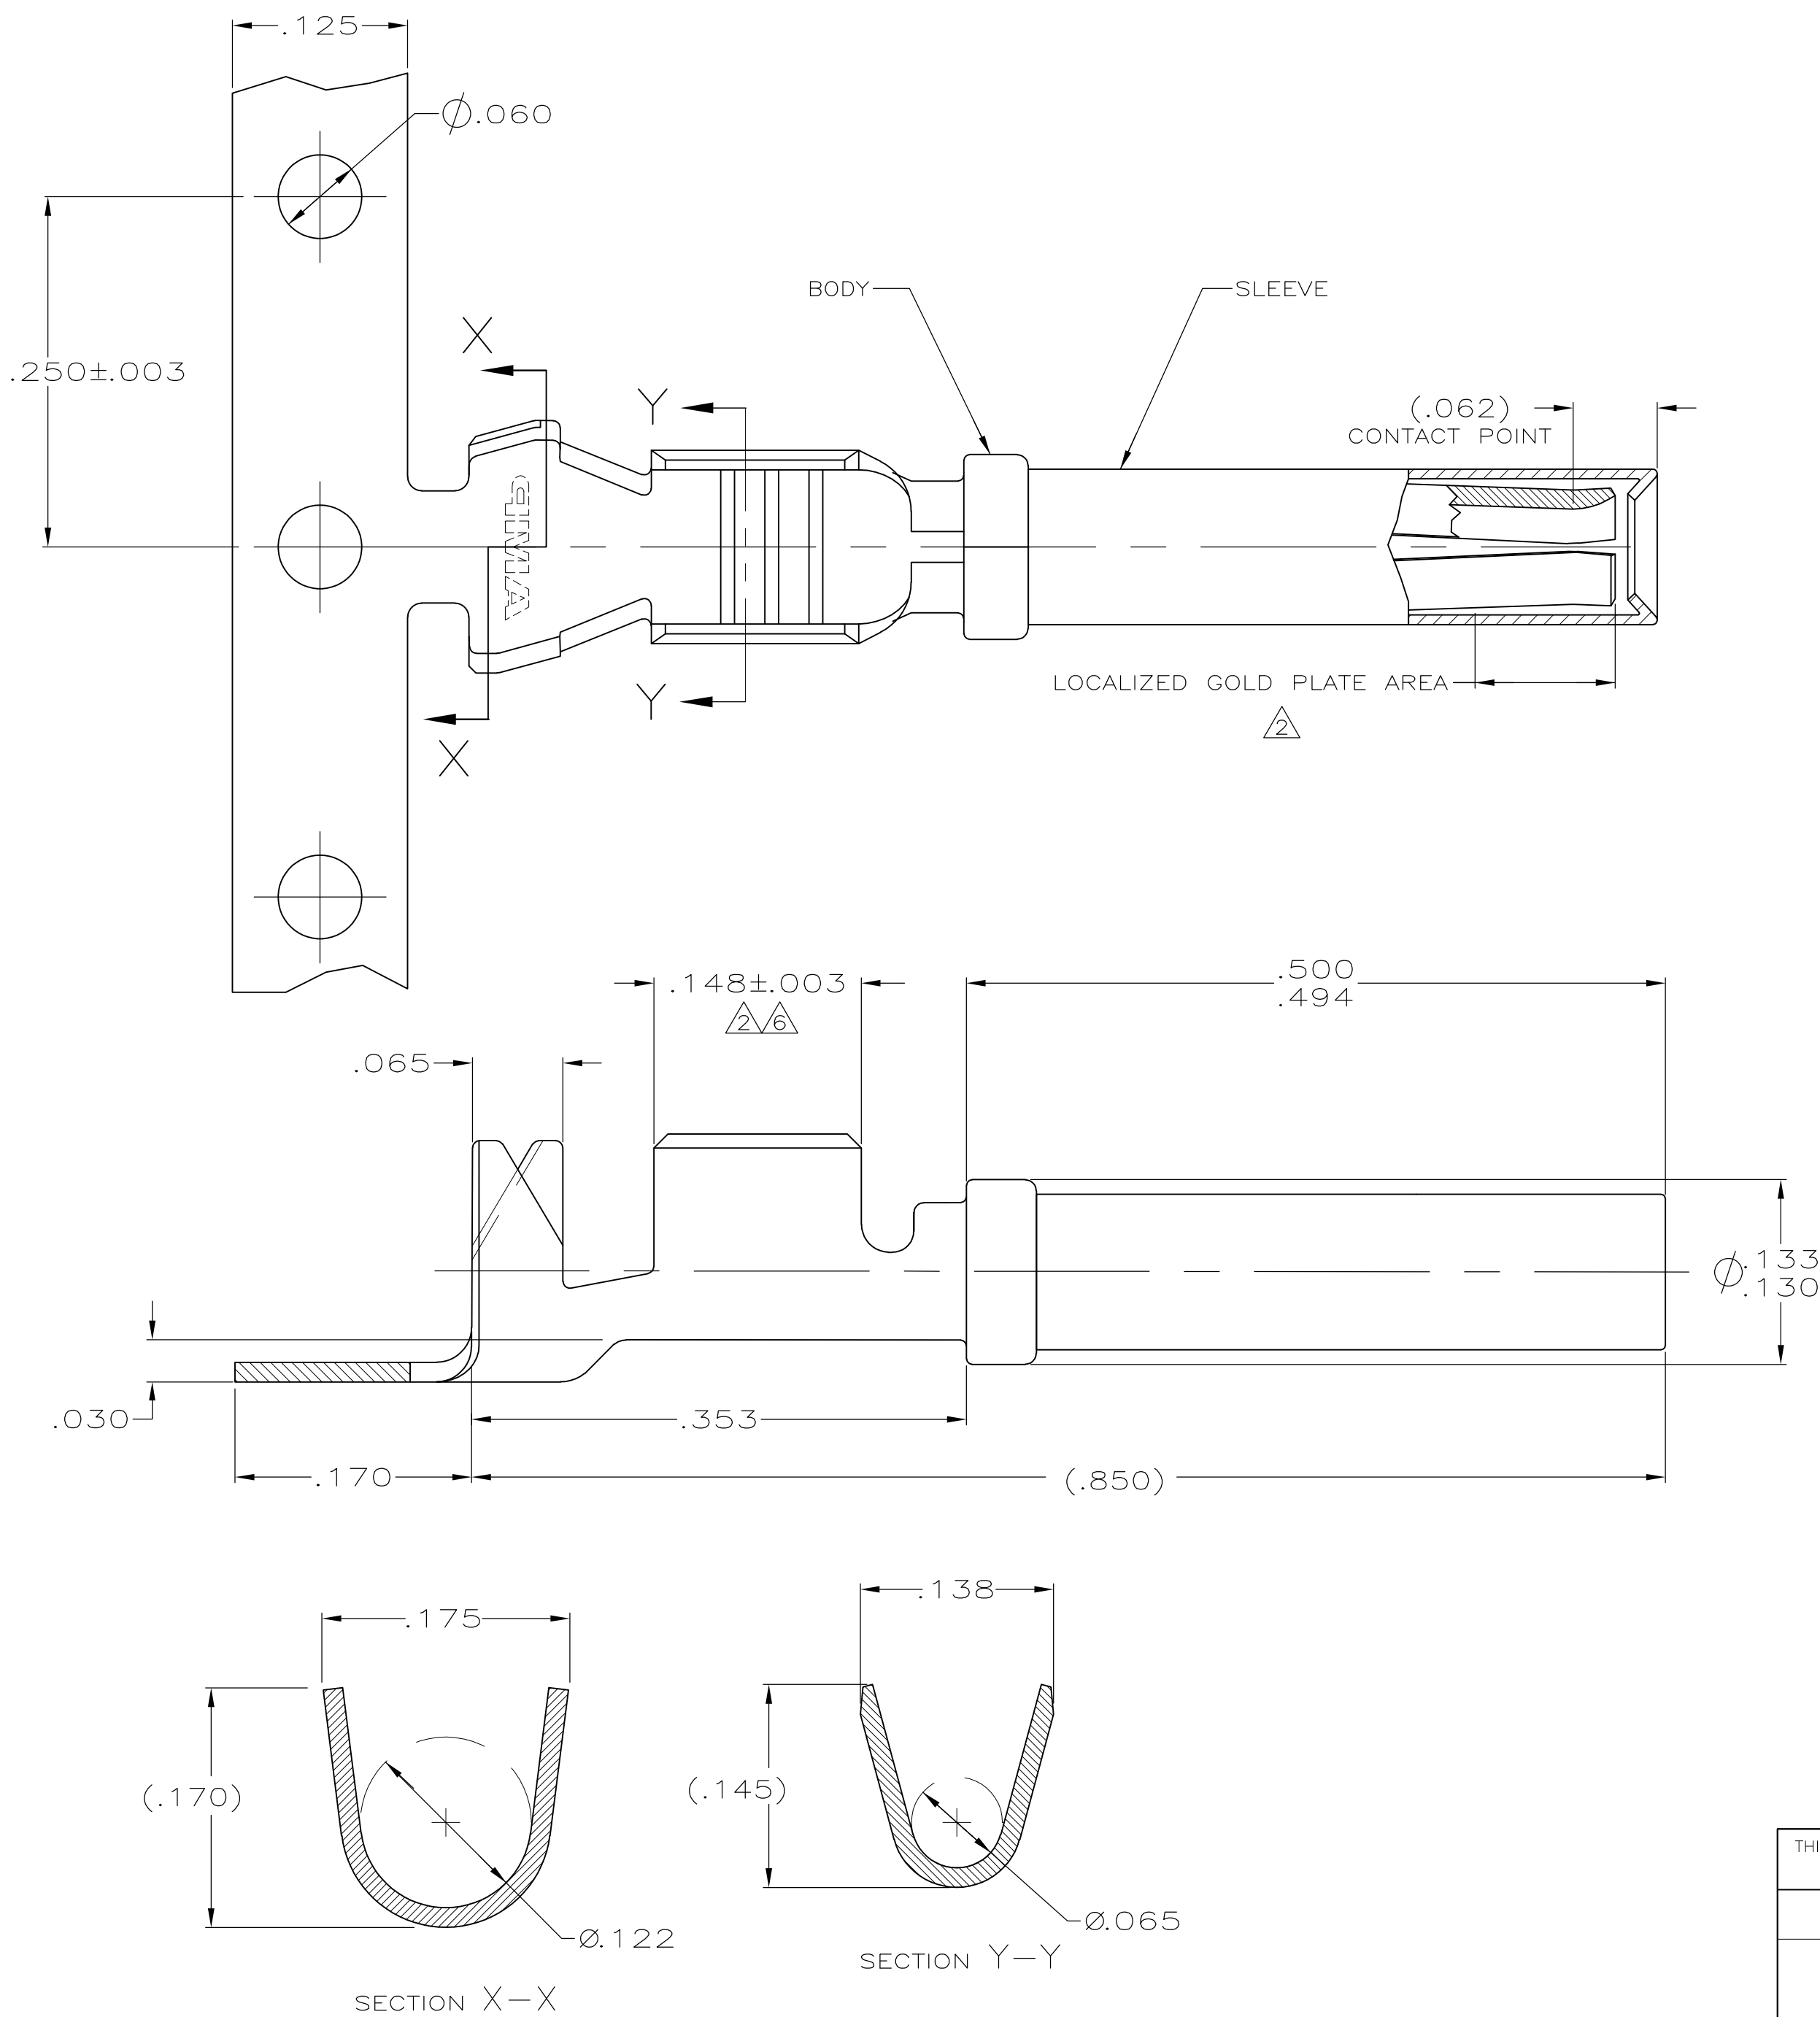

- 1 MATERIAL:
BODY - .014 THK COPPER ALLOY
SLEEVE - .007 THK STAINLESS STEEL
- 2 FINISH:
BODY - .000030 MIN SELECT GOLD IN LOCALIZED GOLD PLATE AREA
AND .000100-.000200 TIN IN LOCALIZED TIN PLATE AREA
ALL OVER .000040-.000080 THK NICKEL
SLEEVE - PASSIVATE PER 112-230-2, METHOD I
3. CONTACT TO BE LUBED WITH LUBRICANT PER P/N 22014-4
4. WIRE RANGE: 18-14 AWG GXL AND 18-16 AWG SXL WIRE WITH INSULATION DIAMETERS OF .089-.131 INCHES
5. SLEEVE MUST WITHSTAND PULL OFF FORCE IN DIRECTION PARALLEL TO CENTER OF TERMINAL OF 10 LBS MIN
- 6 FINISH:
BODY - .000100-.000200 TIN IN LOCALIZED TIN PLATE AREA.
ALL OVER .000040-.000080 THK NICKEL.
SLEEVE - PASSIVATE PER 112-230-2, METHOD I

776492

B

A